



McLeod flywheels are zero balanced units. Many engines require zero balanced flywheels (Internally balanced). If your engine requires an external balance weight, the amount of external weight is easily added to the flywheel by following these easy steps. Determine your engine displacement and balance weight requirement:

Ford Engines: One weight position. See Figure 1 & 2 **Long screws must be used on Aluminum Flywheels !**


Install small (28 in oz) or large (50 in oz) weight. Attach with supplied screws. '68 - '80 302/5.0L Require 28 in oz weight.

- | | |
|--|---|
| '81 - '01 302/5.0L Require 50 in oz weight. | '70 - '74 351C Require 28 in oz weight. |
| '69 - '97 351W Require 28 in oz weight. | '79 - '99 460 Require 28 in oz weight. |
| '77 - '82 351M & 400M Require 28 in oz weight. | '66 - '70 428 Require 28 in oz weight. |

Chevrolet Engines: Two weight positions (A or C). See Figure 3 & 4 **Be certain to mount weight in correct position! Long screws must be used on Aluminum Flywheels !**

- '86 - '97 305/350 Install smallest weight (radius edges) in position A. Attach with supplied screws.
- '70 - '85 383/400 Install small weight (weight with sharp corners, 4" wide) in position C. Attach with supplied screws.
- '70-'90 454 Install medium weight (5" wide) in position C. Attach with supplied screws.
- '91+ 454 Install large weight (6" wide) in position C. Attach with supplied screws.
- '91+ 502 Install large weight (6" wide) in position A. Attach with supplied screws.

Mopar Engines: Two weight positions (A or C). See Figure 5 & 6 **Be certain to mount weight in correct position! Long screws must be used on Aluminum Flywheels !**

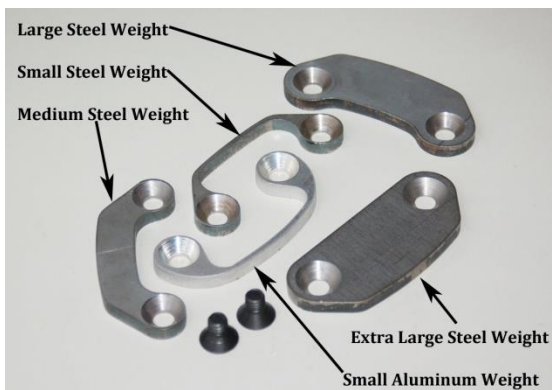

- 340 CID '71-'76 w/cast crank Install small aluminum weight in position A. Attach with supplied screws.
- 360 CID '71-'02. Install large weight in position A. Attach with supplied screws.
- '94-'02 Magnum engines. Install Extra large weight in position A. Attach with supplied screws.

'71+ 383/400/440 w/cast crank. Install medium steel weight in position C. Attach with supplied screws.

'70-'72 440 w/ 4BBL & 6BBL. Install small steel weight in position C. Attach with supplied screws.

Use long screws on Aluminum Flywheels. Use short screws on Steel Flywheels

Typical examples are shown below. Be certain you mount the correct weight in the specified location!

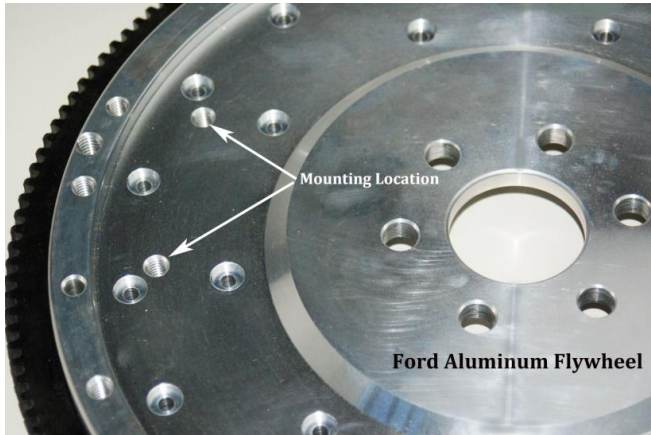


Figure 1

Ford Aluminum Flywheel

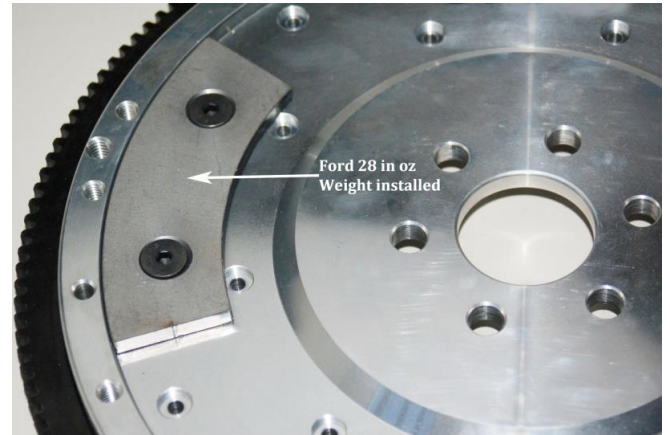


Figure 2

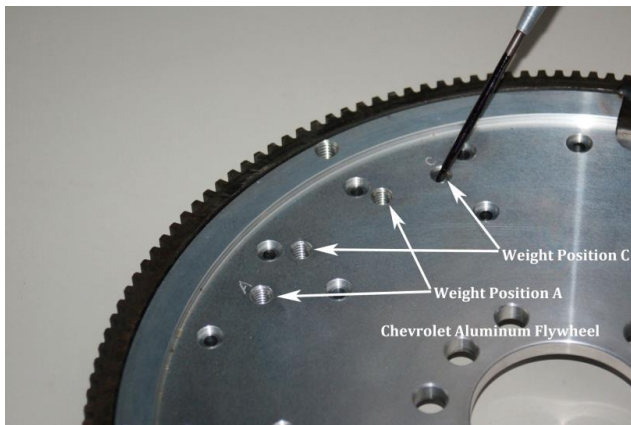


Figure 3

Chevrolet Aluminum Flywheel



Figure 4

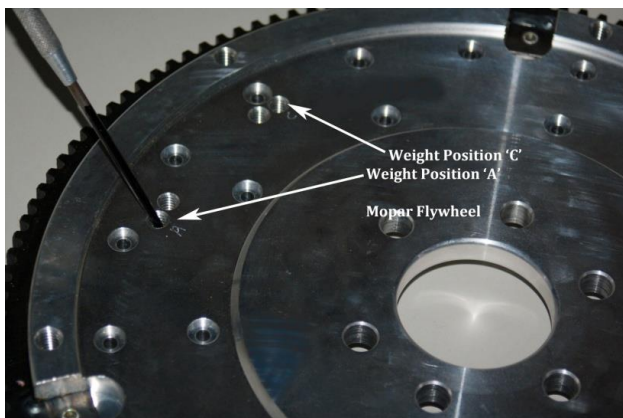


Figure 5

10019

Mopar Aluminum Flywheel

www.mcleodracing.com

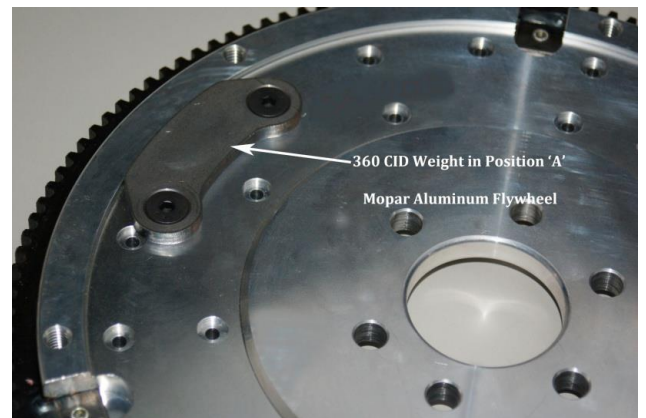


Figure 6

(714) 630-2764



Thank you for your purchase at McLeod Racing. If you require assistance with your new product, please call (714) 630-2764 and ask for the tech line.

Please refer to www.mcleodracing.com for the most current and up to date instructions for your McLeod product.

Limited Warranty

McLeod Racing LLC, products are warranted to be free from defects in material and workmanship for the period of ninety (90) days, from the date of purchase. McLeod does not warrant or make any representations concerning its products when not installed and/or used strictly in accordance with the manufacturer's instructions for such; installation and operation, and in accordance with good installation and maintenance practices of the automotive industry. Products purchased used do not carry a warranty. This warranty is to the original purchaser and is non-transferable.

McLeod Racing LLC will not be held liable for the labor charges and other intangible or consequent losses that might be claimed as a result of the failure of any part, nor shall it be liable for damages or injury to persons or property resulting from the misuse or improper installation of any part subject to this warranty.

No merchandise may be returned for any reason unless prior return merchandise authorization number (RMA) has been obtained from McLeod. An RMA number may be obtained via www.mcleodracing.com or by calling McLeod directly.

McLeod Racing LLC reserves the right to examine all parts returned for warranty claim to determine whether or not any such part has failed because of a defect in material or workmanship. McLeod's obligation under this warranty shall be limited to repairing, replacing or crediting, at its option, any part found to be defective. All products returned to McLeod for warranty inspection must be prepaid by the customer under this warranty.

In a racing environment, the type of stress placed on automotive parts can vary dramatically by the type of use, driving style, track preparation, differing tire style and other variables that are out of McLeod's control. For this reason, any parts used in a racing environment shall be void of any warranty either expressed or implied.

There are no other warranties, either expressed or implied including, but not limited to, warranty of merchantability, and warranty of fitness for a particular purpose which extend beyond those set forth in the preceding paragraphs. This warranty shall be interpreted and applied in accordance with California law.

For any changes or updated versions of the warrant described above, please refer to www.mcleodracing.com before installation of product.

