BARRICADE

Part List

Front

"734L" for Left/Driver Side

"734R" for Right /Passenger Side

Driver/Left Side Front Bracket

Passenger/Right Side Front Bracket

Driver/Left Side Center/Rear Bracket x2

**Passenger/Right Side Center/Rear Bracket x2**

x12
10mm x 25mm Hex Bolt
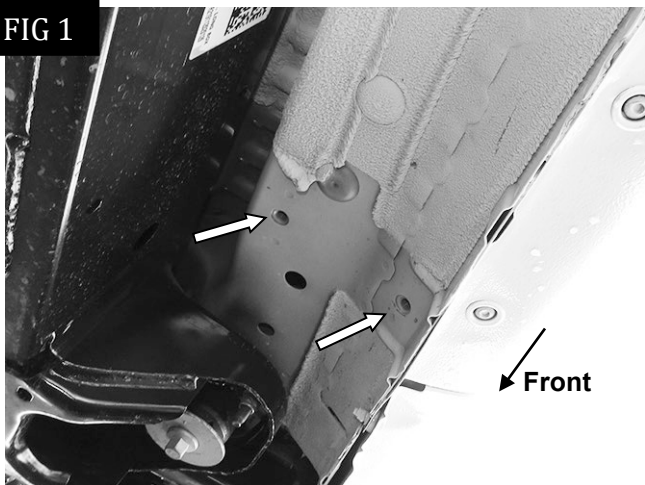
x12
10mm Flat Washer

x12
10mm Lock Washer

x12
8mm x 25mm Combo Bolt

PLEASE NOTE THAT THE FOLLOWING PICTURES ARE BASED ON THE PASSENGER SIDE INSTALLATION

STEP 1

Starting from underneath the Passenger/Right body panel, locate the front mounting location and the threaded holes in the body panel, **(Fig 1)**. Remove the plastic plugs covering the holes.
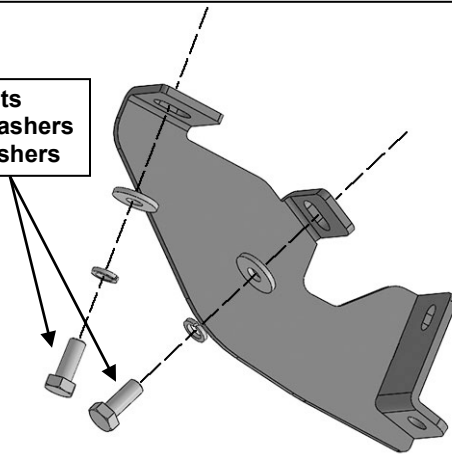

Front

(Fig 1) Passenger/Right front mounting location

STEP 2

Select the Passenger/Right Front Mounting Bracket. Attach the Mounting Bracket to the front location with (2) 10mm Hex Bolts, (2) 10mm Lock Washers and (2) 10mm Flat Washers, **(Fig 2)**. Do not tighten hardware.

FIG 2

(2) 10mm Hex Bolts
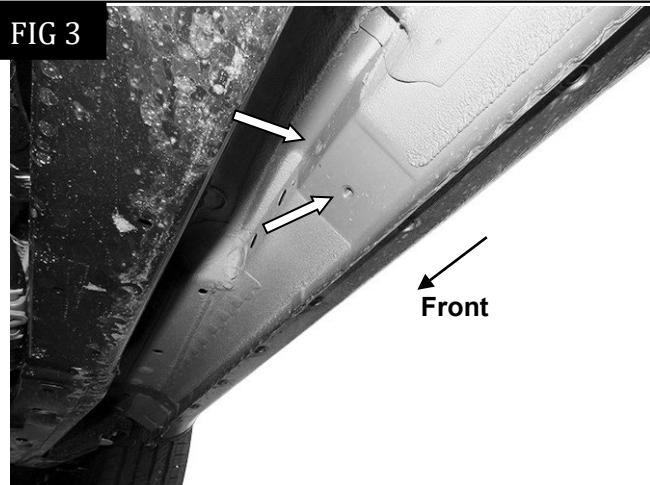**(2) 10mm Lock Washers**
(2) 10mm Flat Washers

(Fig 2) Attach the Passenger/Right Front Mounting Bracket to the front location
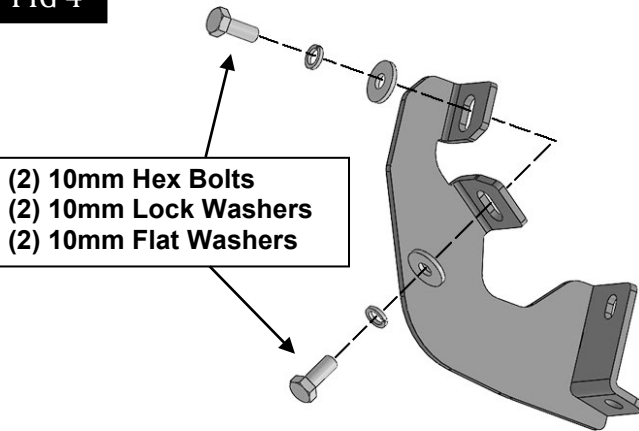
STEP 3

Repeat **Steps 1-2** to attach (2) Passenger/Right Center/Rear Mounting Brackets to the center and rear locations, **(Figs 3-5)**. Do not tighten hardware.
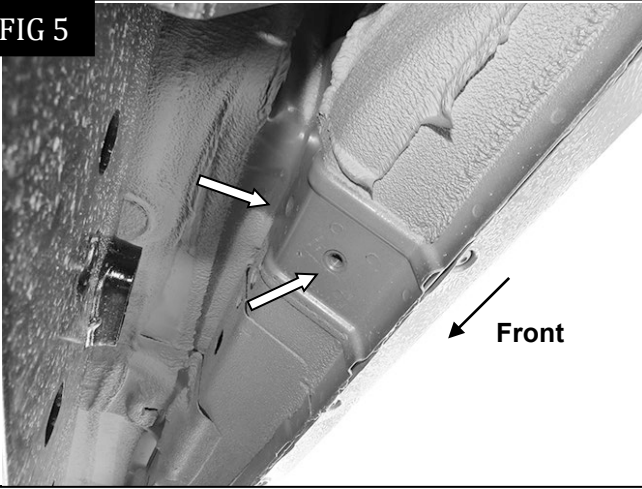

Front

(Fig 3) Passenger/Right center mounting location

FIG 4

(2) 10mm Hex Bolts
(2) 10mm Lock Washers
(2) 10mm Flat Washers

(Fig 4) Attach (1) Passenger/Right Center/Rear Mounting Bracket to the center location

FIG 5

Front

(Fig 5) Passenger/Right rear mounting location

STEP 4

Select the Passenger/Right Running Board. **NOTE:** The Passenger/Right Running Board will have a "**734R**" on the front. Carefully place Running Board on the brackets. **IMPORTANT:** Do not slide the Running Board front to back or damage to the finish may result. Attach Running Board to the (3) Mounting Brackets with (6) 8mm Combo Bolts, **(Fig 6)**. Do not tighten hardware.

FIG 6

Front

734R

(2) 8mm Combo Bolts
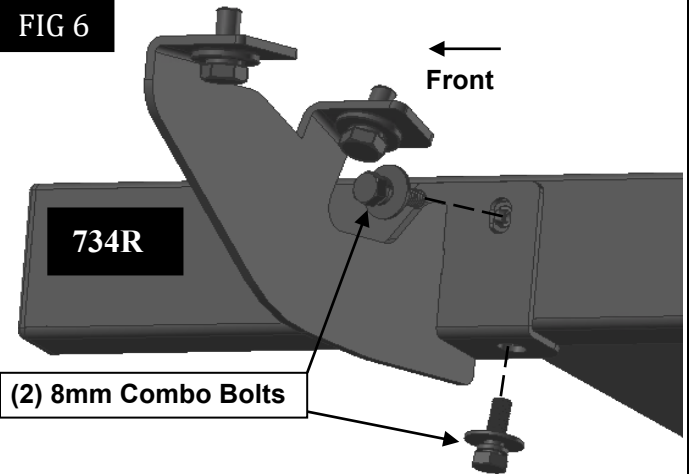
(Fig 6) Attach the Passenger/Right Running Board to the Mounting Brackets

STEP 5

Level and adjust the Running Board and fully tighten all hardware.

STEP 6

Repeat **Steps 1—5** to attach the Driver/Left Running Board.

STEP 7

Do periodic inspections to the installation to make sure that all hardware is secure and tight.

Attention

To protect your investment, do not use any type of polish or wax that may contain abrasives that could damage the finish.

Mild soap may be used also to clean the Running Boards.