

SKYJACKER

SUSPENSIONS

SKYJACKER.COM

2014> RAM 2500 4WD
2013> RAM 3500 4WD
Remote Reservoir Mount
Installation Instructions

Required Tools List:

- SAE Sockets \ Wrenches (5/16" & 1/2")
- Standard Screwdriver
- Power Drill
- Center Punch
- Safety Glasses
- Torque Wrench
- Drill Bit (1/8" & 5/16")
- Ball Peen Hammer
- Paint Marker



Before beginning installation, read these instructions completely. Please refer to Parts List to insure that all parts & hardware are received prior to disassembly of vehicle. If any parts are found to be missing, contact SKYJACKER® Customer Service at 318-388-0816 to obtain needed items. If you have any questions or reservations about installing this product, contact SKYJACKER® Technical Assistance at 318-388-0816.

Important Notes:

- One key to mounting properly is that reservoir hose makes a smooth loop and is not crimped, nor rubbing or chaffing any surface.

CAUTION: Make Sure ADX Shock Reservoir Hose Does Not & Will Not Make Contact with Anything Throughout the Full Travel Cycle of the Suspension. (Tire \ wheel, frame, sway bar, springs, brake lines, ABS lines, exhaust, etc.)

Hardware Box Breakdown:

Part # UN4RR

Item #	Description	Qty
UN4RR-D	REMOTE RESERVOIR BRKT, DR	1
UN4RR-P	REMOTE RESERVOIR BRKT, PA	1
HB-UN4RR	HDWR BAG: UN4RR	1

Hardware Bag Breakdown:

Part # HB-UN4RR

Item #	Description	Qty
HC40	HOSE CLAMP # 40	4
516X1FTB	5/16 X 1 FINE THREAD BOLT	4
516FTN	5/16 FINE THREAD N/I LOCK NUT	4
516SAEW	5/16 SAE WASHER	8

Note: Following sample installation is on a 2024 RAM 3500 4WD front mount application. (Photo # 1)

It will guide you through key steps of installation process.


Photo # 1





Installation:

1. Install Skyjacker ADX 2.0 shock into OEM mounting position.

Place Skyjacker remote reservoir into cradle of reservoir bracket. Hold Skyjacker bracket & reservoir together to find your desired position. (Photo # 1) **NOTE:** Some RAM models have an OEM welded-in brace on coil spring bucket near shock mount. If equipped, use OEM welded-in brace hole as a guide for Skyjacker bracket rearward mounting hole. (Photo # 2)

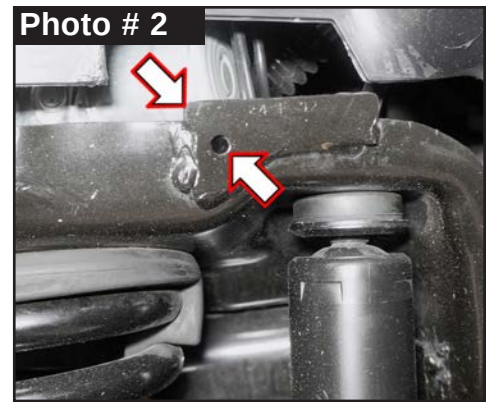

2. Use Skyjacker bracket as a guide to mark \ scribe two (2) mounting holes on OEM upper coil spring mount. (Photo # 3) Center punch marks with a punch. (Photo # 4)
3. Using your punched marks as a guide, first drill out punch marks using a 1/8" drill bit for a more precise pilot hole. (Photo # 5) **Note:** Prior to drilling, check behind surface area being worked on for any wires, brake lines, fuel lines, hoses, etc that could be damaged.

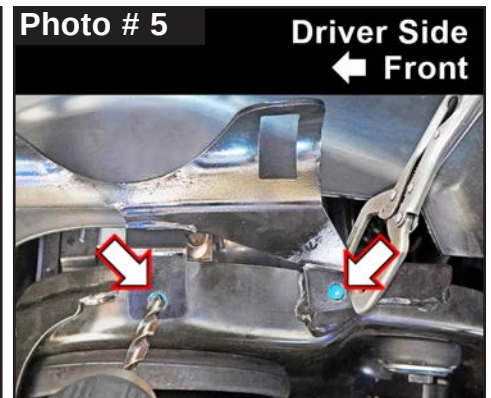
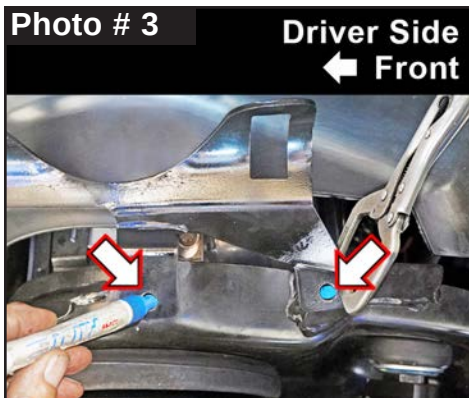


4. Drill out pilot holes using a 5/16" drill bit. (Photo # 6)
5. Attach bracket with a supplied 5/16" x 1" Fine Thread Bolt & 5/16" SAE Washer from outside-to-inside in each hole. Attach with 5/16" SAE Washer & 5/16" Fine Thread Lock Nut using a 1/2" socket \ wrench. (Photo # 7) Torque 240 in-lbs.
6. Place ADX remote reservoir into cradle of Skyjacker reservoir bracket.

Attach reservoir to bracket with supplied # 40 Hose Clamps. **Note:** Route each clamp through bracket cut-out & over top of bracket. Slide reservoir from side into each clamp. (Photo # 7)

Attach using a standard screwdriver or 5/16" socket \ wrench. (Photo # 8) Torque 180 in-lbs.

Tech Note: You can position or roll hose clamp rearward to hide bolts from view. Trim excess length of screw clamp strap using tin snips or similar tool.

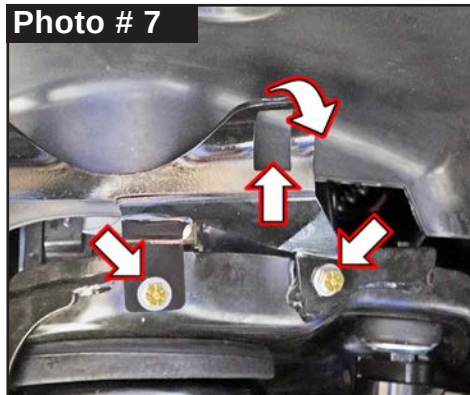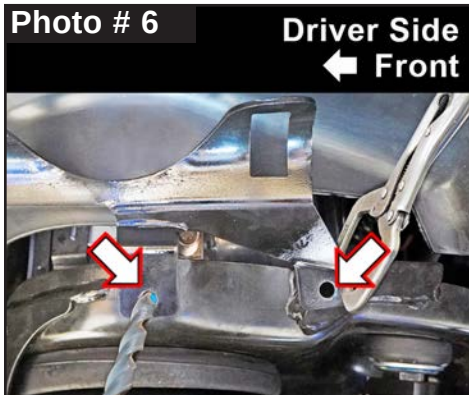

Final Notes:

- After installation is complete, double check that all nuts & bolts are tight.
- With vehicle placed on ground, cycle steering lock-to-lock & check all components for proper operation & clearances. Pay special attention to clearance between tires\wheels, ADX Shocks & Reservoirs, brake hoses, ABS wiring, etc.

TORQUE SPECIFICATIONS					
INCH SYSTEM			METRIC SYSTEM		
Bolt Size	Grade 5	Grade 8	Bolt Size	Class 8.8	Class 10.9
5/16	180 in-lbs	240 in-lbs	6MM	102 in-lbs	108 in-lbs
3/8	30 ft-lbs	35 ft-lbs	8MM	16 ft-lbs	23 ft-lbs
7/16	45 ft-lbs	60 ft-lbs	10MM	32 ft-lbs	45 ft-lbs
1/2	65 ft-lbs	90 ft-lbs	12MM	55 ft-lbs	75 ft-lbs
9/16	95 ft-lbs	130 ft-lbs	14MM	85 ft-lbs	120 ft-lbs
5/8	135 ft-lbs	175 ft-lbs	16MM	130 ft-lbs	165 ft-lbs
3/4	185 ft-lbs	280 ft-lbs	18MM	170 ft-lbs	240 ft-lbs
Above Specifications Are Not to Be Used When Bolt Is Being Installed With a Bushing.					

Seat Belts Save Lives, Please Wear Your Seat Belt.

SKYJACKER

SUSPENSIONS

SKYJACKER.COM

Check Out Our Favorite Ministries at:

- innministries.org
- familychurch.org
- kcm.org

Jesus Christ Died For You.

John 3:16

For God so loved the world that He gave His only Son, so that everyone who believes in Him should not perish, but have everlasting life.

Romans 3:23

For all have sinned; all fall short of God's glorious standard.

Ephesians 2:8

God saved you by his special favor when you believed. And you can't take credit for this; it is a gift from God.

Psalms 18:2

The Lord is my Rock, my fortress, and my savior; my God is my Rock, in whom I find protection. He is my shield, the strength of my salvation, and my stronghold.

Romans 10:9-10

That if you shall confess with thy mouth the Lord Jesus, and shall believe in your heart that God hath raised him from the dead, you shall be saved. For with the heart man believeth unto righteousness; and with the mouth confession is made unto salvation.

Pray This Simple Prayer:

God, I come to You admitting I have sinned against You and I need you to take control of my life. The Bible says anyone who calls on the name of the Lord will be saved.

I am calling on You, Jesus. I ask that You come live in my heart and be the Lord over my life today. I do believe You died on the cross for me and came back to life to give me life! Thank You, Lord Jesus for a new life in You! Amen.

Now, go and tell somebody about your new life in Jesus, get a Bible, begin to read it, and go to a Bible believing church.

If you would like someone to pray with you, call Kenneth Copeland Ministries anytime at 800-600-7395.

To listen to commercial free Christian radio on the web, go to www.887fm.org



**JESUS
FORGIVES
ROCKS
DON'T**

Jesús murió por ti.

Juan 3:16

Porque tanto amó Dios al mundo, que dio a su Hijo unigénito, para que todo el que cree en él no se pierda, sino que tenga vida eterna.

Romanos 3:23

Pues todos han pecado y están privados de la gloria de Dios.

Efesios 2:8

Porque por gracia ustedes han sido salvados mediante la fe; esto no procede de ustedes, sino que es el regalo de Dios.

Salmos 18:2

El Señor es mi roca, mi amparo, mi libertador; es mi Dios, el peñasco en que me refugio. Es mi escudo, el poder que me salva, ¡mi más alto escondite!

Romanos 10:9-10

Que si confiesas con tu boca que Jesús es el Señor, y crees en tu corazón que Dios lo levantó de entre los muertos, serás salvo. Porque con el corazón se cree para ser justificado, pero con la boca se confiesa para ser salvo.

Ahora dí esta simple oración:

Dios, vengo a Ti y admito que he pecado contra Ti, necesito que tomes el control de mi vida. La Biblia dice que todo aquel que invoca el nombre del Señor escapará con vida. En este momento yo clamo ante Ti, Jesús; te pido que vengas a vivir en mi corazón y que tomes el control de mi vida. ¡Yo creo que tu moriste en la cruz y resucitaste para darme vida! ¡Gracias Señor Jesús, por una nueva vida que tengo en Ti! Amén.

Ahora ve y dile a alguien sobre la nueva vida que tienes en Cristo. Compra una Biblia y empieza a leerla. Busca una Iglesia que cree en la Biblia y hazte parte de esa Iglesia.

Si te gustaría orar con alguien, puedes llamar a este número 800-600-7395

Puedes ir a este sitio de Internet para escuchar música Cristiana sin anuncios, www.887fm.org

