



**bajadesigns®**

THE SCIENTISTS OF LIGHTING

## **LIMITED LIFETIME WARRANTY**

Baja Designs proudly offers a LIFETIME WARRANTY against manufacturer's defect on all of the products that we manufacture.

These are comprehensive warranties; other than the exclusions below - you're covered. If your LED or HID bulb burns out, you're covered. Additionally, cutting off our connector or changing your lenses does not automatically void your warranty.

### **Exclusions:**

Installation errors, abuse, misuse or crash damage. You must be the original owner of the product and can supply proof of purchase.

Baja Designs manufactures its own products as well as resells products manufactured by others. Baja Designs makes no express or implied warranties on products not manufactured by Baja Designs including without limitation any warranties or merchantability and fitness for a particular purpose. We will however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties.

Baja Designs will pay the freight if your product is less than 90 days old, otherwise defective products must be returned to Baja Designs, Inc., freight prepaid. At our option, we will repair or replace items in question and return them at no charge. If the identical product is no longer available, we will replace with a similar product of equal value. Baja Designs Inc. will not be responsible for any indirect or consequential damages in connection with defective merchandise.

Items purchased through a Baja Designs authorized dealer must be returned through the dealer. Only available on LED auxiliary lights and product must be in sellable condition at MSRP. Product that has been damaged in any way after the original purchase date will be excluded from this guarantee

### **Indemnification:**

Buyer hereby acknowledges off-roading, racing and driving at night are dangerous activities and that the products and/or supplies purchased from Baja Designs are used in an inherently dangerous activity that may endanger life and limb; and in no event shall the seller, or seller's heirs and assigns, be held liable for consequential damages, nor shall seller's liability on any claim for damages arising out of or connected with the sale, delivery, or use of purchased products and/or supplies exceed the purchase price of the products and/or supplies.




2950 NORMAN STRASSE RD. PHONE 760-560-2252  
SAN MARCOS, CA 92069 FAX 760-560-0383

INFO@BAJADESIGNS.COM  
WWW.BAJADESIGNS.COM




## XL MOUNTING / WIRING

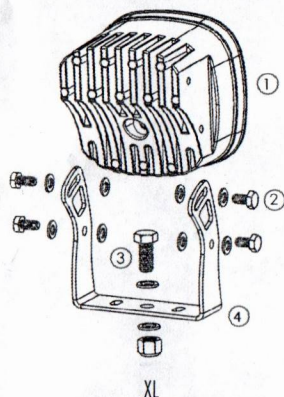


- ① XL
- ② 1/4"-20 x 1/2"
- ③ 3/8"-16 x 7/8"
- ④ XL Bracket

- 1** Begin by removing the light and bracket from the box and orient them as shown in the picture.
- 2** Place the center 3/8"-16 x 7/8" hex head bolt through the bottom of the bracket with associated washers and nuts shown in the picture. Do not fully tighten the lower mounting bracket hardware until the light has been aligned.
- 3** Mount the bracket to the light using the remaining 1/4"-20 x 1/2" hardware and associated washers, as shown in the picture.

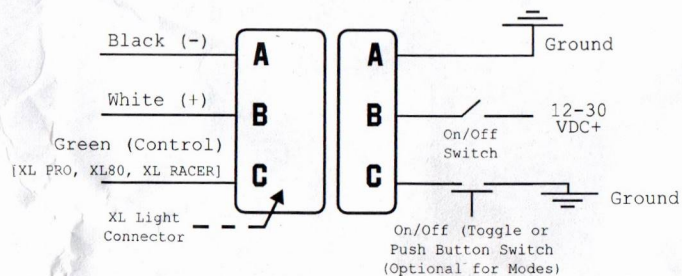

As with any electrical accessory, Baja Designs lights must have circuit protection (fuse or circuit breaker)


## XL DIMENSIONS AND SPECIFICATIONS

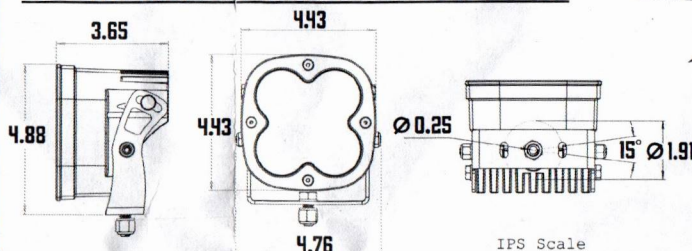

- Exceeds MIL-STD810G (Mil-Spec Testing)
- Weight: 2.45 lbs (~1.11 kg)
- IP69K (Waterproof up to 9ft. & Pressure Washable)
- IK10 Compliant (Mechanical Impact Testing)


## THE SCIENTISTS OF LIGHTING

### VEHICLE LIGHTING ZONES

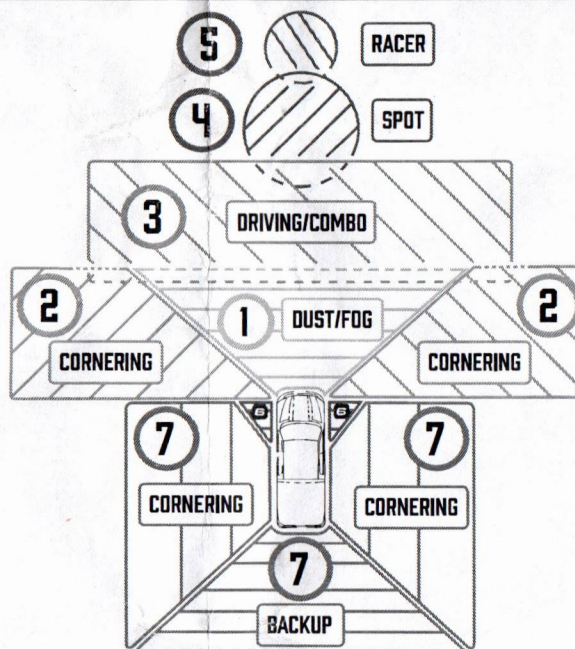

©2014-2019 Baja Designs - Copyright Registration Number: TX0007930854

### MOTORCYCLE LIGHTING ZONES

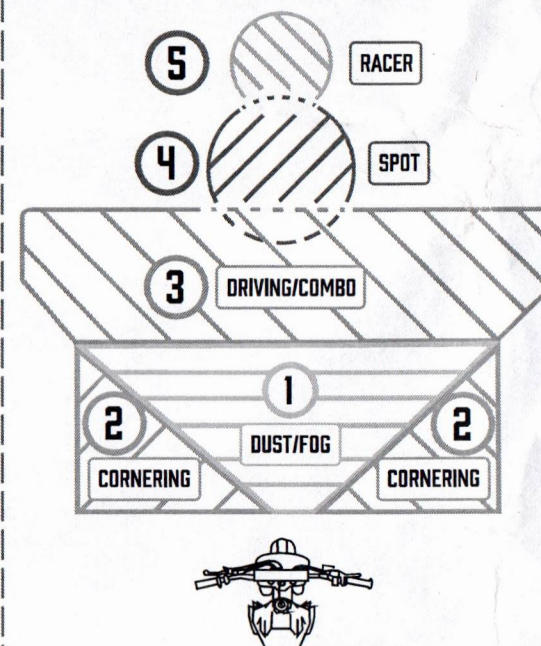

©2014-2019 Baja Designs - Copyright Registration Number: TX0007930854

## LENS SWAP INSTRUCTIONS



- When installing a different lens, simply remove the 4 (Squadron or S2) bolts using a 2.5mm allen wrench from the bezel.
- Carefully remove the front bezel and lens.
- Make sure the o-ring is properly fitted in the o-ring groove of the housing when installing the new lens. The o-ring is not directional, although the shape has been designed to match the housing profile groove.
- Once you have ensured the o-ring, lens, and bezel has been properly seated, begin tightening the 4 (Squadron or S2) bolts. The bezel hardware should be torqued to 25in./lb in a "criss-cross" pattern.