

LED FOG LIGHTS WITH DRL

(2013-2018 1500)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Fog Light
- (1) RH Fog Light
- (2) Wire Leads
- (2) Scotchlok Connectors

TOOLS REQUIRED


10mm Socket Ratchet Pliers





STEP 1

From behind the front bumper, unplug the fog light electrical connector.

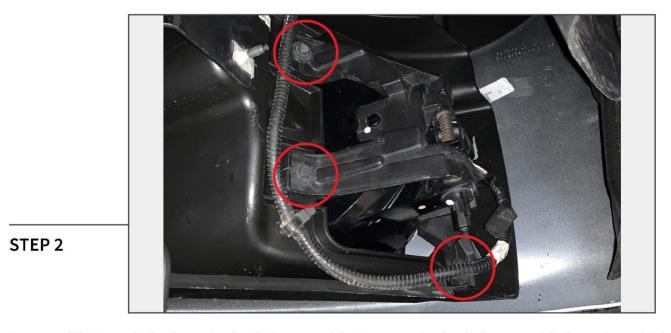

Remove (3) 10mm bolts from the fog light assembly. Remove the fog light assembly from the vehicle.





STEP 3

Install the new fog light assembly to the vehicle bumper using the original (3) 10mm bolts. Plug the fog light harness into the vehicle wiring harness.



STEP 4

Route the fog light wire lead towards the vehicle headlight assembly. Locate the parking light connector on the headlight, and splice the fog light wire lead to the parking light.

LH Side Parking Light Wire: White/Brown (+) RH Side Parking Light Wire: White/Red (+)

Installation is now complete.