

LED TAIL LIGHTS

(2019-2024 1500)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (1) Dielectric Grease Packet

TOOLS REQUIRED

- T-25 Torx Socket/Bit
- Ratchet
- Panel Removal Tool


STEP 1

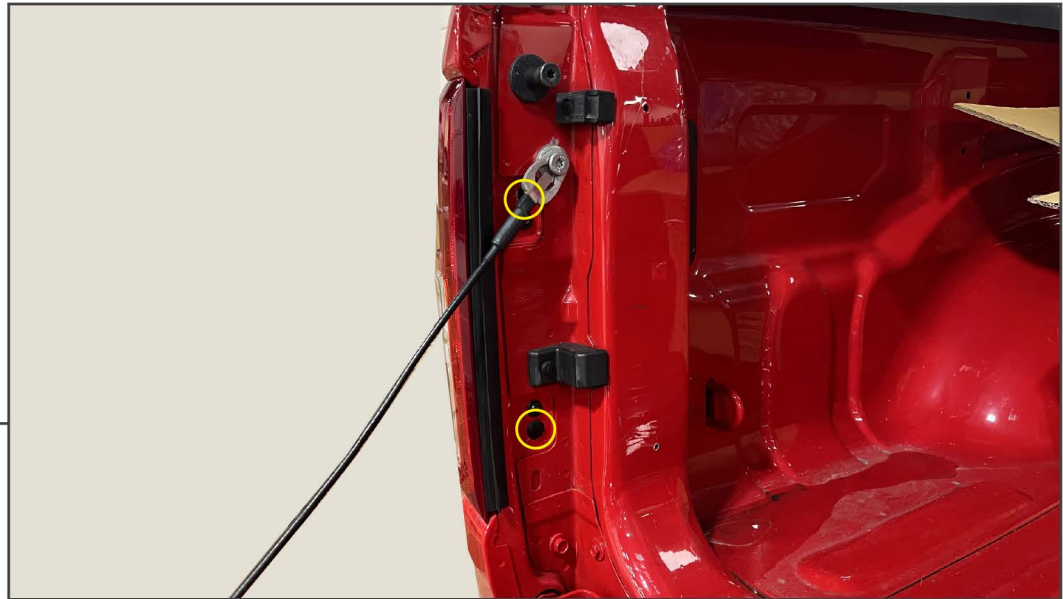

Lower the vehicle tailgate. Remove (2) plastic push clips from the side of the vehicle tail light.

Note: Removing the tailgate strap may be necessary. If removing, work on one side of the vehicle at a time to ensure the tailgate remains in place.

STEP 2

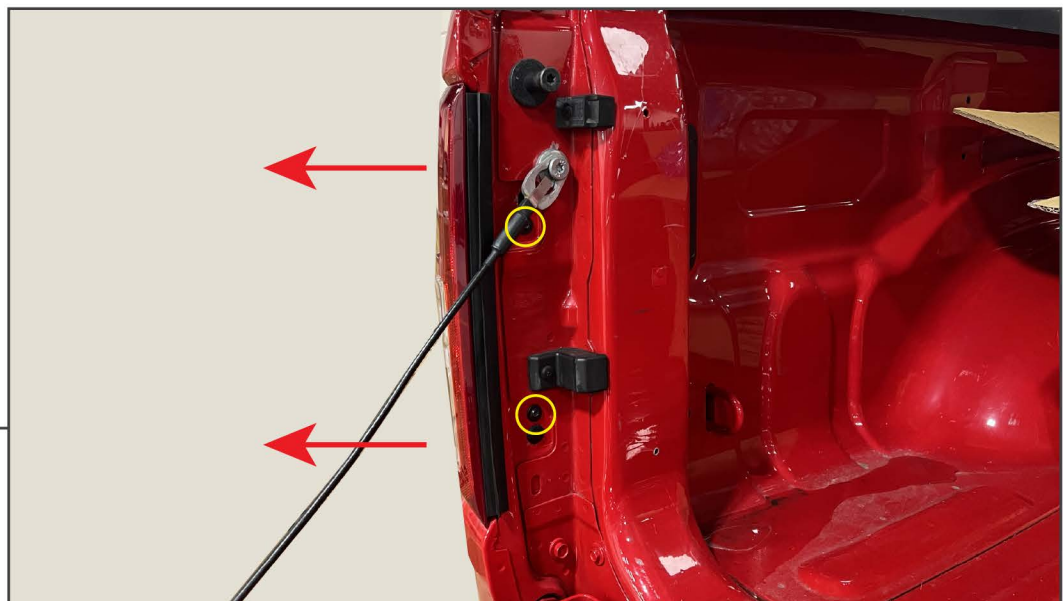


Remove (2) T-25 Torx screws from the side of the tail light. Pull the tail light firmly away from the vehicle to dislodge the (2) alignment pins inside the bed.



STEP 3

Slide the red connector lock back on the connector. Then, press the connector tab and unplug the vehicle electrical connector from the tail light harness.

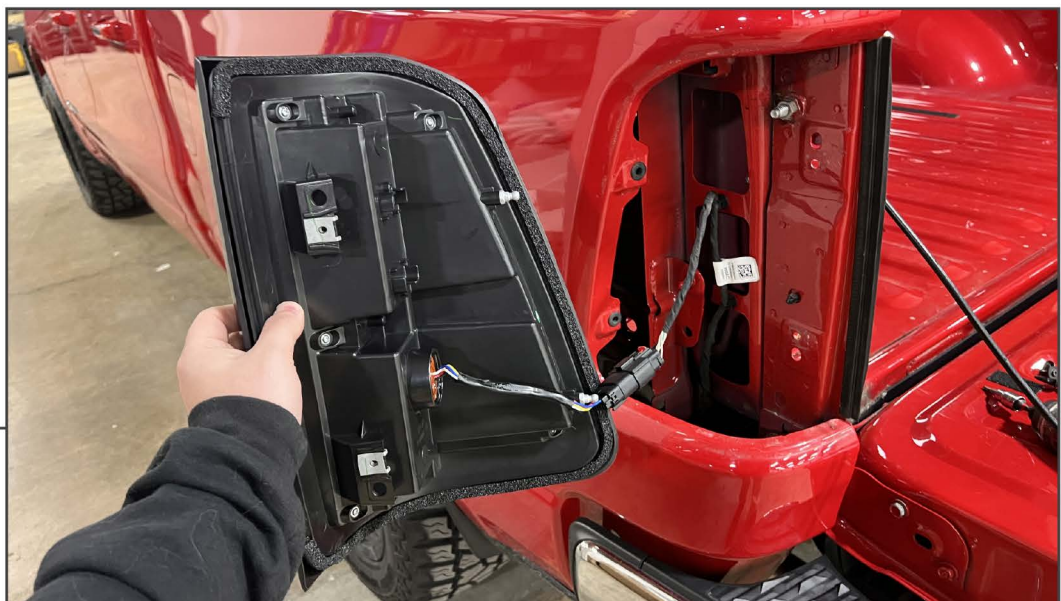

STEP 4

Plug the new tail light harness into the vehicle wiring harness, then slide the red connector lock to secure the connection.

STEP 5



Align the (2) tail light alignment pins into the vehicle grommets. Then, secure the tail light to the vehicle bed using the original (2) T-25 Torx screws and (2) plastic push clips.

STEP 6



Repeat steps 1-5 for the remaining tail light.

Installation is now complete.