

IMPORTANT: PLEASE KEEP THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE !

Copyright © 2019 by E&G Corporation, LLC. All right reserved. The reproduction or utilization of this work in any form or any electronic, mechanical, or other means, no known or hereafter invented, including xerography, photocopying, and recording, and in any information storage retrieval system is forbidden without written permission of owners.



2019-20 Chevrolet Silverado / GMC Sierra Console Safe

Will not fit HD models

Part #7022-1000-19

MADE IN



AMERICA

BY AMERICAN WORKERS WITH
EXPERT QUALITY CRAFTSMANSHIP




TOOLS REQUIRED

10mm socket and ratchet.


10/19/2020

Notes to the Technician/Installer:


E&G is proud to present this package to you and reminds you that for technical information, contact technical assistance at 410-381-4900. Do not attempt the installation of any E&G product without first reading the detailed instructions. E&G will not warrant damaged parts or the vehicle due to altered installation procedures.

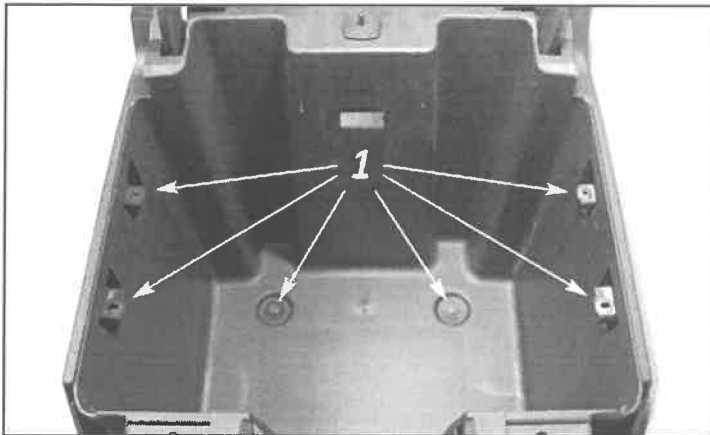


1. Cover the seats with a protective cover prior to beginning the console safe installation. Open the center console lid, empty the console and remove the factory liner (if equipped). Remove the two factory 10mm hex bolts from the bottom of the console. Remove the factory hardware retaining the side rails from the console and remove the side rails (not shown).

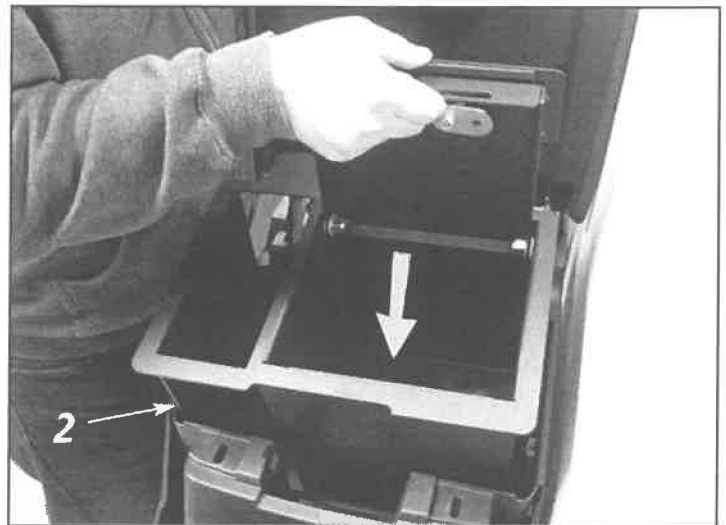


2. Carefully position the console safe into the factory console well, making sure you do not scrape the sides of the factory console.

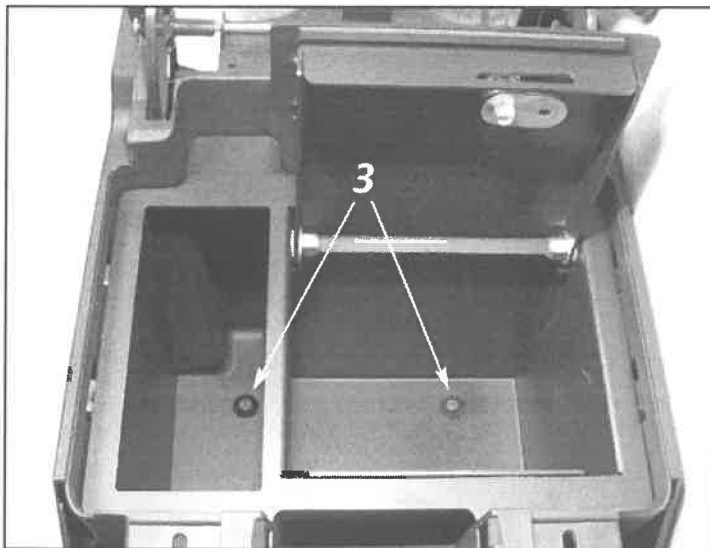


3. Make sure the console safe is seated in the console well with the sides flush and square in the corners. Reinstall the factory bolts to secure the console to the vehicle.

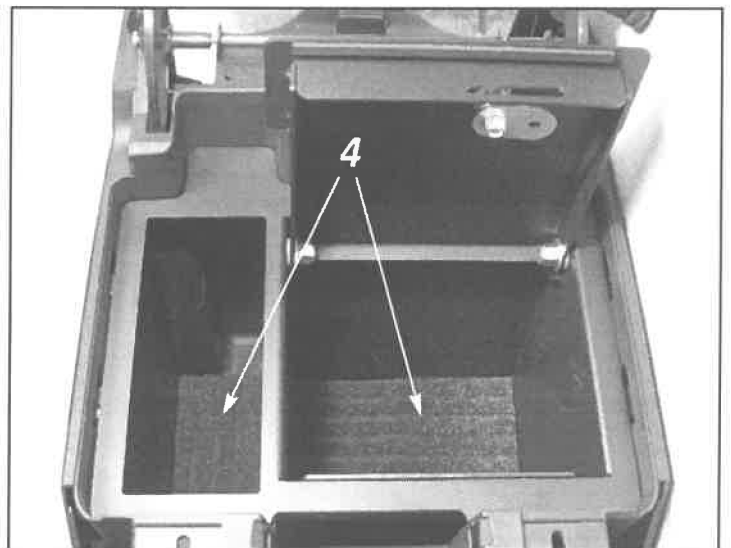

4. Install the supplied carpet inserts into the bottom of the console well and the console safe (prototype inserts shown, production inserts may differ).

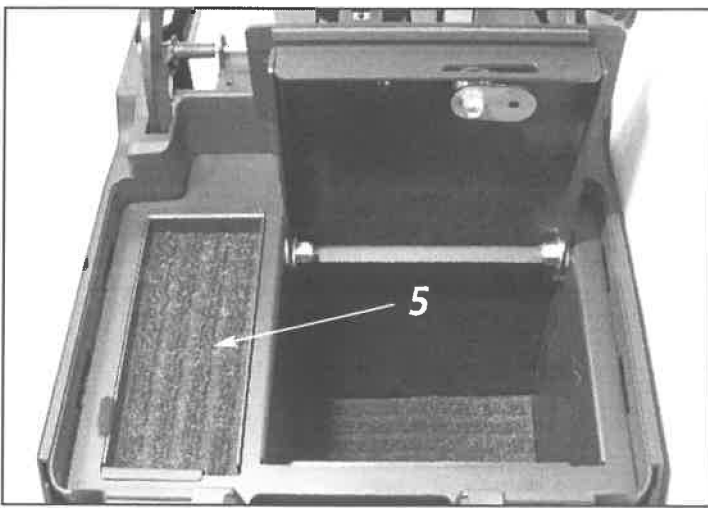

5. Align the supplied console safe tray and carpet insert into the upper opening in the console safe (prototype insert shown, production insert may differ).

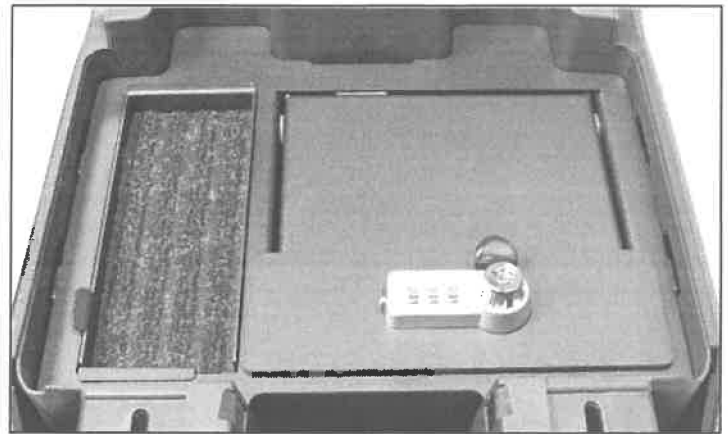

6. Finished installation. **For the vehicle owner:** Follow the supplied detailed instructions (inside the small plastic bag with the key) and choose your lock combination. There is a spare copy of the lock combination instructions below.

E&G Warranty Information:

E&G Corporation, LLC. warrants its parts and products to be free from defects in material, workmanship or finish for Thirty-Six (36) months from the date of shipment by E&G. This warranty is limited to the repair or replacement, at E&G's option, of the defective part or product. Full E&G warranty information is available online @ www.egclassics.com. Just click on the product warrantv icon.


For E&G Product Returns:

Please contact the authorized E&G Dealer where you purchased our product from in regards to any workmanship or warranty claims. All items returned to E&G must have a return authorization number issued by us for inspection or a defective product and or warranty issue. All merchandise sent back to E&G without proper paperwork or authorization will be rejected and returned.

Part #7022-100C-19

Quantity:	Description:	Part Number:
1	Console Safe Complete	7022-1100-19
1	Console Tray	7022-1070-19
1	Installation Hardware Kit	7022-1902-19
1	Console Safe Carpet Insert	7022-0121-19
1	Console Safe Well Carpet Insert	7022-0122-19
1	Console Safe Tray Carpet Insert	7022-0123-19

MADE IN



AMERICA



E&G CLASSICS


www.egclassics.com

Congratulations on your purchase of an E&G Console Safe.

Setting your own combination:

NOTE: The opening combination code is preset to 0-0-0

1. Combination must be set to the current opening combination code prior to resetting.
2. Set knob to the locked position.
3. The code reset button is located on the side of the lock. Press and hold the reset button.
4. Set your personal combination by turning the number dials to the desired combination.
5. Release the reset button and the new opening combination code is set.
6. To lock, rotate one or more number dials after the locking knob is turned to the locked position.
7. To open the lock, turn the number dials to your personal combination.

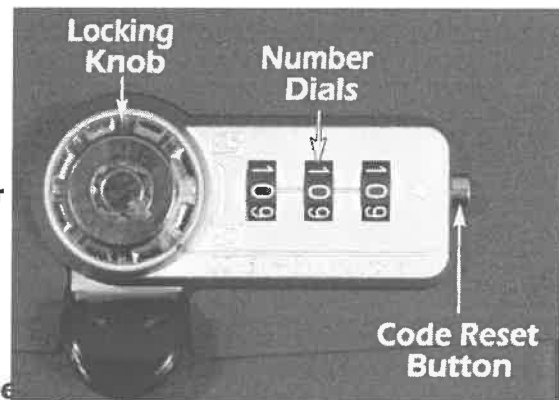

Discovering an unknown combination using the

1. Insert the key and turn it counter clockwise to unlock the safe.
IMPORTANT: The knob will remain in the locked position.
2. With the key in the unlocked position, turn each number dial until they stop.
3. Once all the number dials have stopped, the current opening combination code has been discovered and can now be reset.