



---

# NEOPRENE FRONT SEAT COVERS

(2019+ SILVERADO)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) LH Front Backrest Cover
- (1) RH Front Backrest Cover
- (1) LH Seat Case Cover
- (1) RH Seat Base Cover
- (1) LH Front Headrest Cover
- (1) RH Front Headrest Cover
- (1) Center Console Armrest Cover
- (1) Front Jump Seat Backrest Cover
- (1) Front Jump Seat Base Cover
- (1) Center Arm Rest Cover

### TOOLS REQUIRED

---


N/A

**STEP 1  
(FRONT SEATS)**



Remove the headrest from the front seat by pressing the (2) buttons at the base of the headrest. Set headrest aside.

**STEP 2**

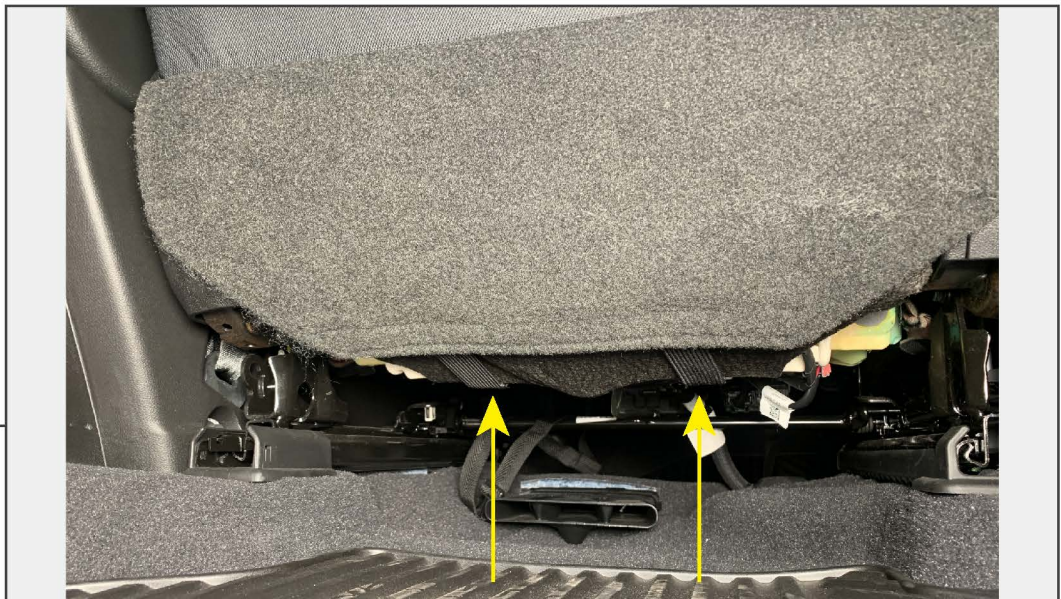

Under the front seat, unclip the (2) straps on the lower kick panel.




**STEP 3**



Lay the front seat cover base onto the seat, and route the (2) strap buckles in between the seat base and backrest.

**STEP 4**

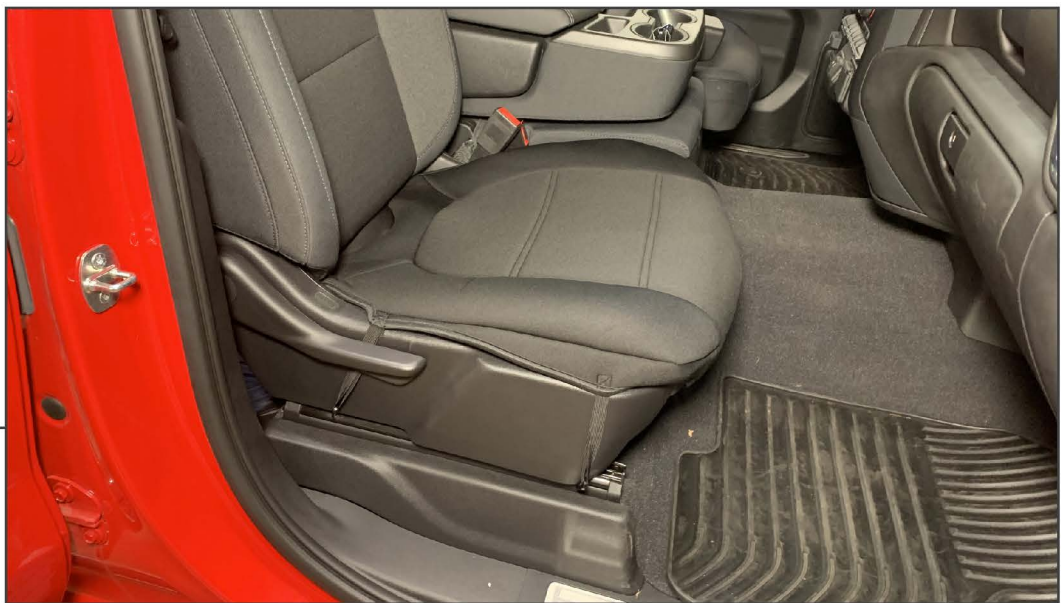


Meet the (2) strap buckles to the front strap connector. Connect the (4) elastic straps to the sides of the seat to secure into place. Make final adjustments, then tighten the (2) lower straps.



**STEP 5**

Place the front seat backrest onto the front seat. Route the attached straps between the seat backrest and seat base. Pull the seat cover downwards, and tuck the headrest base holes in the cover under the headrest base.

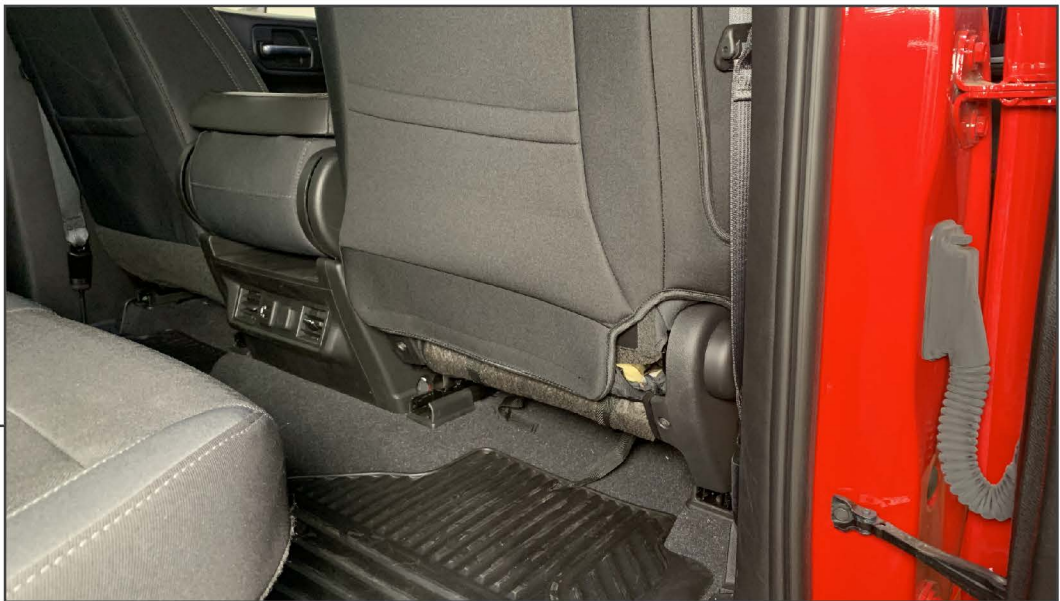

**STEP 6**

Fold the kick panel attached to the seat behind the seat cover, then connect the seat cover straps together. Make final adjustments, then tighten the (2) lower straps.



**STEP 7**



Install the headrest cover onto the vehicle headrest. Tuck the headrest cover under the tilt button.

Repeat steps 1-7 to the remaining front seat cover.

**STEP 8  
(CENTER JUMP  
SEAT/CONSOLE)**



Lift the jump seat into the upright position. Drape the cover around the backrest, and secure into place using the (2) attached Velcro straps and (2) elastic bands.



**STEP 9**

Secure the jump seat base cover using the (2) attached buckle straps and (4) elastic straps. Make final adjustments, and tighten the (2) buckle straps.

Note: Feed the male end of the buckle through the hinging portion of the seat towards the top of the seat. Connect the male and female of the buckle, then pull the strap to relocate the buckle assembly below the seat base.



**STEP 10**

Secure the center console armrest cover using the (4) Velcro straps. Make final adjustments, and tighten the Velcro to secure into place,



---

**STEP 11**

Installation is now complete.