

LED HALO SURROUND HEADLIGHTS

(2007-2013 SILVERADO)


INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Headlight Assembly
(1) RH Headlight Assembly


TOOLS REQUIRED

10mm Socket
Ratchet
Panel Removal Tool

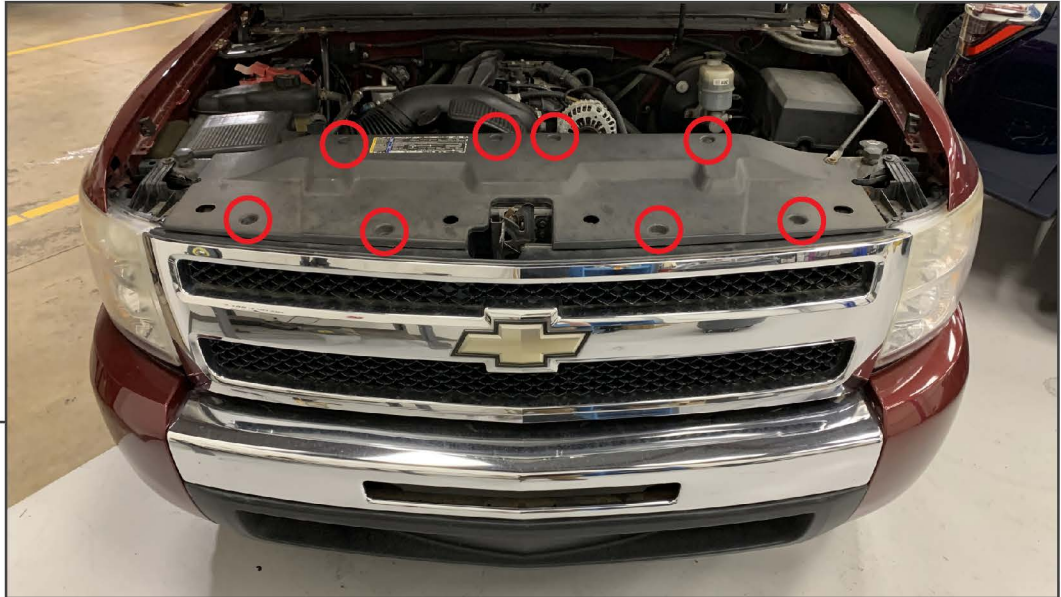

STEP 1

Remove (8) plastic push clips from the upper radiator cover. Remove the cover and set aside.

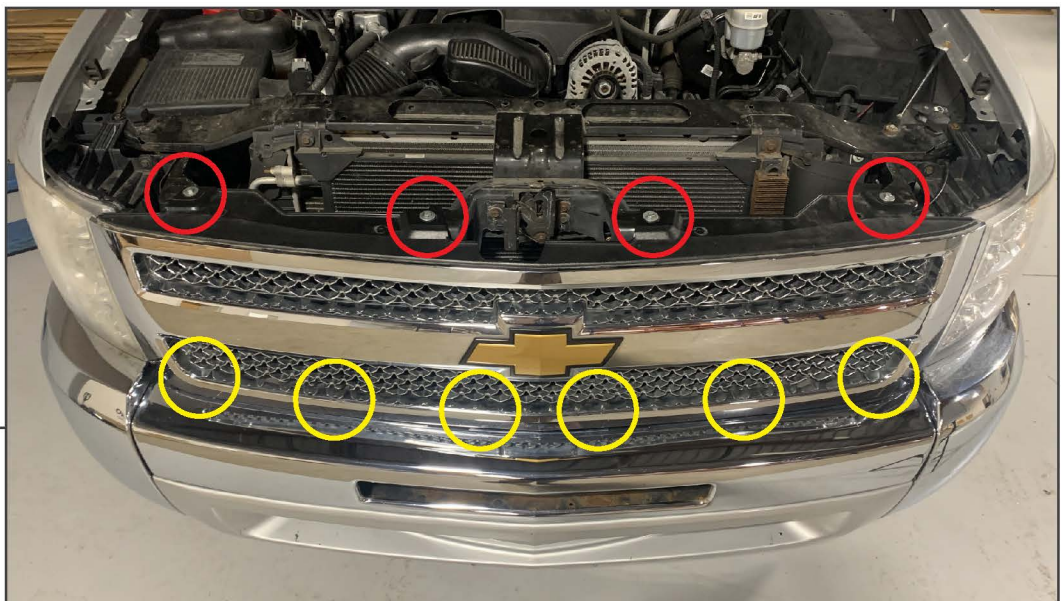

STEP 2

Remove (4) 10mm bolts from the top of the grille assembly. Then, gently pull the grille away from the vehicle.


Note: Using a flathead screwdriver to pry the mounting tabs of the grille away from the vehicle core support may be necessary.



STEP 3

Remove (2) 10mm bolts from the top of the headlight assembly. Loosen (1) 10mm bolt from the side of the headlight in between the headlight and the bumper.

Pull the headlight assembly away from the vehicle and unplug the (1) electrical connector. Remove the headlight from the vehicle.

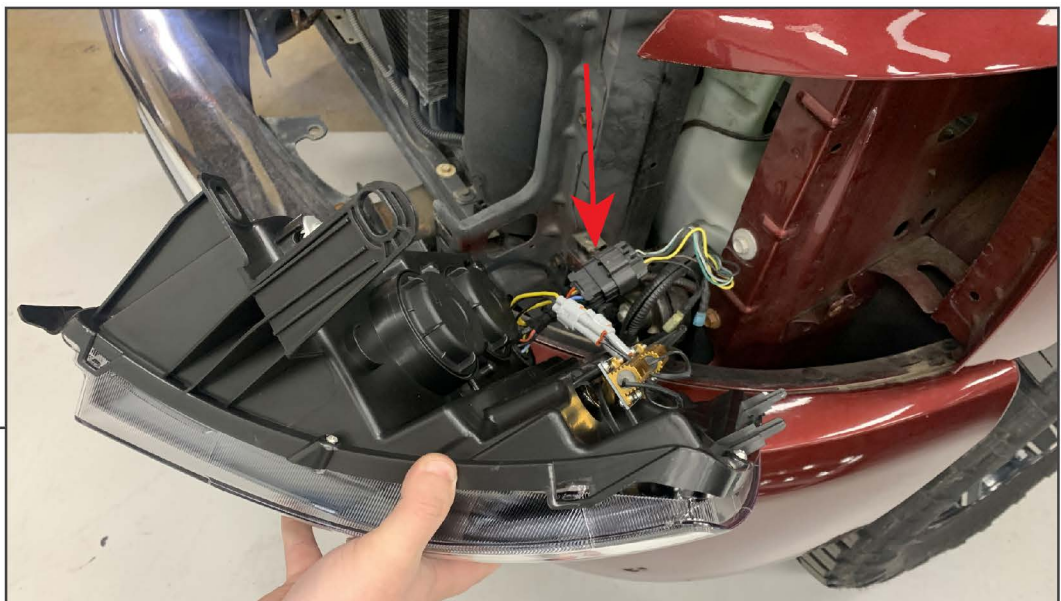

STEP 4

Plug the new headlight assembly into the vehicle wiring harness, ensure the wiring harness audibly clicks into place.



STEP 5

Secure the new headlight into the vehicle reusing the original (3) 10mm bolts, tighten until secure. Repeat steps 1-5 to install the remaining headlight assembly, then re-install the vehicle grille and upper radiator cover reusing the original hardware.

Installation is now complete.