

Installation Instructions

I - Sheet Number INS-HSBF68 Rev.C



Hood Shield

**For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.**

Important Safety Information



- CAUTION - Before driving, ensure that the hood shield is properly anchored to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

Contents **NOTE:** Actual product may vary from illustration.



Hood shield



Screw x3



Well Nut x3



Bump On x4




Alcohol Pad x1


Tools Required



Car Wash Supplies



Clean Towel




Phillips screw-
driver

Preparation Before Painting / Installation

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.


Installation Steps **NOTE:** Actual application may vary slightly from illustrations.

Raise hood.

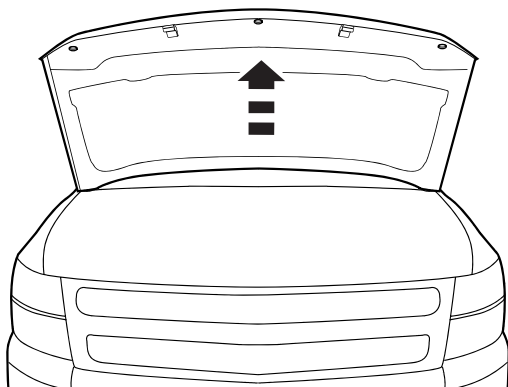

1

Locate (3) circular holes on the underside of hood. Clean the area around these with a soft cloth.

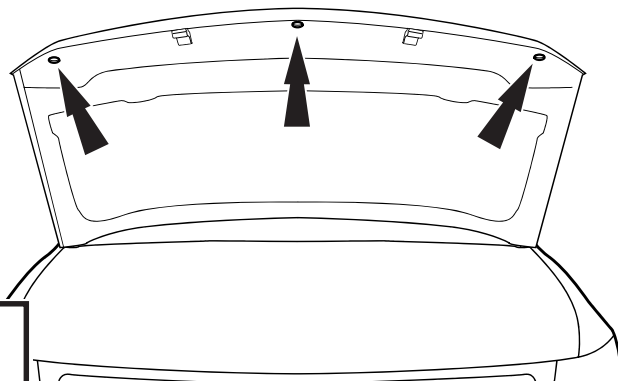

2

Installation Steps

NOTE: Actual application may vary slightly from illustrations.

Alcohol Pad

Locate (2) rubber bumpers on the underside of hood.
Clean the area around these with an alcohol pad.

rubber bumper

Alcohol Pad

Alcohol Pad


3



Attach fasteners to hoodshield by inserting screw through hood shield, and into well nut. **Partially** thread screw into well nut.


Well nut

Hood shield



4


Peel back 2" (5 cm) of tape liner off both tape strips to expose adhesive. Fold free ends over so they will be accessible.

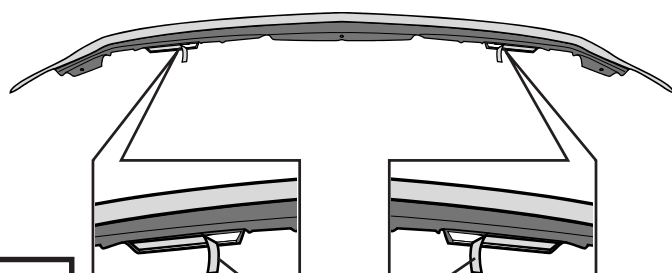

Free Ends


5

Center part on front edge of hood and align holes.

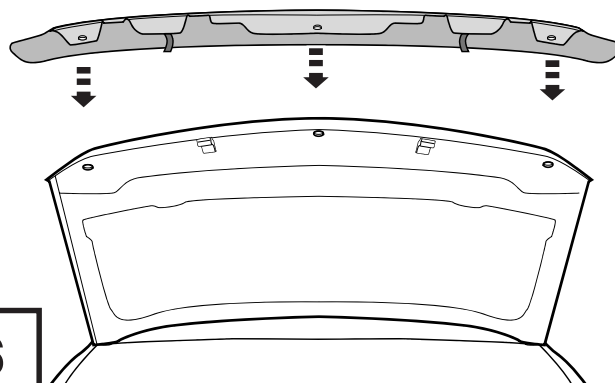

6

NOTE: Observe the alignment from the side view in order to guide the hood shield with its attached fastener into the proper hole in the hood.

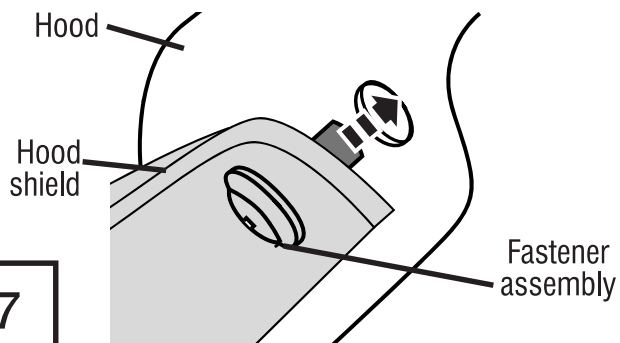


Hood


Hood shield

Fastener assembly

7




With the fastener assembly inserted into hole in hood, secure hood shield to hood by tightening screw to expand well nut. Repeat for remaining fasteners.



8


NOTE: DO NOT OVER TIGHTEN

Remove remaining tape liner by pulling on free ends, and apply pressure to adhere tape.

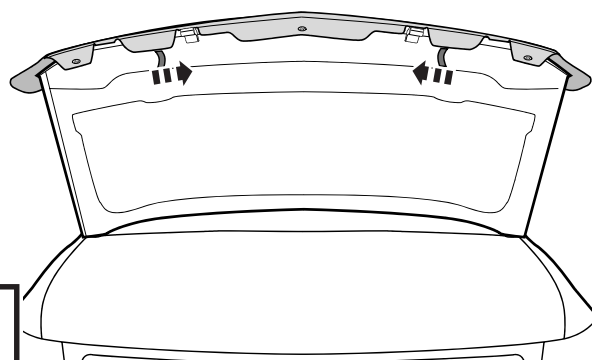

9

Close Hood.

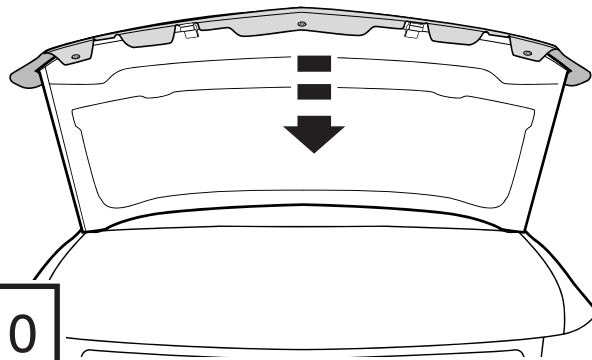


10

Installation Steps

NOTE: Actual application may vary slightly from illustrations.



Apply bump ons to surface of hood.

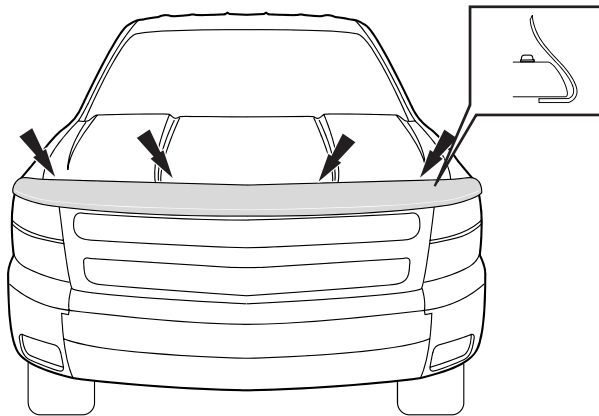

11

Care and Cleaning

- Wash only with mild soap & dry with a clean cloth.



The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.



Congratulations!

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



1-800-344-8759 • Visit us at huskyliners.com

© 2024 Husky Liners, Inc. All rights reserved.

Husky® and the Husky® logo are trademarks of Husky Liners, Inc.