



Installation Guide

Front Armor Grille
W/ Emblem Base & Amber Lights
For 2022-2024 Silverado 1500
SKU # AMCHCA00141

STEP 1




Open the hood to access the front end and locate the plastic shield over the grille area. Use a trim tool or flathead screwdriver to carefully remove the plastic push pins, making sure not to break them off. Once all the push pins are removed, remove the two T15 torque screws in the center and finally remove the plastic shield.

STEP 2




Identify the bolts holding the grill in place. There are 4 screws related to the body panel above the bumper. Use a socket wrench to remove the top bolts, typically 10 mm, located right above the grill, attaching it to the radiator support beam.

STEP 3

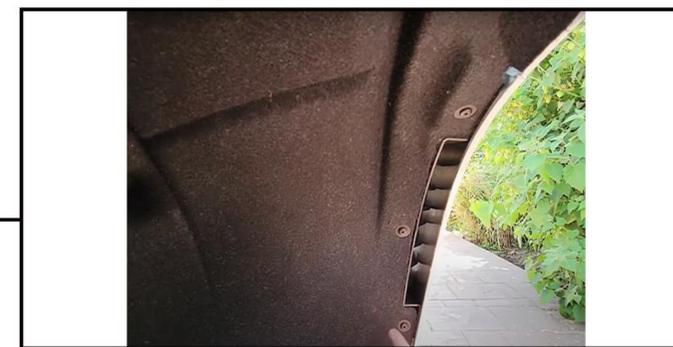

Remove the 4 torx bolts that are holding the under fender material. (3 on the edge + 1 on the top)

STEP 4

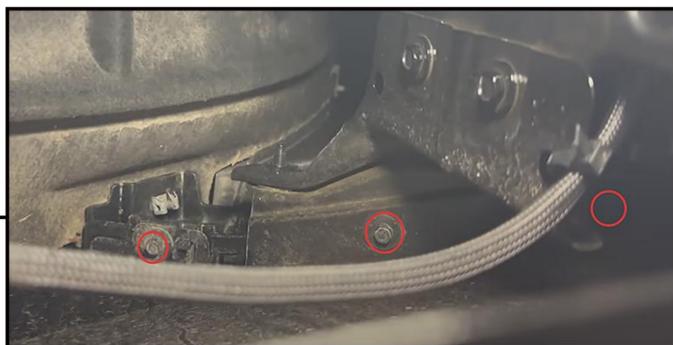

Find the 3 marked bolts and loosen them.

STEP 5



Use the panel removal tool to pull it out.

STEP 6




Repeat steps 3, 4 and 5 on the other side.

STEP 7



Remove the three 10mm screws on the bottom of the factory grille. Pop the plastic piece above the headlight on either side of the grille out. This will allow you to take the grille out.

STEP 8

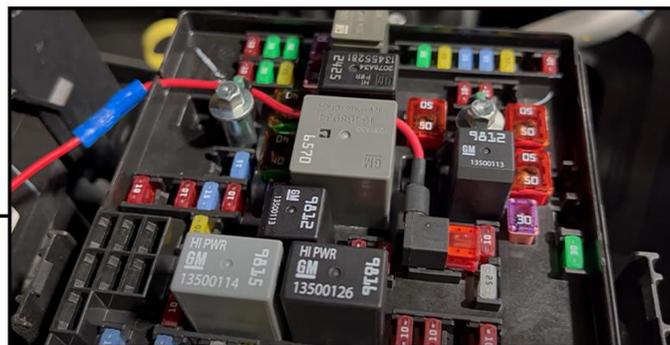

Use fuse tap to connect red wire to acc. Then Connect black wire to negative. Start the vehicle and see if the light comes on.

STEP 9



Once the wiring work is complete, fit the original badge to the grille and complete the final installation by following the previous steps in reverse order.