



**PART# 221903 (Single Strut)**  
**371903 (Pair of Struts)**

**2019+ GM 1500 2WD/4WD**  
**2021+ GM SUV 2WD/4WD**  
**(DOES NOT FIT ACTIVE-RIDE,**  
**MAGNE-RIDE, OR AIR-RIDE MODELS)**

**0-3" FRONT LOWERING STRUTS**



Components
(2) LOWERING STRUT
(2) LOWER COIL SEAT
(2) SNAP RING
(2) SNAP RING RETAINER
(2) M14-2.0 NYLOCK NUT



3 HOUR INSTALL TIME



Recommended Tire size  
 31x10.50

HARDWARE LISTED IS  
 FOR A PAIR OF STRUTS



**WARNING**

\*THESE TRUCKS WILL NOT HAVE THE ABILITY TO ALIGN TO FACTORY SPECS WHEN SET AT 2" OF DROP OR MORE. AFTER MARKET CAMS OR CONTROL ARMS WILL BE NEEDED.

\*SETTING STRUTS AT A 3 DROP MAY CAUSE FOR A STIFF RIDE QUALITY.

\*DOES NOT WORK WITH MAGNE-RIDE/ ADAPTIVE RIDE. MODELS WITH RIDE HEIGHT SENSORS ON THE SUSPENSION

\*STRUT GROOVES ARE DESIGNED FOR DROP AS A STAND ALONE COMPONENT. IF INSTALLING 2" DROP SPINDLES TOO, THEN THE STRUT SHOULD BE SET TO 1" OR 2" DROP FOR A TOTAL OF 3" OR 4" OF DROP

Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged

**PRIOR TO INSTALLATION:**

1. Factory service manual is recommended to have on hand.
2. Secure and properly block vehicle prior to beginning installation.
3. Always wear safety glasses when using power tools or working under the vehicle
- 4 Modification to any part will void the warranty associated with that product

AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION

REVISED 3/7/2025

4522 E Eisenhower Cir Anaheim, CA 92807 (844) 535-1668 Email: Techsupport@Maxtracsuspension.com

MAXTRACSUSPENSION.COM



**Step 1** Jack up the front of your vehicle and support under the frame with jack stands.



**Step 2** Unbolt the two mounting bolts at the bottom of the strut along with the three nuts at the top of the strut.




**Step 3** Unbolt both of the bolts attaching the lower control arm cross brace to the lower control arm and remove. Next, remove the strut assembly through the opening in the lower control arm.



**Step 4** Using an automotive coil/strut compressor, compress the coil so that the strut can be disassembled safely and then remove the nut at the center of the strut top. **NOTE: TAKE NOTE OF THE RELATIONSHIP BETWEEN THE STRUT TOP AND THE STRUT BOTTOM FOR PROPER CLOCKING DURING INSTALLATION.**



**Step 5** Once the nut is removed, remove the strut out from the bottom of the coil and then remove the bump stop.

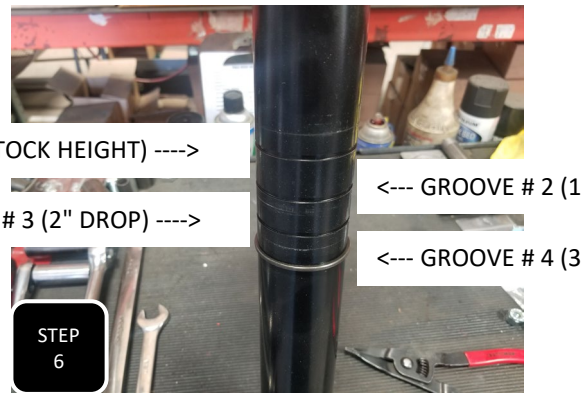

GROOVE # 1 (STOCK HEIGHT) ---->

GROOVE # 3 (2" DROP) ---->


<--- GROOVE # 2 (1" DROP)

<--- GROOVE # 4 (3" DROP)

**Step 6** Locate your new struts and set the ring to the proper groove according to the picture above. Make sure the snap ring fully engages into the groove.



**Step 7** Slide the snap ring retainer over the snap ring. If the retainer does not slide over the ring, then tap the ring with a hammer to fully seat it and then install the retainer. **NOTE: THE RETAINER MUST GO COMPLETELY OVER THE SNAP RING AND SEAT OR YOUR SUSPENSION COULD FAIL.**

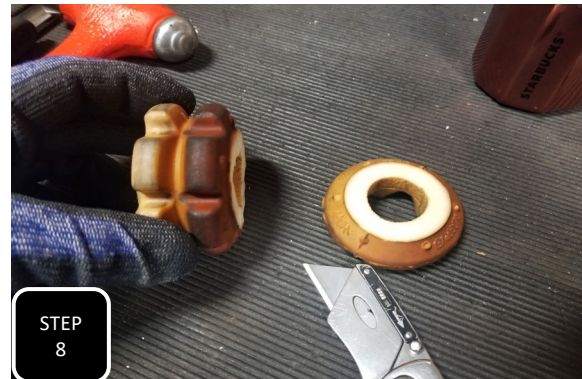

**Step 8** Locate the factory bump stop and cut one rib off of the end of it.



**Step 9** Slide the new coil seat onto the strut, then install the strut up through the bottom of the coil. **NOTE: MAKE SURE TO INSTALL THE BUMP STOP UP INTO THE CUP ON THE BOTTOM OF THE STRUT TOP BEFORE INSTALLING THE STRUT.**



**Step 10** Re-install the strut top and tighten down using the provided M14 nylock nut. **NOTE: MAKE SURE TO PROPERLY CLOCK THE STRUT TOP WITH THE BOTTOM OF THE STRUT.**

**Step 11** Reverse steps 2 and 3 for re-installation.

## **AFTER MODIFYING YOUR SUSPENSION**

**HAVE THE VEHICLE'S ALIGNMENT CHECKED**

**PROPERLY ADJUST YOUR HEAD LIGHTS FOR THE NEW STANCE OF THE SUSPENSION**

**RE-TORQUE ALL BOLTS AFTER 500 MILES**



**MaxTrac**  
s u s p e n s i o n

## RIDE HEIGHT SHEET

\*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR \_\_\_\_\_ MAKE \_\_\_\_\_ MODEL \_\_\_\_\_

4WD / 2WD / AWD

### MEASUREMENTS

\*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

\*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

\*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

# LIMITED LIFETIME WARRANTY

Max Trac Suspension does not warrant, express or implied, as to the reliability, fitness for purpose, description, quality, productivity, accuracy or any other attribute of the product, all such warranties being hereby specifically and expressly disclaimed by Max Trac. Max Trac does not offer technical advice or assistance regarding the products used on the motor and/or vehicle. Max Trac does not represent or agree that its website represents only good faith opinions and does not constitute a warranty or guarantee. The sole and express warranty provided by Max Trac is the warranty that the products sold as listed on the Max Trac website at the time of purchase are free of manufacturing defects. Max Trac does not warrant that the products will perform as specified after installation of the products. Use of the product is specifically not warranted, and Max Trac specifically excludes from its express warranty parts subject to normal wear and tear after one year, finish after one year, damage resulting from failure to follow recommendations in installation manuals, or operation or off-road use, and damages caused after the product is used. Max Trac shall not be liable for any damage or loss of property for an accident or liability if the product is used to repair, replace, or refund at Max Trac's option and in Max Trac's sole discretion. There are no warranties in the event of a description on the website.

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

## **WARRANTY RETURN**

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA#).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

## **NON-WARRANTY RETURN CREDIT POLICY**

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA#).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

## **Return Options**

Merchandise that has been installed, used, or altered may be subject to no credit.

## **Restocking Fee**

All items are subject to a restocking fee based on the condition of the packaging and product.

Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt.

All returns will be credited to your Maxtrac account.



# INSTALLATION WARNINGS

**READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.**

**MA TRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.**

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

**MA TRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES**

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

## **Final Checks Adjustments**

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and ABS lines for adequate slack at full extension, and adjust as necessary.



# ADDITIONAL WARNINGS

## **WARNING**

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A Factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

**FAILURE TO PERFORM POST INSTALLATION INSPECTION AND/OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND/OR PERSONAL INJURY OR DEATH.**

**RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THERAFTER.**

## **Vehicle Handling Warning**

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

## **Wheel Alignment/Headlamp Adjustment**

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

## **Braking Warning**

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



# SAFETY WARNINGS

## SAFETY WARNING

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any Max Trac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any Max Trac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

**DAMAGE, INJURY AND/OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.**



**PART# 301940**

**2019+ GM 1500 2WD/4WD**  
Does not fit Trail boss or AT4 models

**4" REAR LOWERING KIT**



4 HOUR INSTALL TIME



Recommended Tire size 31x10.50



\*DOES NOT FIT 2022+ MODELS EQUIPPED WITH CAST STEEL SPRING PERCHES MONO-LEAF, LEAF SPRINGS & ROUND U-BOLTS.

\*YOUR EXHAUST SYSTEM MAY HAVE TO BE MODIFIED FOR PROPER CLEARANCE AT THE NEW LOWER STANCE

Components	Hardware	Hardware Pack #
(2) AXLE RELOCATORS	(2) M16-2.0 X 120 HEX CAP SCREW	3019H-RH
(2) LEAF SPRING PLATES	(2) M16-2.0 NYLOCK NUT	
(2) U-BOLT RETAINER PLATES	(4) M16 FLAT WASHER	
(1) DS LIFT HANGER	(2) 1/2-13 X 1 1/2" HEX CAP SCREW	
(1) PS LIFT HANGER	(2) 1/2 FLAT WASHER	
(1) DS SPRING HANGER SUPPORT	(2) 1/2" SPLIT LOCK WASHER	
(1) PS SPRING HANGER SUPPORT	(2) 7/16-14 X 1 1/4" HEX CAP SCREW	
(1) 3019-D NUT PLATE	(2) 7/16-14 NYLOCK NUT	
(1) 3019-P NUT PLATE	(4) 7/16" FLAT WASHER	
(2) 3019BSP NUT PLATES	(5) M8-1.25 X 20	
(2) LOW PROFILE BUMP STOPS	(5) M8-1.25 FLANGE NUT	
(2) SHIM-02 AXLE SHIM		
(3) BRAKE LINE BRACKETS	(5) M8 FLAT WASHER	
(4) 8.75" SQ U-BOLTS	(8) 9/16" HIGH NUT (8) 9/16" THICK WASHER	
(2) LIFT SHACKLES	(2) M14-2.0 X 110 HEX CAP SCREW (2) M14-2.0 NYLOCK NUT (2) M14 FLAT WASHER	


**Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged**

**PRIOR TO INSTALLATION:**

1. Factory service manual is recommended to have on hand.
2. Secure and properly block vehicle prior to beginning installation.
3. Always wear safety glasses when using power tools or working under the vehicle
- 4 Modification to any part will void the warranty associated with that product

AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION

REVISED 9/12/24

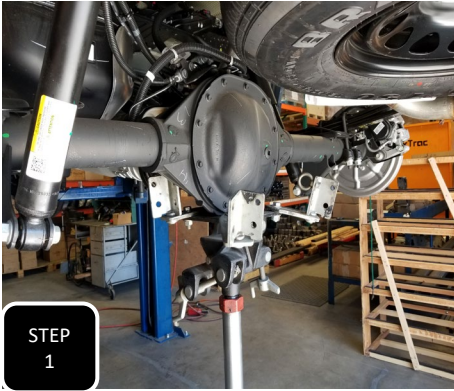

**Step 1** Jack up the rear of the vehicle and support under the frame rails with jack stands. Leave an adjustable jack under the differential for height adjustment.



**Step 2** Jack up the adjustable jack slightly to apply pressure to the axle then unbolt both shocks at both ends and remove.



**Step 3** Remove the U-bolts and spring plates on one side only.



**Step 4** Loosen then remove the bolt attaching the shackle to the frame.





**Step 5** Loosen then remove the bolt attaching the spring to the frame at the front of the leaf spring and then remove the leaf spring.



**Step 6** Unbolt the brake line guide bracket from the mounting bracket just under the spring perch on the axle and pull the line clear of the area.




**Step 7** Using a suitable cutting devise, cut the brake line guide bracket off of the axle and remove.

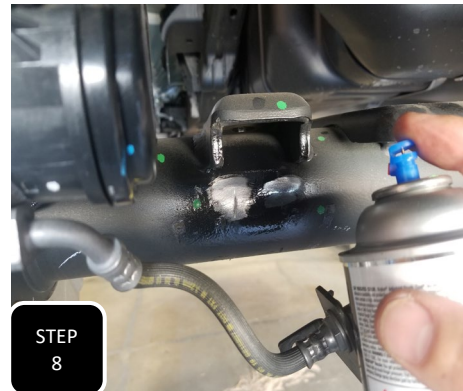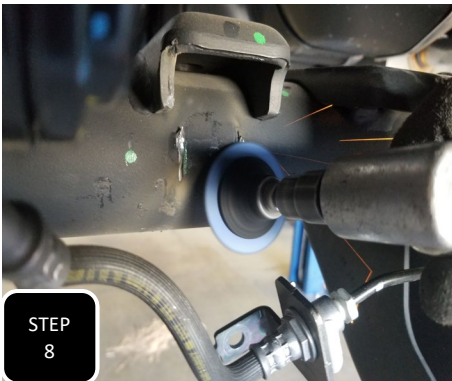

**Step 8** Clean up any sharp edges and spray paint the area for rust prevention.




**Step 9** The leaf pack will now need to be dis-assembled. Attach two clamps to the spring and remove the center pin along with the U-bolt retainer plate and the factory 2 degree shim. (Only 2019 models have this shim) **NOTE: DISCARD THE U-BOLT RETAINER PLATE. IT DOES NOT GET RE-USED.**

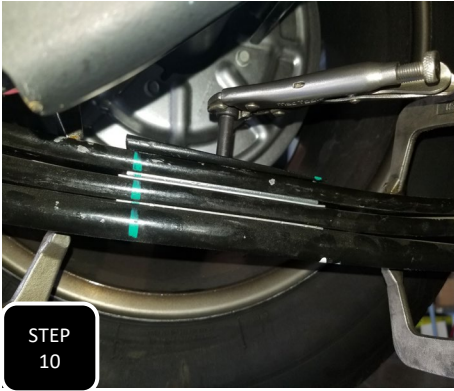


**Step 10** Slide the center pin through the factory 2 degree shim and install the pin down through the top of the leaf spring with the thick end of the shim facing the front of the truck. Then tighten the center pin. **NOTE: ONLY 2019 MODELS HAVE THIS 2 DEGREE SHIM.**



**Step 11** While the spring is out of the truck, install the new shackle using the provided 14mm bolt. Make sure to install the bolt in the same direction as stock, pointing away from the frame, and leave loose. **NOTE: DO NOT INSTALL A WASHER ON THE HEAD SIDE OF THE BOLT.**

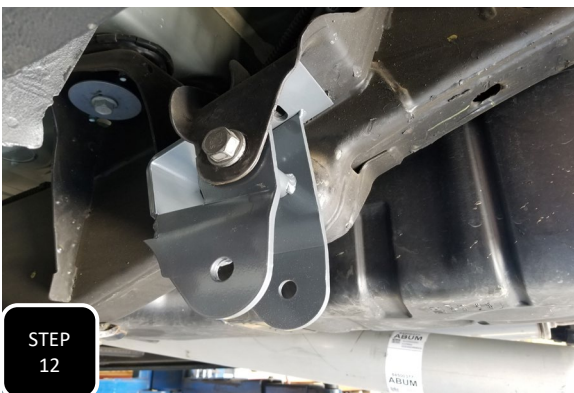

**Step 12** Locate the driver's side hanger and loosely install it into the driver's side, front leaf spring mount. Use the factory bolt at the main leaf spring hole and the provided 7/16" bolt, nut, and washer up through the top of the hanger. Tighten the 7/16" bolt first and then the main leaf spring bolt.

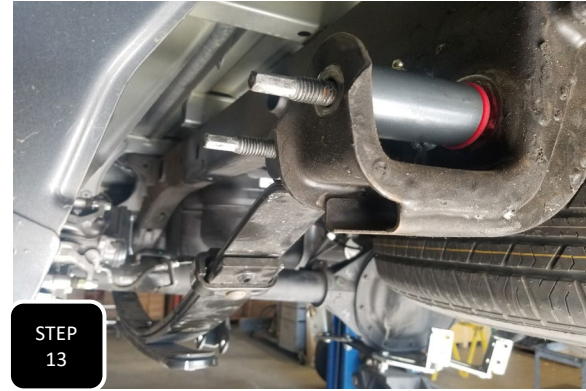



**Step 13** Jack up the axle and loosely re-install the leaf spring underneath the axle using the provided 16mm bolt at the front of the spring and the factory bolt at the shackle.




**Step 14** For 2020-2023 models, place the supplied 2 degree shim on the center pin with the thick end facing the rear of the truck. For 2024+ models, install the shim with the thick side facing the front of the truck. Next, place the axle relocater on top of the shim with the brake line mounting bracket facing rearward. Slightly loosen the U-bolts on the other side and then lower the axle into the relocater.





**Step 15** Place the U-bolt retainer plate on top of the original spring plate and run the new U-bolts downward through the provided spring perch under the leaf pack and tighten. **NOTE: THE U-BOLTS WILL INSTALL JUST LIKE THE FACTORY ONES DID. DO NOT TORQUE THE U-BOLTS DOWN AT THIS TIME.**

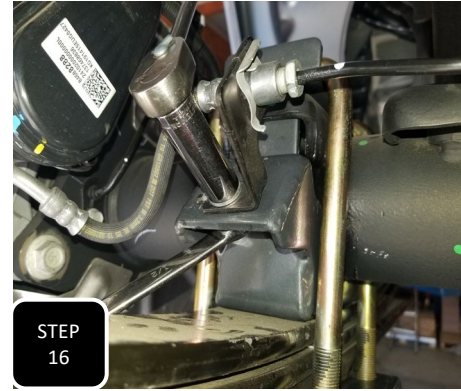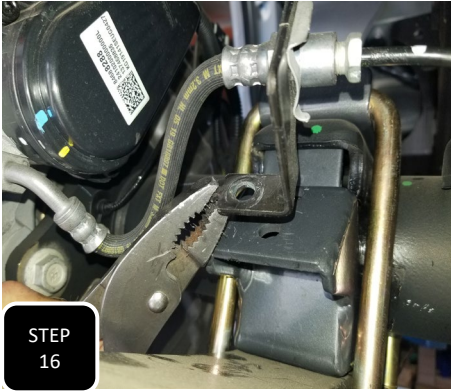

**Step 16** Locate the brake line mounting bracket still attached to the brake line and bend the guide tab to a flat position. Next, attach this bracket to the mounting bracket on the back side of the axle relocater using the provided M8 bolt, nut, and washer.

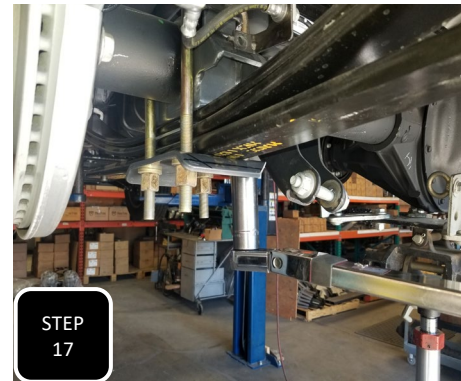

**Step 17** Repeat steps 3-13 on the other side then when both sides are complete, torque the U-bolts to 100 ft/lbs.

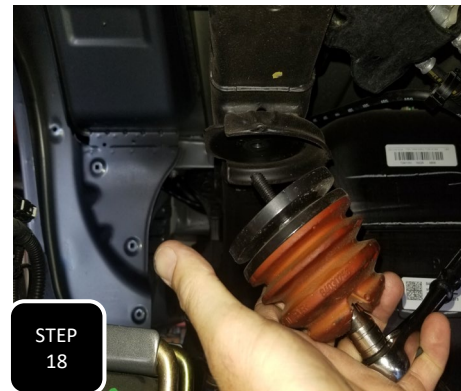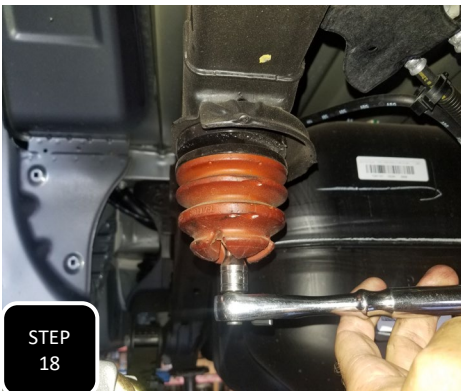

**Step 18** Unbolt both of the factory rear bump stops from the frame and remove.



**Step 19** Unbolt the brake line guide bracket on the inside of the driver's side frame rail and support out of the way. Next, you will need to cut off the welded on bump stop plate using a suitable cutting device. Make a clean cut on each side of the frame rail.



**Step 20** Once both cuts are made, it may help to hit the cut piece with a hammer until it breaks loose and then remove it from the frame. Next, clean up any sharp edges and spray paint for rust prevention.



**Step 21** Once spray painted, re-install the brake line bracket using the factory bolts and tighten.



**Step 22** Unbolt the three bolts attaching the brake line bracket to the top of the differential then pull it slightly up and forward.




**Step 23** Locate the three "Z" shaped brake line brackets and loosely attach them to the factory bracket first using the provided hardware, and then to the diff using the factory hardware. The provided brackets are designed to push the factory bracket down and forward for more clearance between the diff and the bed.




**Step 24** Insert the driver's side, zinc plated nut plate into the hole in the outside of the frame, just back from the front leaf spring mount. **NOTE: THE NUT WILL LINE UP WITH THE SLOTTED HOLE IN THE BOTTOM OF THE FRAME.**



**Step 25** Loosely attach driver's side hanger support bracket using the provided M16 nut and washer at the hanger and the provided 1/2" bolt and washers at the frame. Tighten the 1/2" bolt at the frame, but do not fully tighten the 16mm spring bolt until the truck is on the ground at ride height.

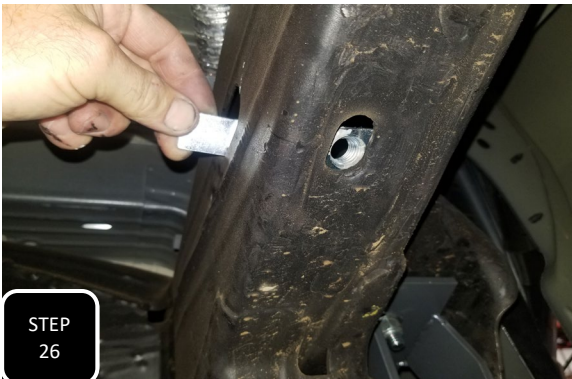

**Step 26** Insert the pass side, zinc plated nut plate into the hole in the outside of the frame, just back from the front leaf spring mount. **NOTE: THE NUT WILL LINE UP WITH THE SLOTTED HOLE IN THE BOTTOM OF THE FRAME.** Again, do not fully tighten the leaf spring bolt until the truck is on the ground at ride height.

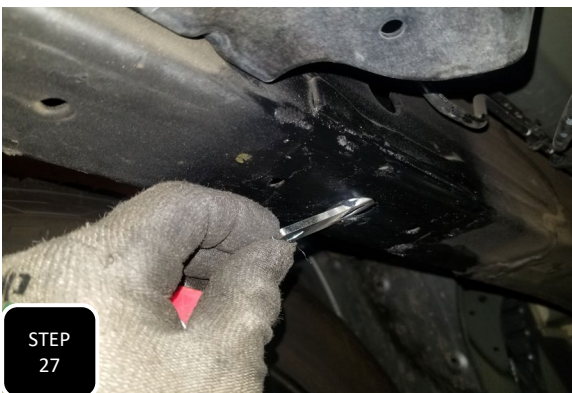

**Step 27** Insert the bump stop nut plates into the hole in the bottom of the frame that emerged after you removed the driver's and passenger's side factory bump stop plate. Thread the provided low profile bump stop into the nut plate until tight.




**Step 28** Remove both mounting bolts that attach the transmission to the mount at the cross member at the rear of the trans. Jack the trans up, insert the provided 1/2" tall, gold spacer, and tighten down using the factory bolts. **NOTE: THE USE OF THE PROVIDED 1/4", SILVER SPACER MAY ONLY BE NEEDED IF DRIVE LINE VIBRATION IS EXPERIENCED.**

**CAUTION:** MAKE SURE THERE THAT THE DRIVE SHAFT DOES NOT CONTACT THE CROSS MEMBER DIRECTLY ABOVE AND CLOSE TO THE TRANSMISSION. IF IT APPEARS TOO CLOSE FOR COMFORT, THEN EITHER CLEARANCE THE CROSS MEMBER A BIT OR ONLY USE THE 1/4" THICK TRANSMISSION SPACER.



**NOTE: IF YOUR TRUCK HAS A 2 PIECE DRIVELINE, THEN THESE SPACERS WILL NOT WORK FOR YOUR TRUCK.**

**Step 29** If your truck is 4wd and you experience driveline vibration, take the provided transmission spacer and cut it in half. You will now be able to install the two pieces between your transfer case and the cross member it sits on. Start with the silver, 1/4" tall spacer. **NOTE: IF VIBRATION STILL PERSISTS AFTER INSTALLING THE SPACER, YOU MAY NEED TO TAKE THE TRUCK TO A DRIVE LINE SPECIALIST.**

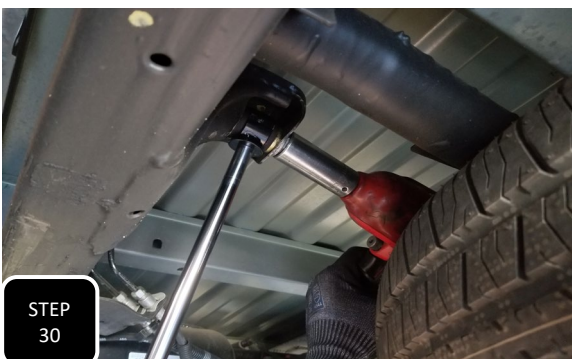

**Step 30** Install the new shorter shocks with the shaft of the shock attached at the frame and the body of the shock attached at the axle. **NOTE: IF YOU PURCHASED SHOCK EXTENDERS, NOW WOULD BE THE TIME TO INSTALL THEM ALONG WITH THE FACTORY SHOCKS. USE THE EXTENDER INSTRUCTIONS FOR INSTALL.**

**Step 31** Install the wheels and tires then lower the truck to the ground. Jump on the rear bumper a few times then tighten up all 6 leaf spring/shackle bushings while the truck is at ride height.

## **AFTER MODIFYING YOUR SUSPENSION**

**\*HAVE THE VEHICLE'S ALIGNMENT CHECKED**

**\*PROPERLY ADJUST YOUR HEAD LIGHTS FOR THE NEW STANCE OF THE SUSPENSION**

**\*GREASE THE SHACKLE BUSHINGS USING A SYNTHETIC OR SILICONE BASED GREASE**

**\*RE-TORQUE ALL BOLTS AFTER 500 MILES**



**MaxTrac**  
s u s p e n s i o n

## RIDE HEIGHT SHEET

\*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR \_\_\_\_\_ MAKE \_\_\_\_\_ MODEL \_\_\_\_\_

4WD / 2WD / AWD

### MEASUREMENTS

\*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

\*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

\*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

# LIMITED LIFETIME WARRANTY

Max Trac Suspension makes no warranty, expressed or implied, as to the merchantability, fitness for purpose, description, quality, productivity, accuracy or any other matter with respect to either product, all warranties being hereby specifically and expressly disclaimed by Max Trac. Max Trac makes no offer of technical advice or assistance in regard to the products based on laboratory and/or field experience and customer understanding and a receipt of such advice represents only good faith opinions and does not constitute a warranty or guarantee. The sole and express warranty provided by Max Trac is to warrant that the products sold as listed comply with Max Trac's specifications at the date and time of manufacture. Max Trac makes no warranty that its products shall meet its specifications at any time after installation of products. Use of such product is specifically not warranted, and Max Trac specifically excludes from this express warranty parts subject to normal wear and tear after one year, finish after one year, damage resulting from failure to follow recommendations in installation manuals, competition or off-road use, and damages caused by aftermarket products. Max Trac's liability and customer's sole remedy for a breach of this limited express warranty is limited to repair, replacement, or refund at Max Trac's option and in Max Trac's sole discretion. There are no warranties which extend beyond the description on the face hereof.

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

## **WARRANTY RETURN**

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA#).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

## **NON-WARRANTY RETURN CREDIT POLICY**

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA#).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

## **Return Options**

Merchandise that has been installed, used, or altered may be subject to no credit.

## **Restocking Fee**

All items are subject to a restocking fee based on the condition of the packaging and product.

Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt.

All returns will be credited to your Maxtrac account.



# INSTALLATION WARNINGS

**READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.**

**MAXTRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.**

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

**MAXTRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES**

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

## **Final C e s A d j u s t m e n t s**

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and ABS lines for adequate slack at full extension, and adjust as necessary.



# ADDITIONAL WARNINGS

## **WARNING**

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A Factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

**FAILURE TO PERFORM POST INSTALLATION INSPECTION AND/OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND/OR PERSONAL INJURY OR DEATH.**

**RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THERAFTER.**

## **Vehicle Handling Warning**

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

## **Wheel Alignment/Headlamp Adjustment**

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

## **Braking Warning**

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



# SAFETY WARNINGS

## SAFETY WARNING

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any Max Trac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any Max Trac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

\*\*\*\*\*

**DAMAGE, INJURY AND/OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.**