



UPPER REPLACEMENT GRILLE WITH LED DRL, TURN SIGNALS, AND EMBLEM SURROUND

(2011-2016 F-250 / F-350)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille w/ LED Lights
- (5) Lower Clips
- (1) Fuse Tap
- (1) Ring Terminal
- (4) Scotchlok Connectors
- (6) Cable Ties

TOOLS REQUIRED

- 10mm Socket
- Ratchet
- Flathead Screwdriver/Pry Tool
- Panel Removal Tool
- Wire Crimper/Stripper


SKU # SD56408

STEP 1



Open the vehicle hood. Using a panel removal tool, remove the air dam plastic push pin. Remove (4) 10mm bolts along the top of the grille.

STEP 2

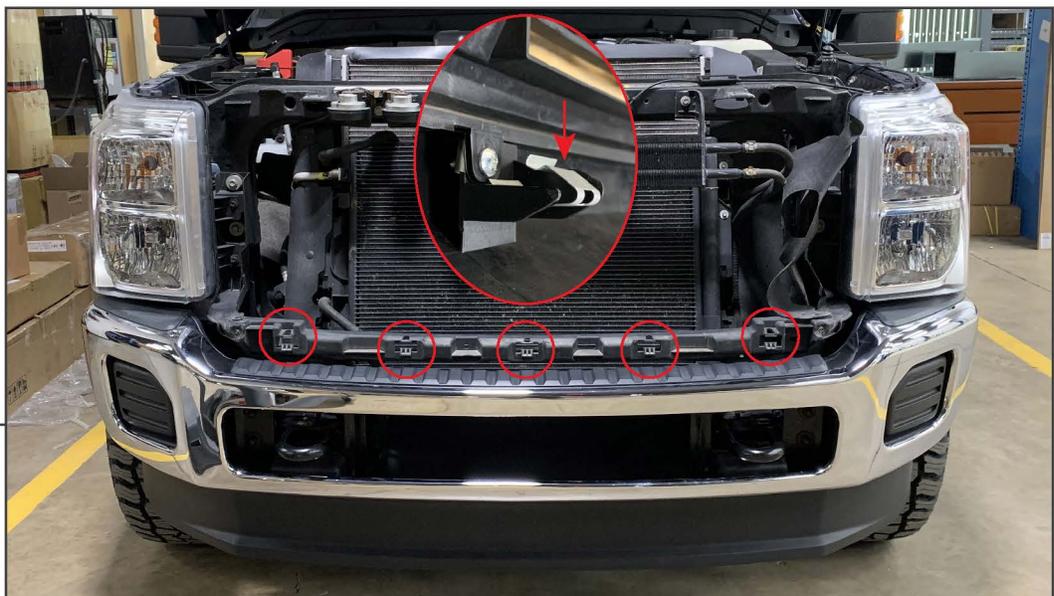

Slightly pull the top of the grille away from the vehicle to locate the lower metal mounting clips. Using a flathead screwdriver, disconnect the (5) metal clips securing the bottom of the grille to the radiator support. Remove the grille from the vehicle, and place on a soft surface for disassembly.




STEP 3

Remove (1) 10mm bolt from the upper grille panel. Remove (5) plastic push clips from the upper grille panel, and transfer the panel to the new grille using the original hardware.



STEP 4


Install the provided (5) metal clips to the bottom of the new grille. Ensure the clips are fully placed into the mounting area.

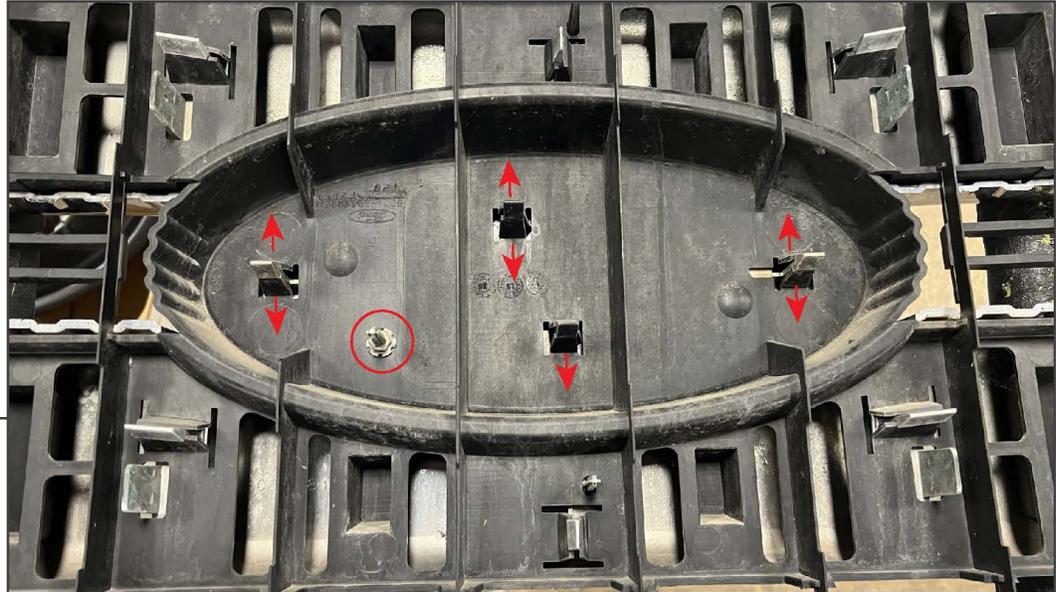

STEP 5

Remove (1) 10mm nut from the back of the vehicle emblem. Then, use a pry tool to disengage the retaining tabs securing the emblem into place.


With the emblem removed, firmly press the emblem into the new grille and secure using the original (1) 10mm nut.

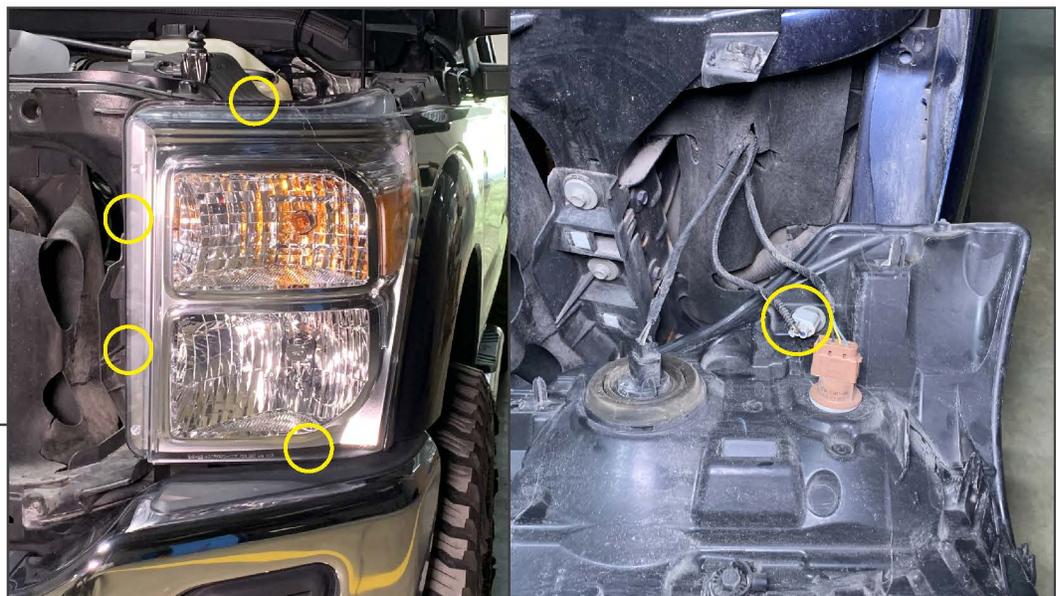

STEP 6

(3) Amber LED Lights Wiring: Remove (4) 10mm bolts from the LH headlight assembly. Remove the headlight and locate the parking light harness. Splice into the parking light harness using the following diagram.

<u>Grille LED Harness</u>	-	<u>Vehicle Parking Light Harness</u>
Black/White	-	Yellow/Blue
Black	-	Black

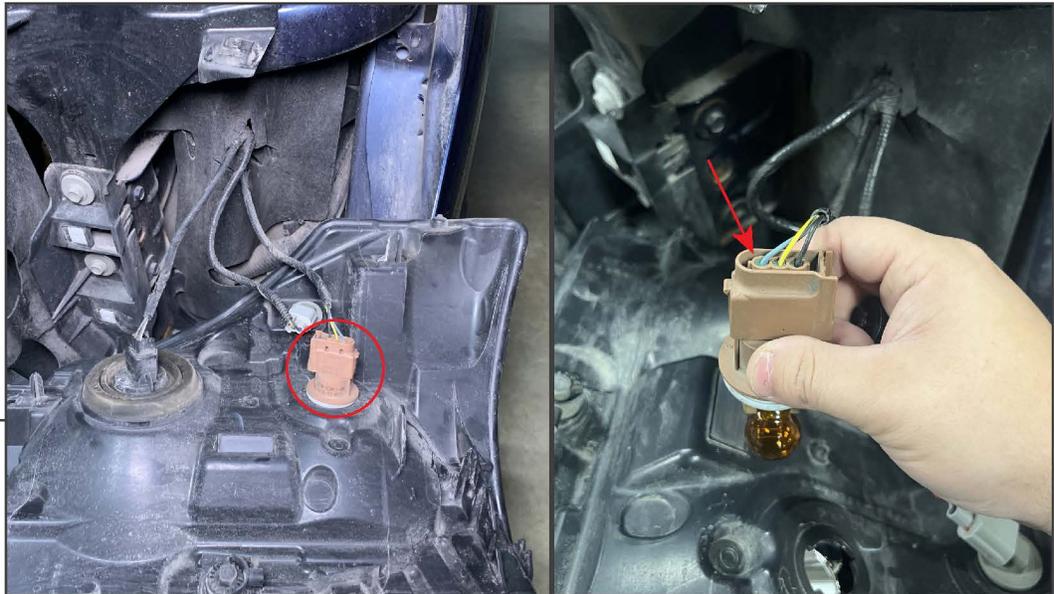

STEP 7

DRL & Turn Signal LED Lights Wiring: Remove (4) 10mm bolts from each vehicle headlight assembly. Remove the headlights and locate the turn signal harness. Splice into the turn signal harness using the following diagram. Route the Red & Black leads towards the vehicle fuse box.

<u>Grille LED Harness</u>	-	<u>Vehicle Parking Light Harness</u>
Yellow	-	Yellow/Purple [LH] / Light Blue [RH]



STEP 8

DRL & Turn Signal LED Lights Wiring (cont.): Install the included fuse tap to the red wire lead, and the included ring terminal to the black wire lead. Fit the fuse tap into the vehicle fuse box replacing fuse # 52. Then, route the wiring out of the fuse box and re-install the lid. Secure the ground ring terminal to a clean suitable grounding point.

Note: Notching the fuse box lid may be necessary for proper lid fitment.



STEP 9

Plug all wiring harnesses into the new grille assembly, test lighting for functionality. Secure all wiring harnesses using the (6) cable ties. Secure the grille to the vehicle reusing the original grille mounting hardware.

Installation is now complete.