

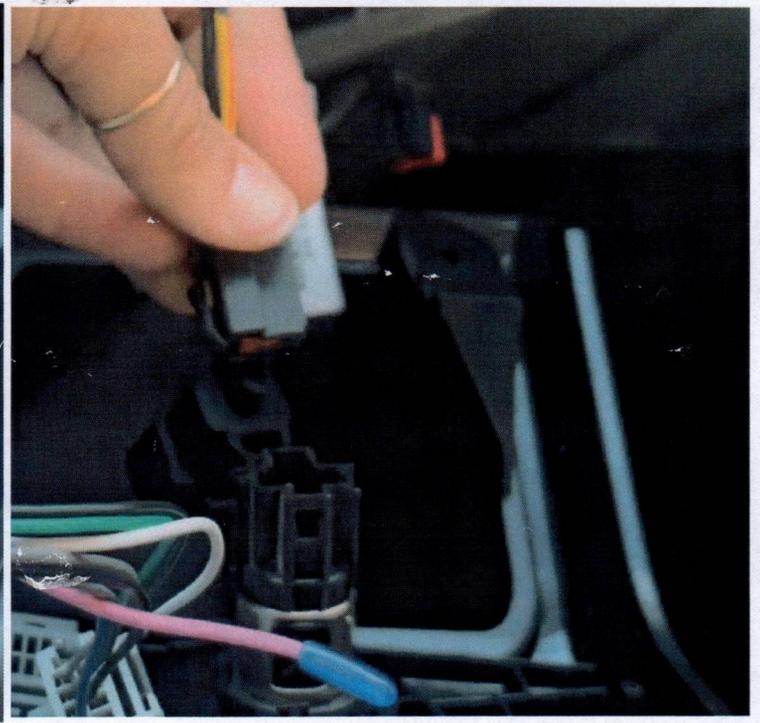


1. 3.5MM external MIC
2. 4G signal ANT plug
3. Fixed bracket
4. GPS ANT
5. Radio ANT
6. Main harness
7. 4G signal ANT plug
8. USB cable
9. SIM caed port cable
10. RCA cable
11. Aux audio-MIC-cable

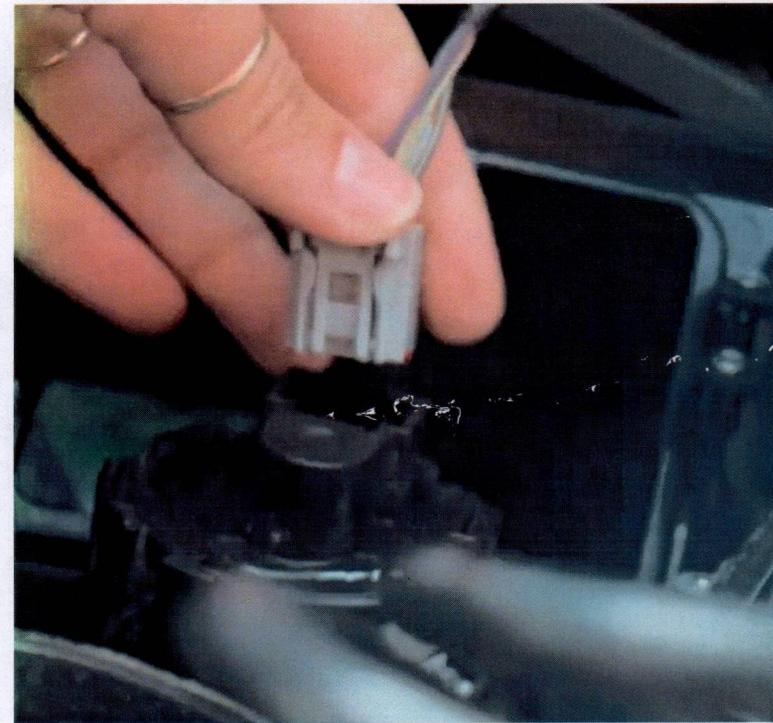

**Plug in all OEM parts**

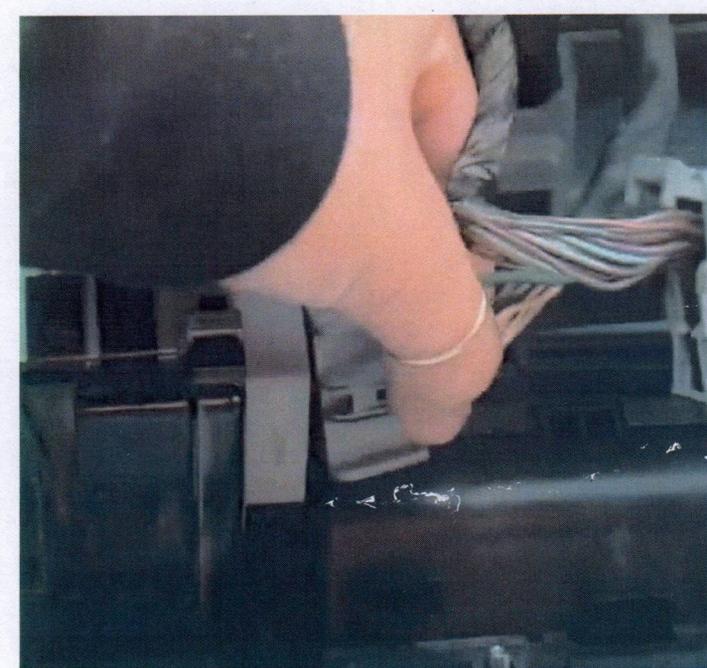


**The installation is complete**

OEM Radio ANT




OEM rear seat bass plug



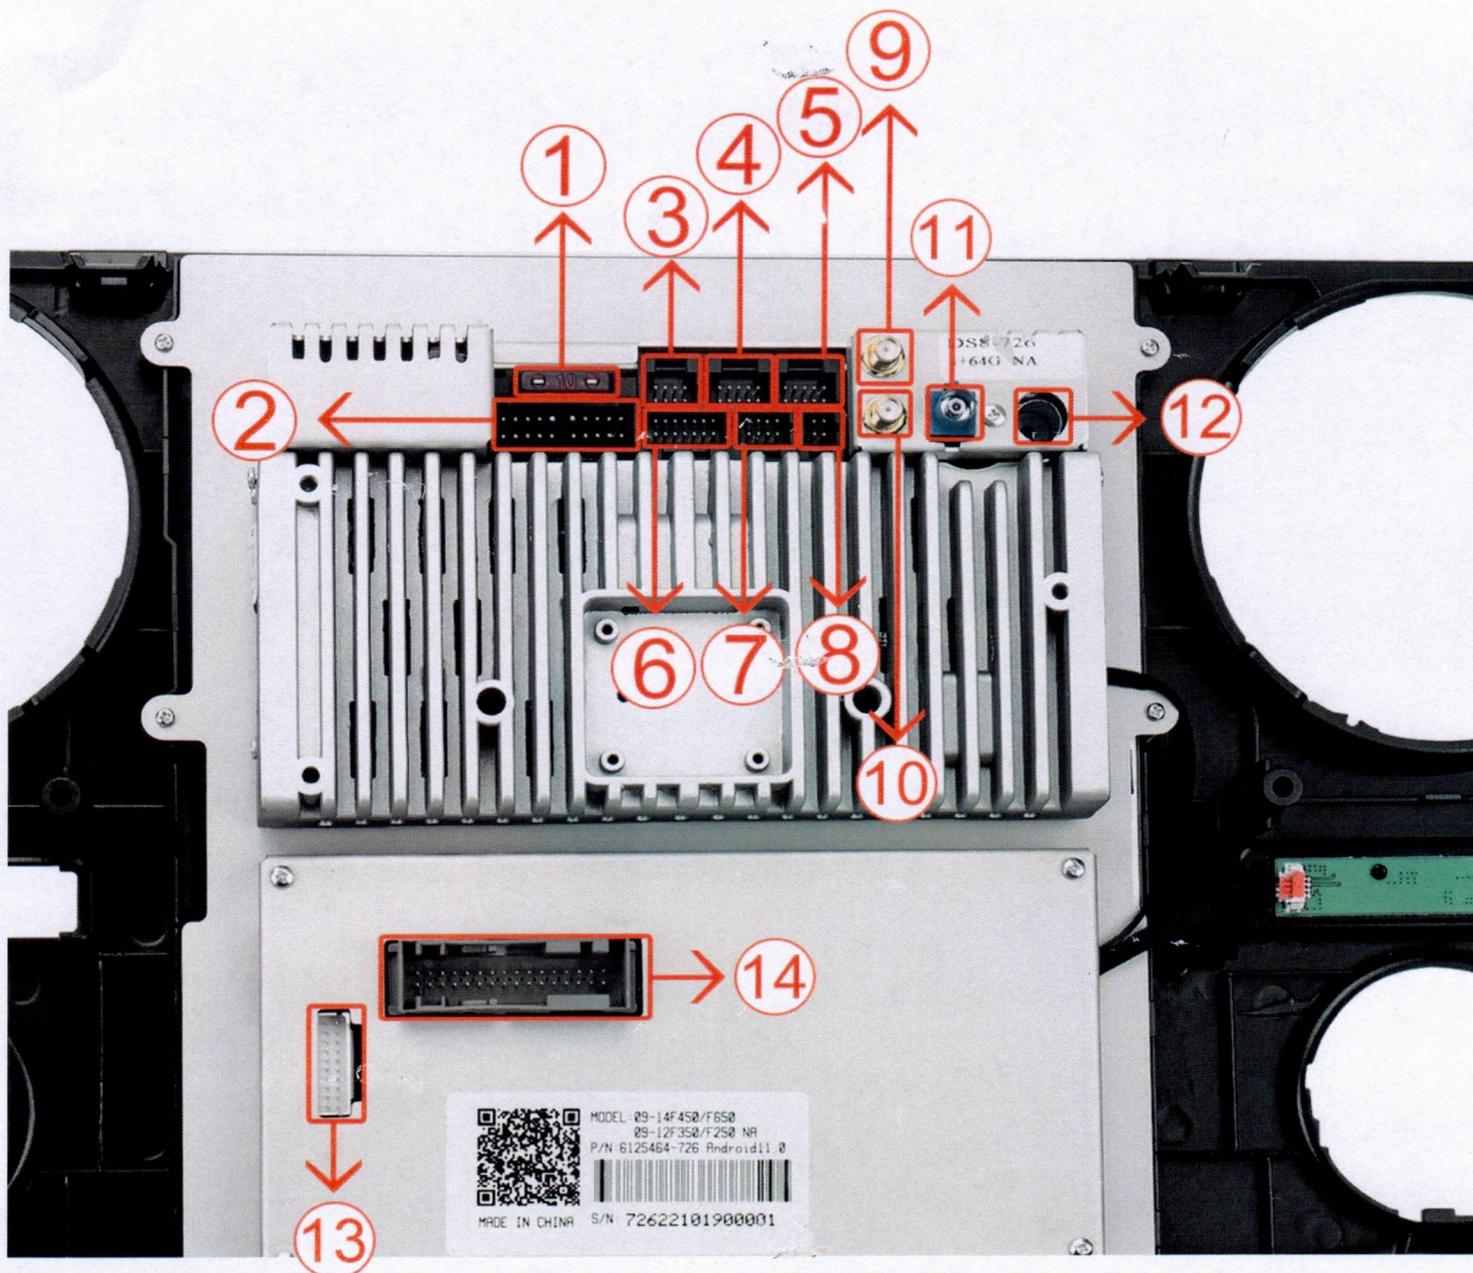


- 1. Fuse    2. Head unit power socket**
- 3. RCA Harness socket**
- 4. AUX-CAMERA Harness socket**
- 5. 4G Card slot cable socket**
- 6. Useless    7. USB plug socket**
- 8. External MIC socket**
- 9,10. 4G ANT SOCKET    11. GPS ANT socket**
- 12. Radio ANT socket    13. 20 PIN-CAN- socket**
- 14. Factory AC plug socket**

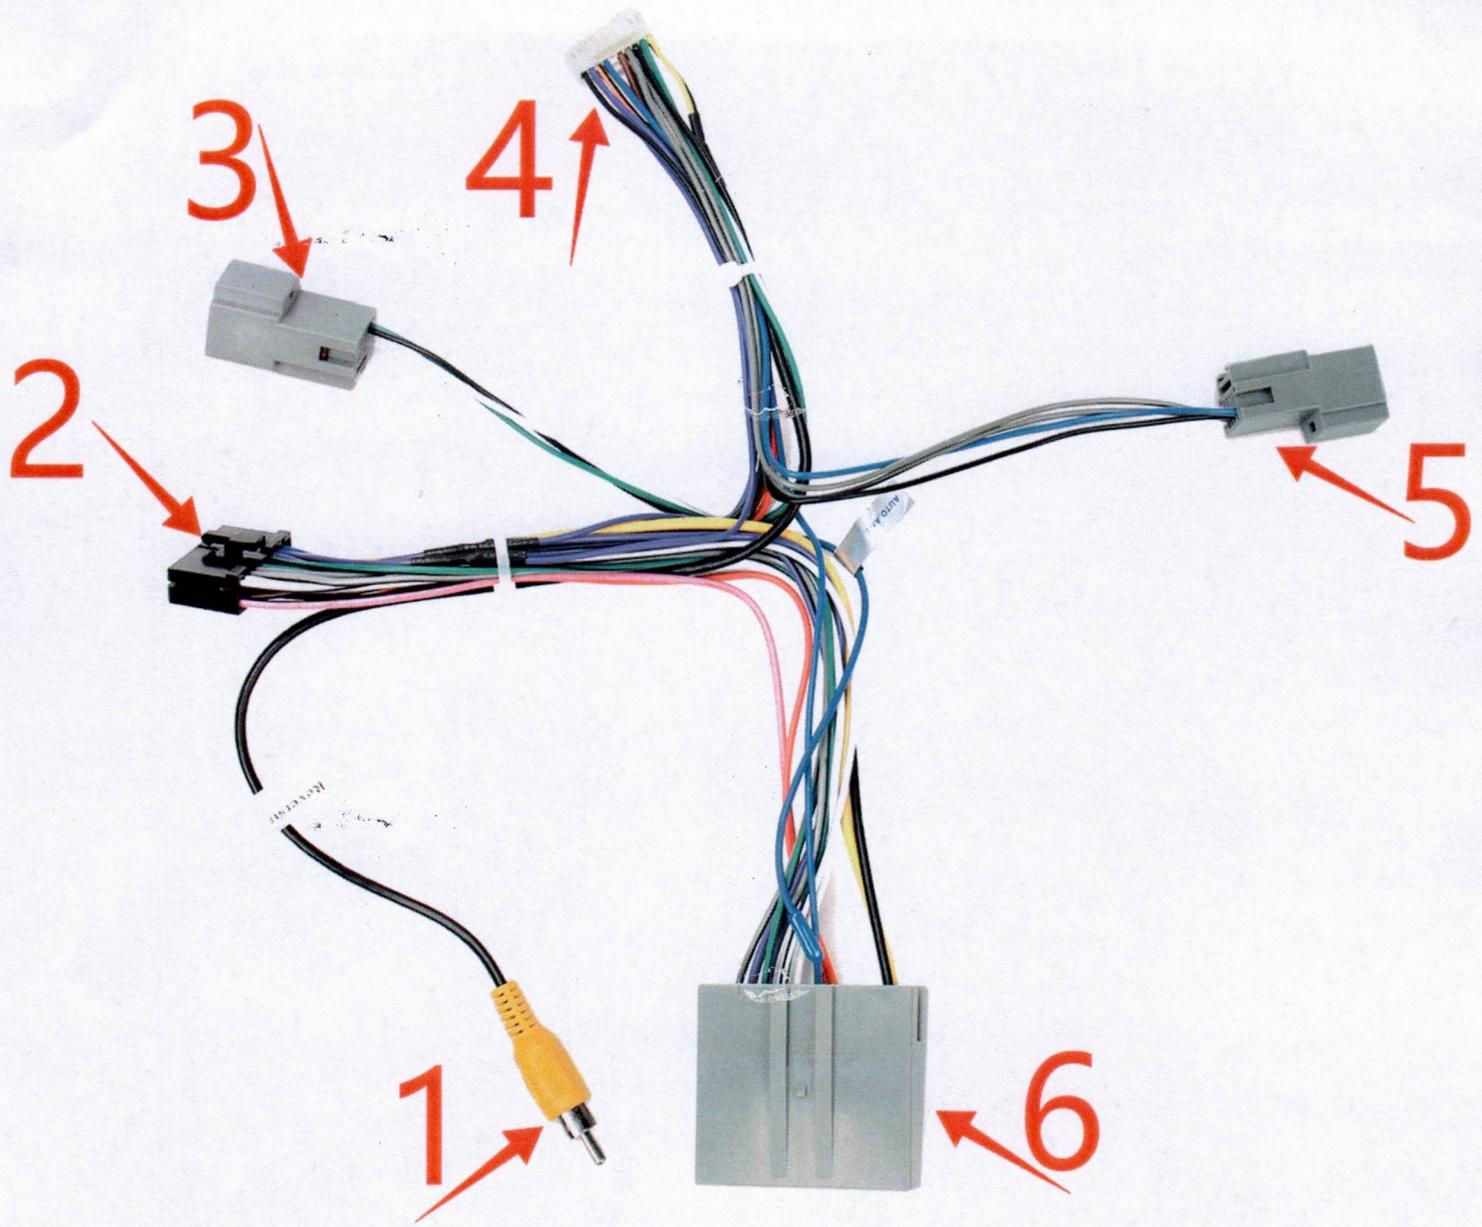


1. factory reverse camera signal input plug
2. power plug to head unit
3. 10pin Factory camera plug

Note: If your truck's OEM reverse camera is displayed on the stock radio, then you need to connect this 10pin plug. If your truck's reverse camera is displayed on the rear view mirror, don't need this plug.

4. CANBUS plug to head unit
5. OEM rear seat bass plug
6. power cable plug to car

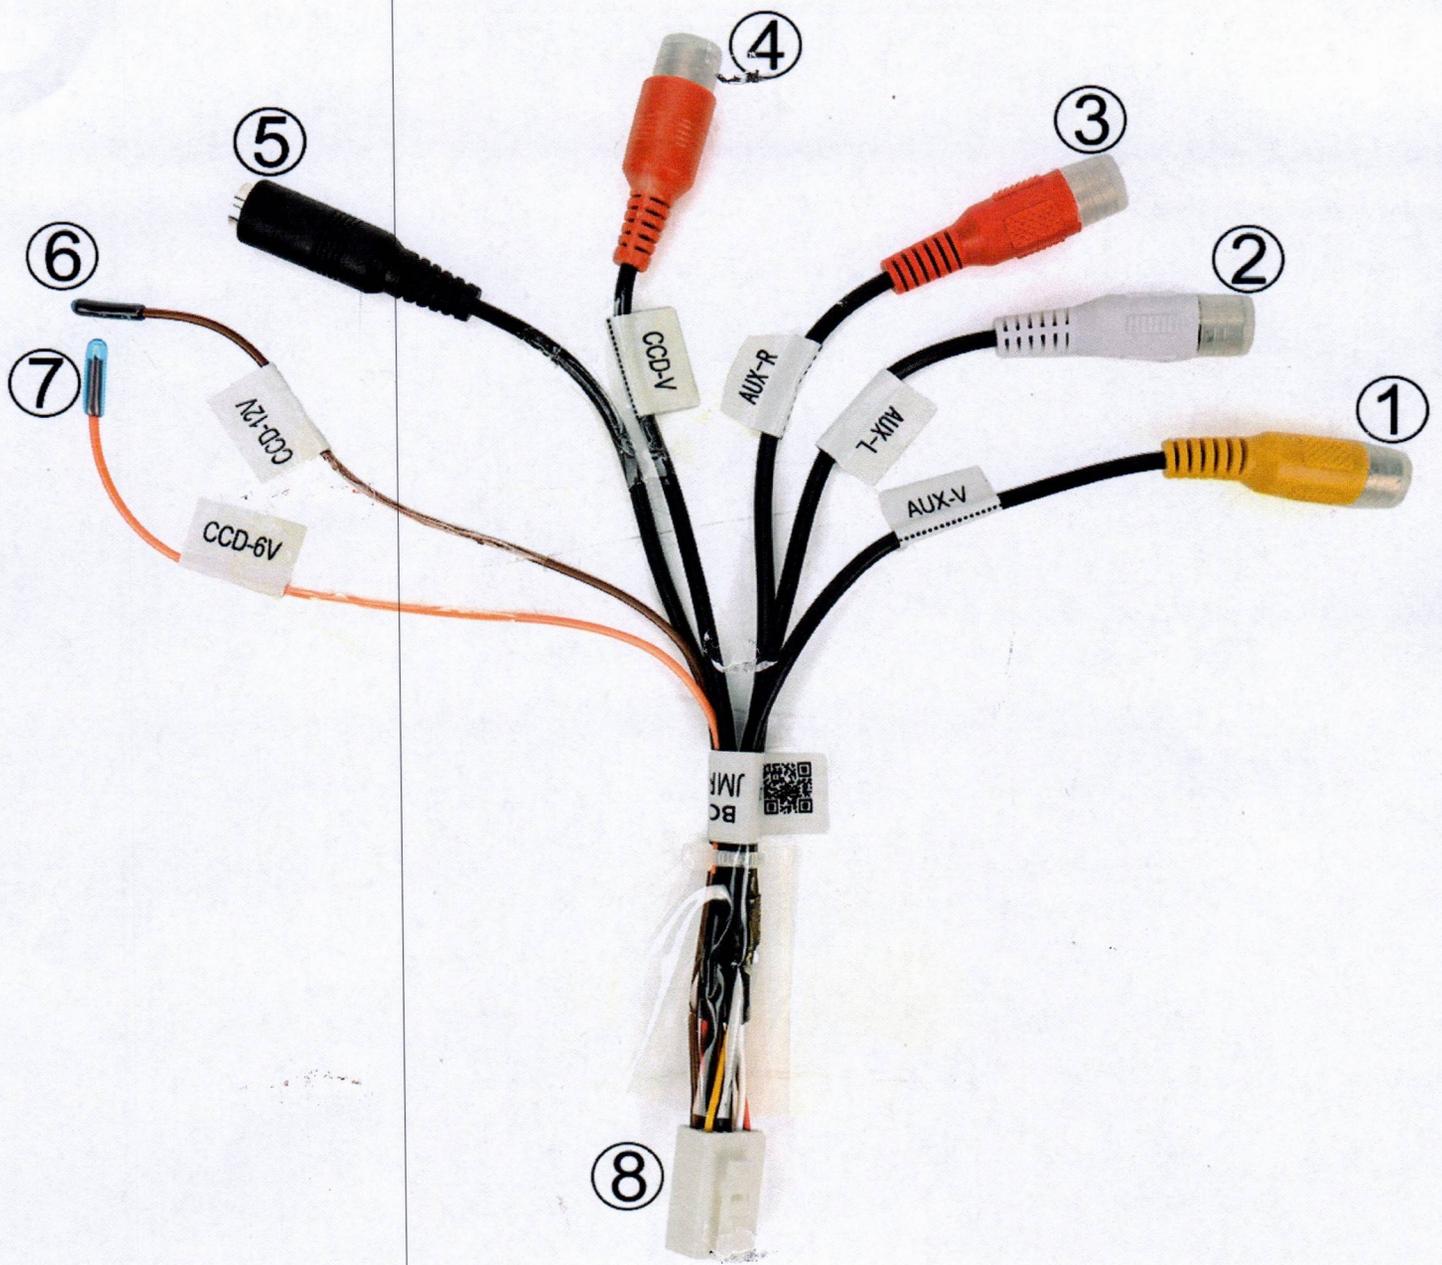

- 1. AUX-V**
- 2. AUX-L**
- 3. AUX-R**
- 4. CCD-V [For factory/  
Aftermarket reverse camera]**
- 5. MIC**
- 6. CCD-12V**
- 7. CCD-6V**
- 8. AUX-VIDEO-MIC PLUG**

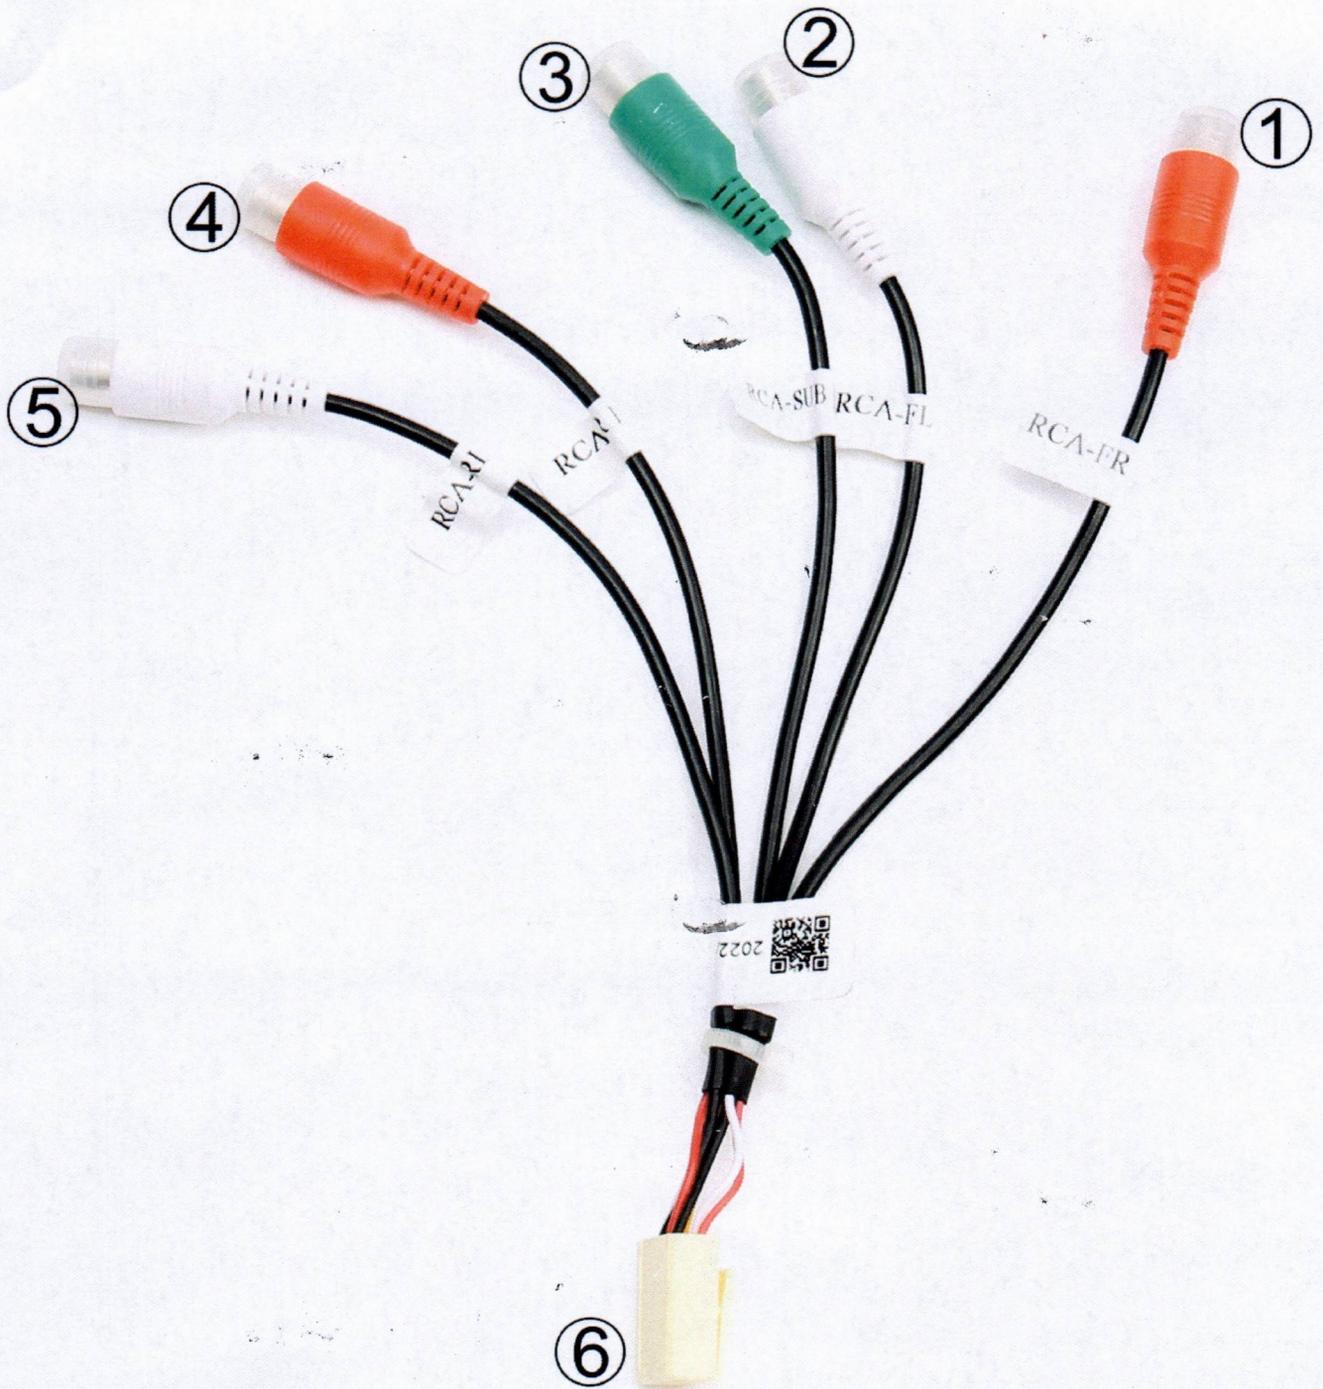

**1 RCA-FR**

**2 RCA-FL**

**3 RCA-SUB**

**4 RCA-RR**


**5 RCA-RL**

**6 RCA-harness**


**RCA harness is for aftermarket SUB**


# Connect T-Style head unit to Truck

OEM AC plug to head unit

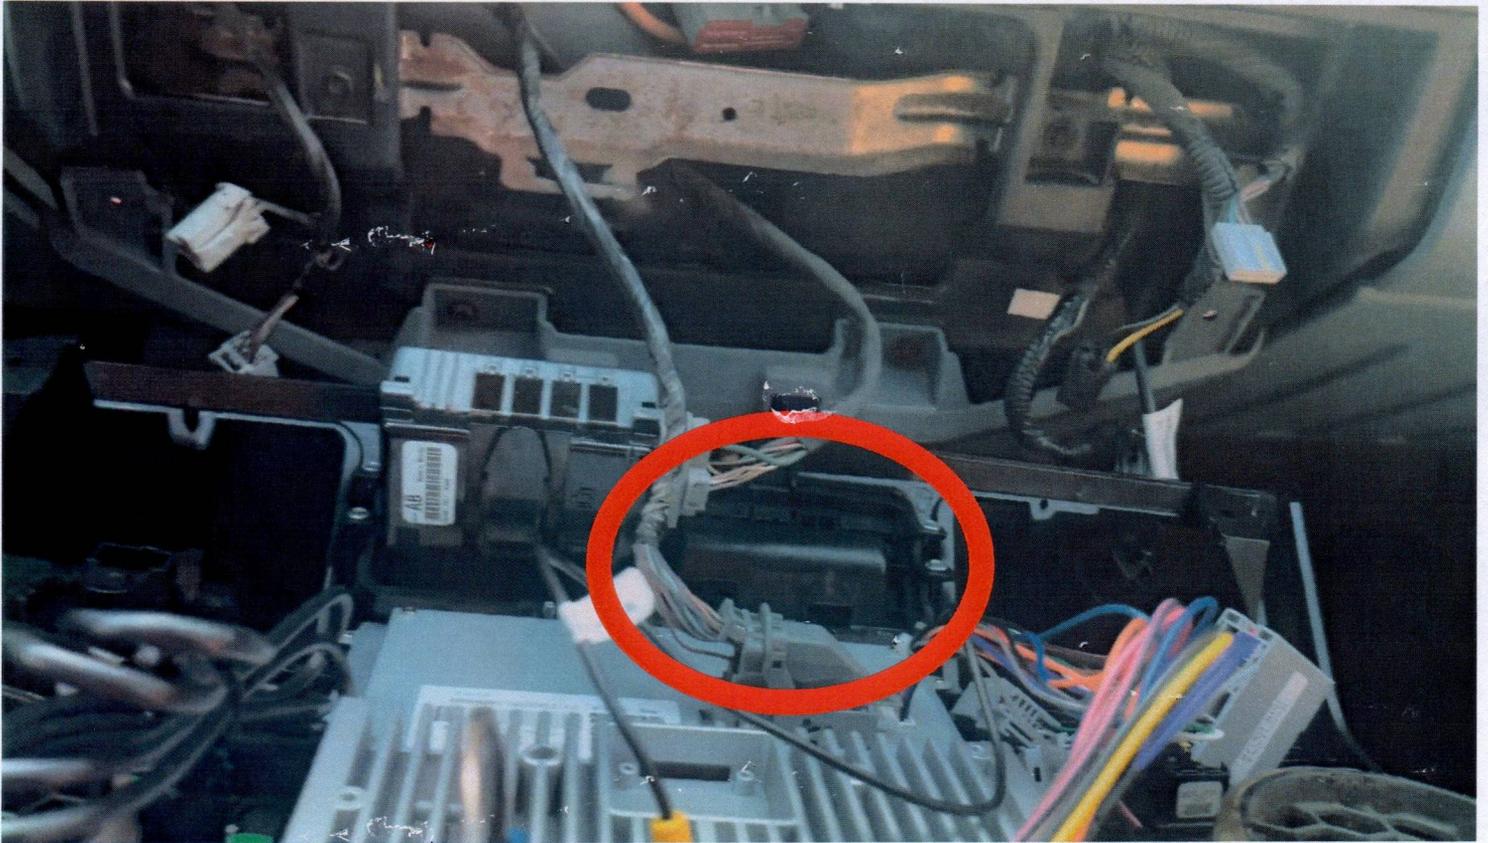


Power cable connect to car

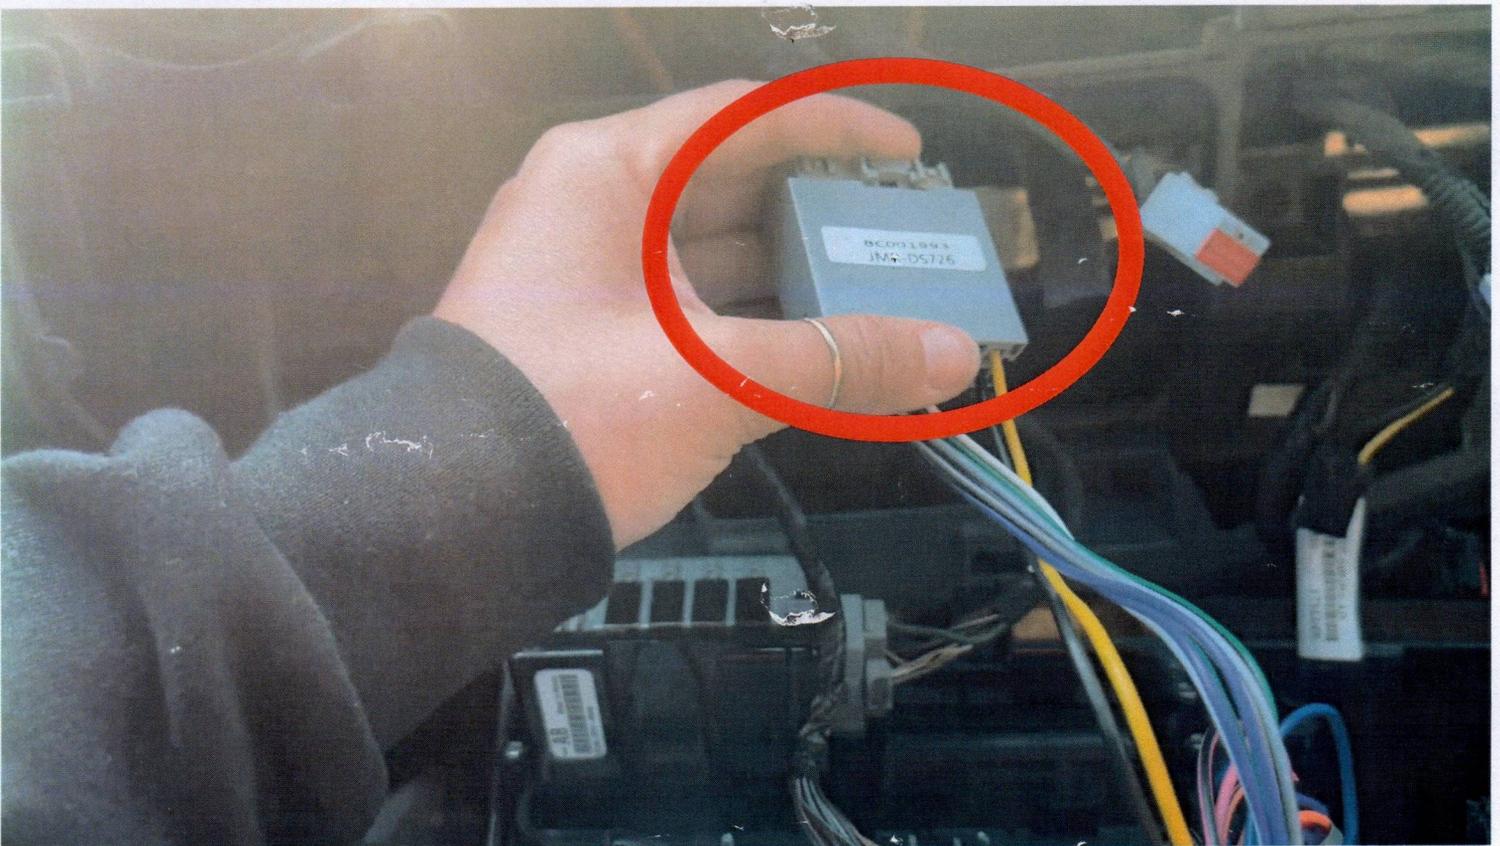


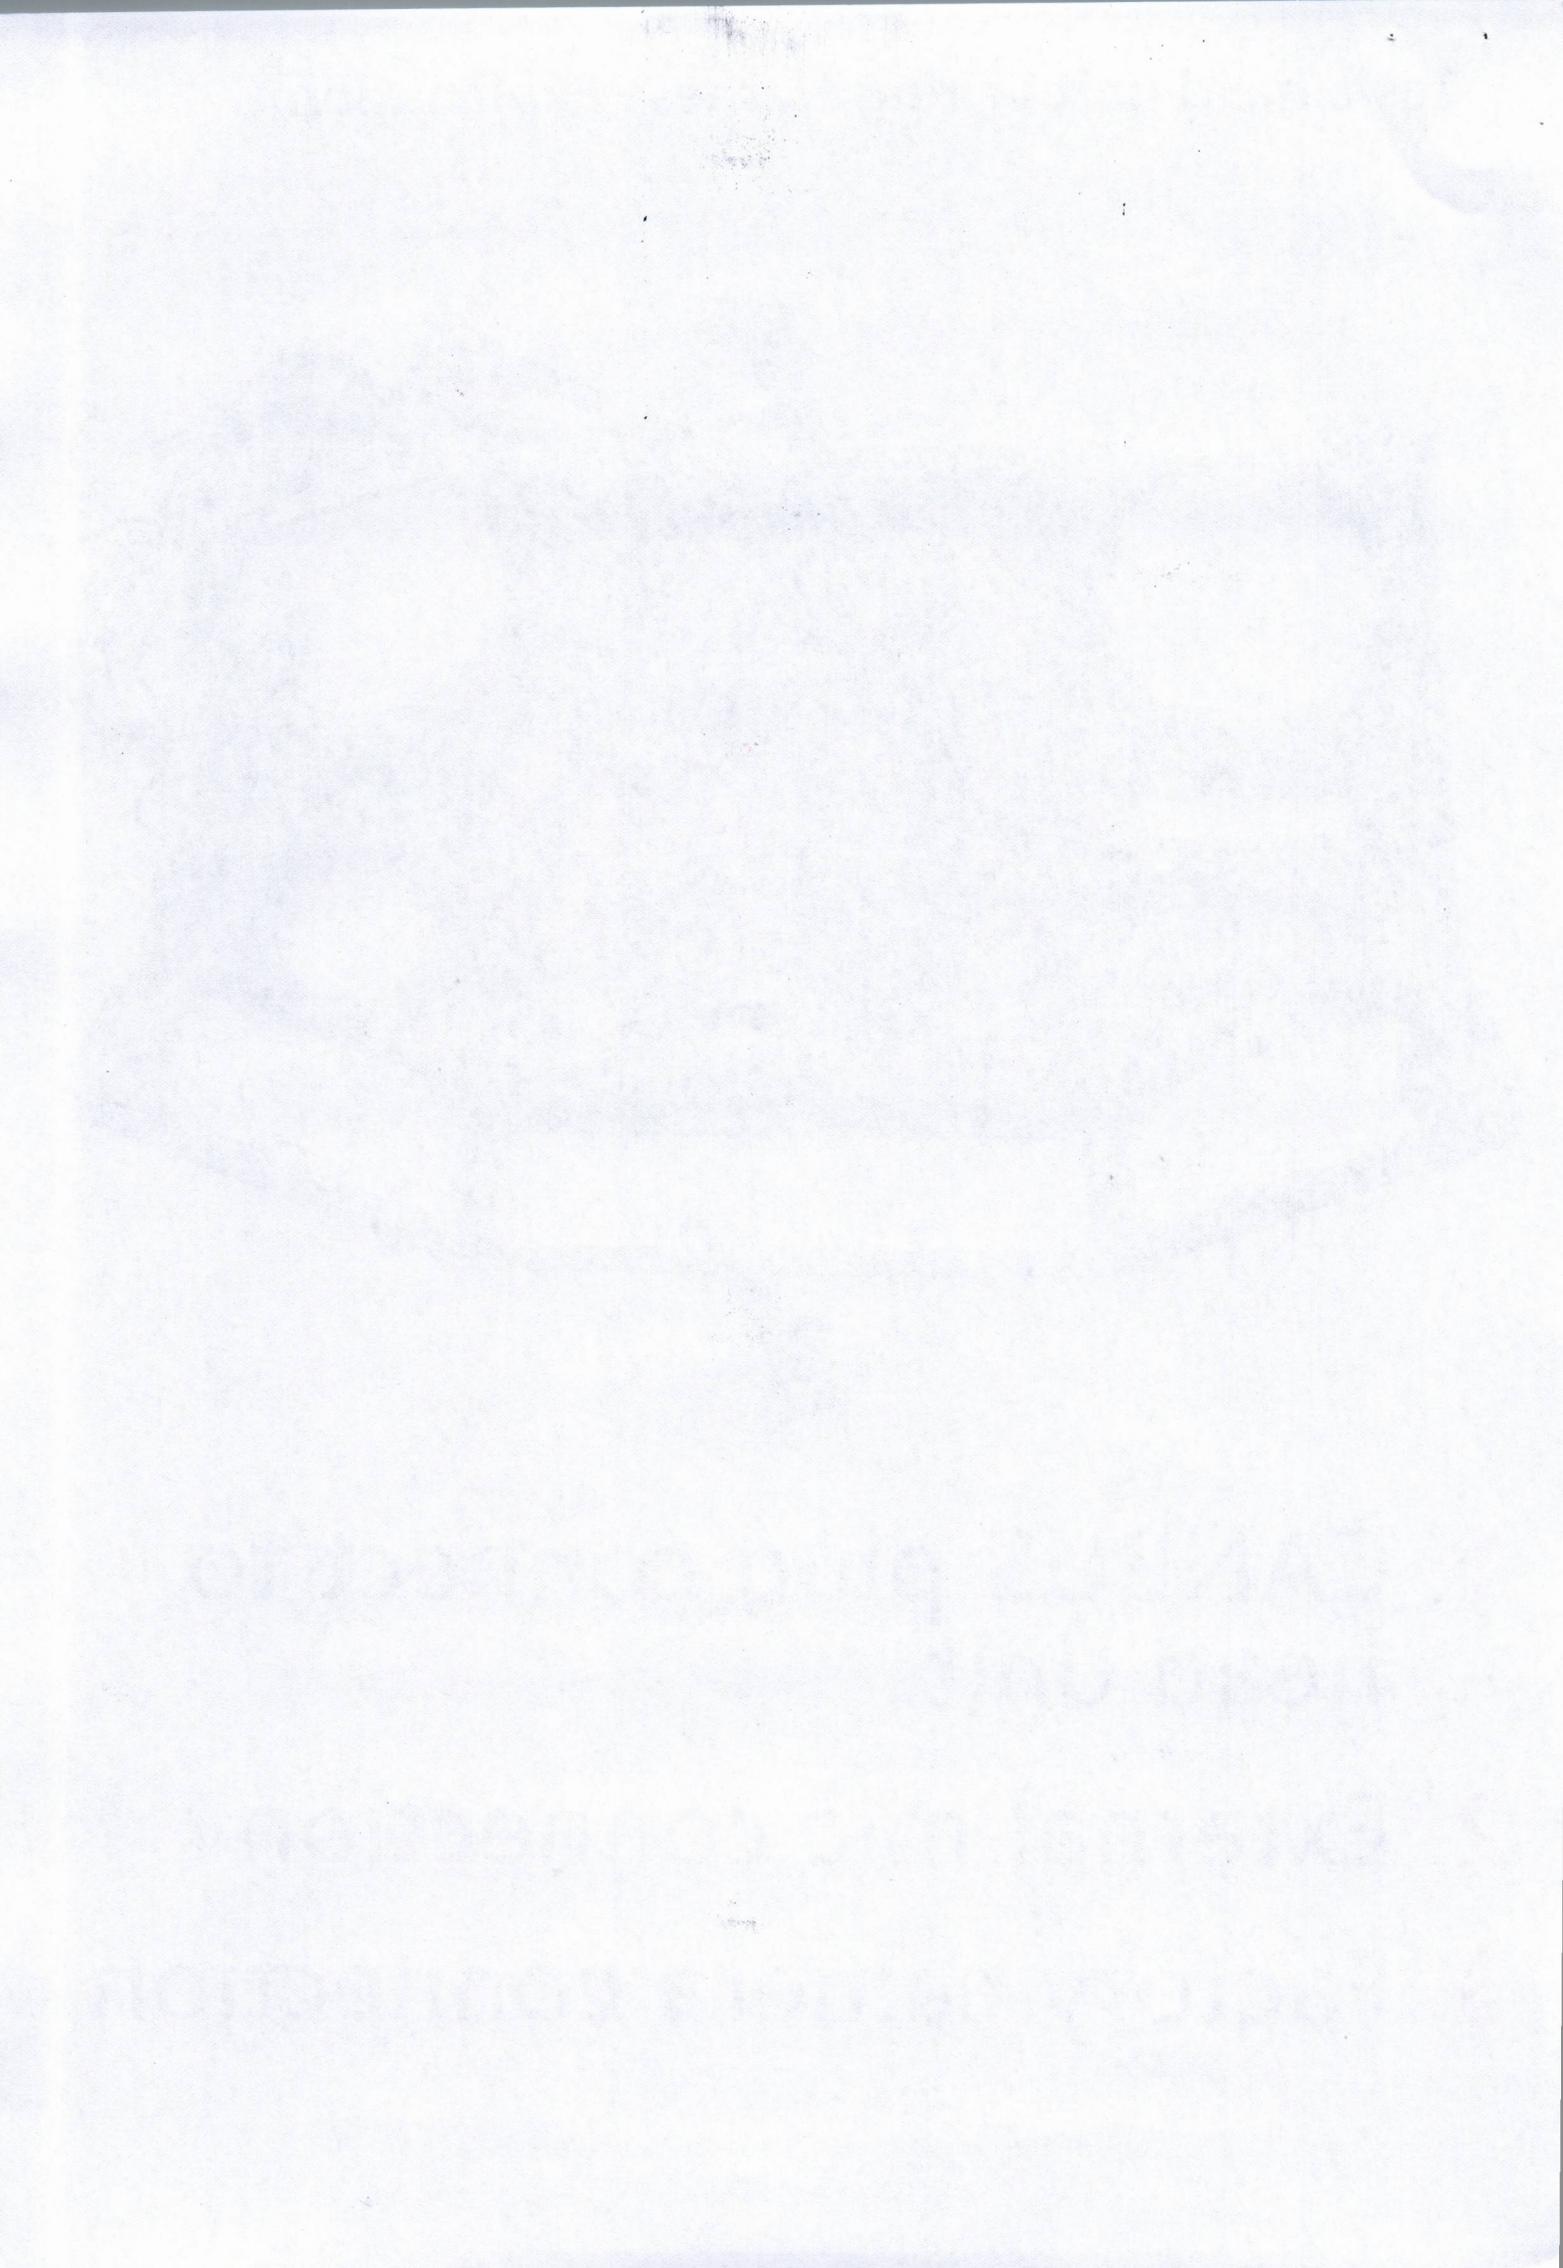

# Tesla head unit Wiring Harness Explanation

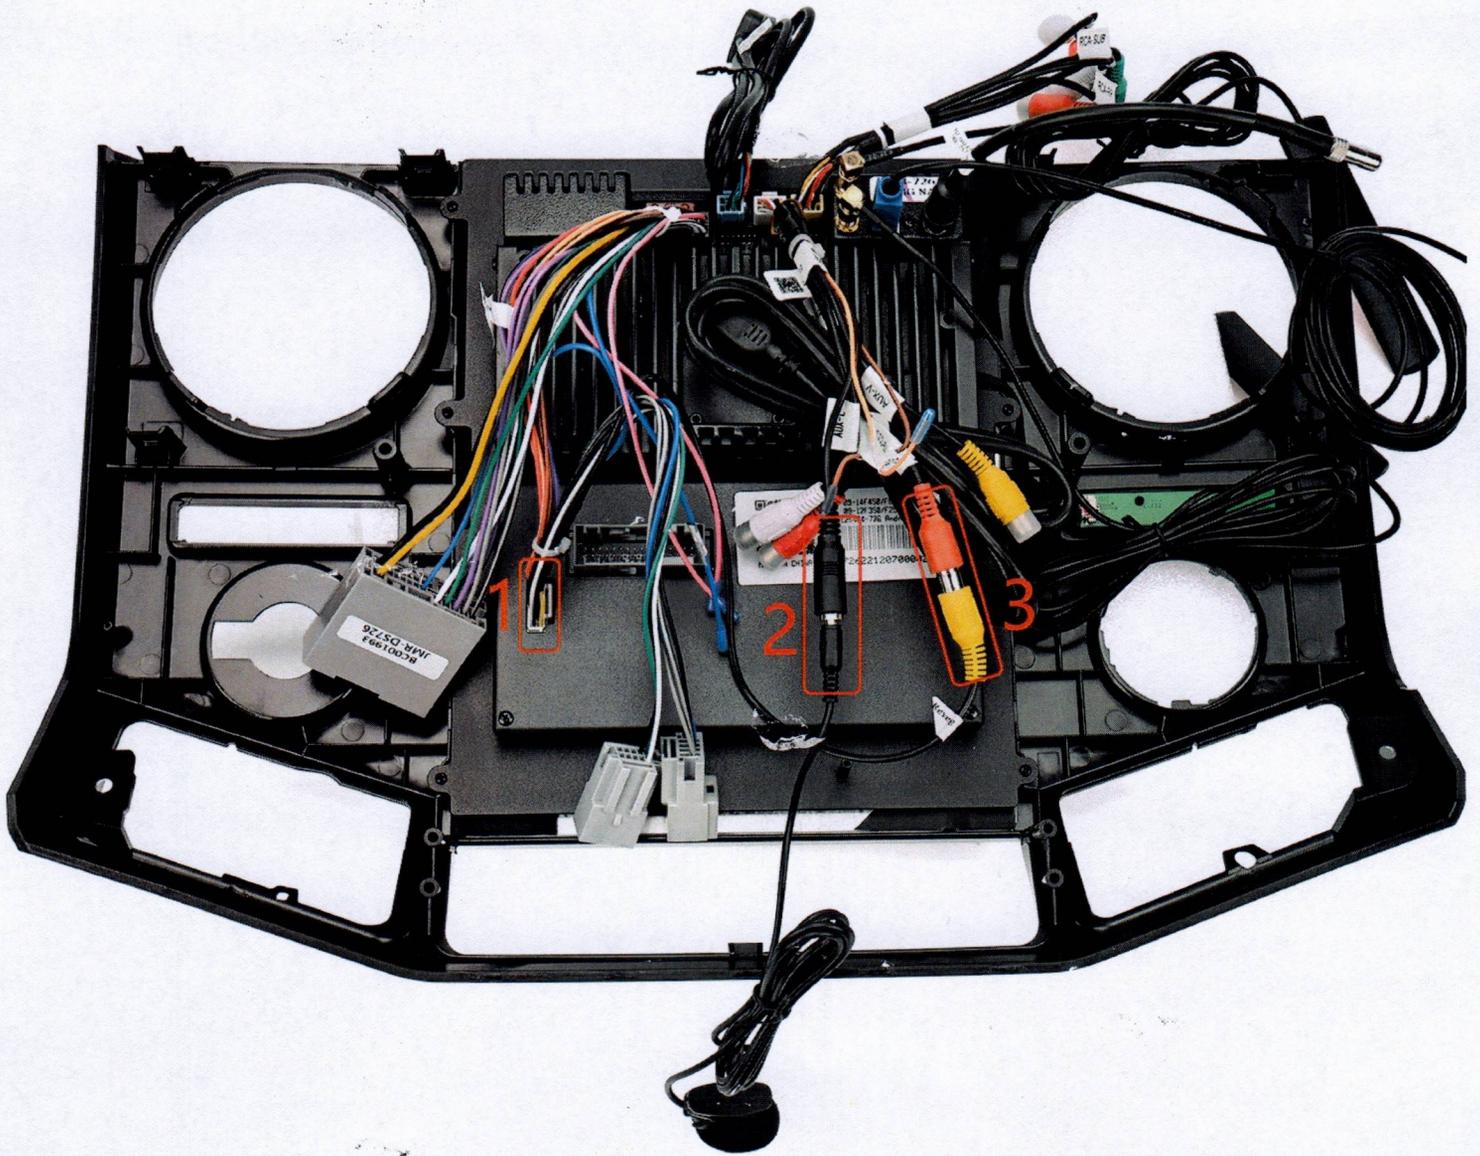

1. CANBUS plug connect to head unit
2. External mic connection
3. Factory camera connection

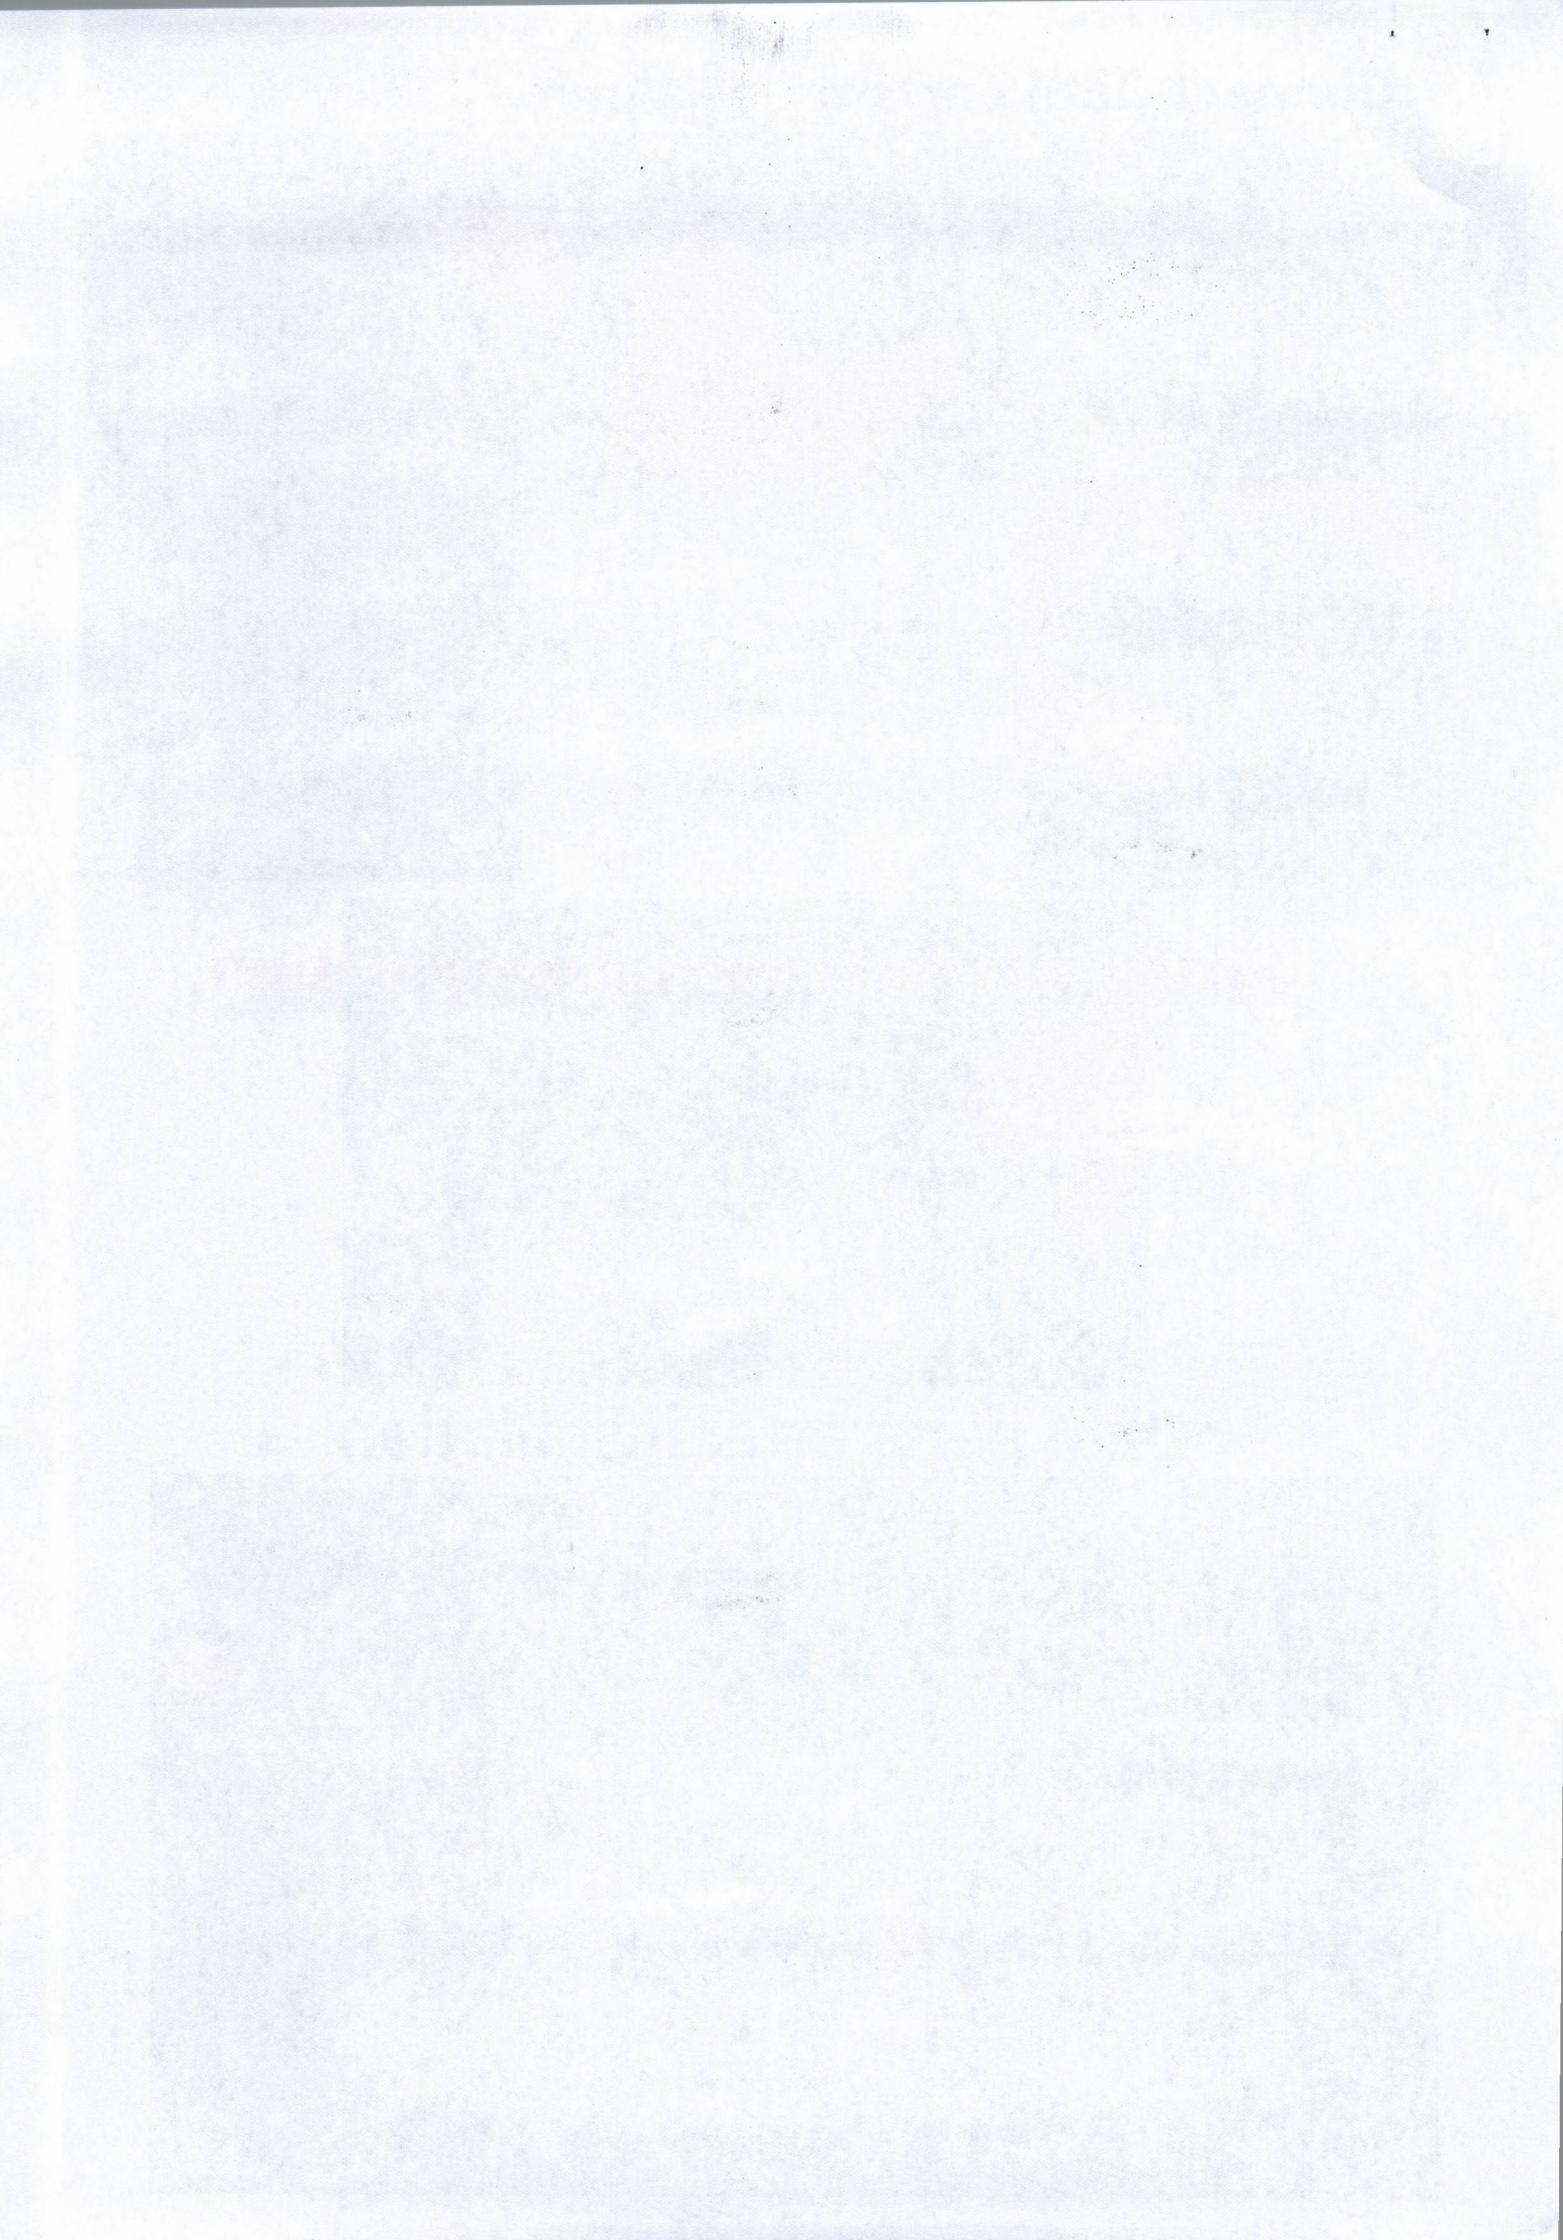


## Connect OEM parts to tesla unit



## OEM parts




## Fixing bracket installation position

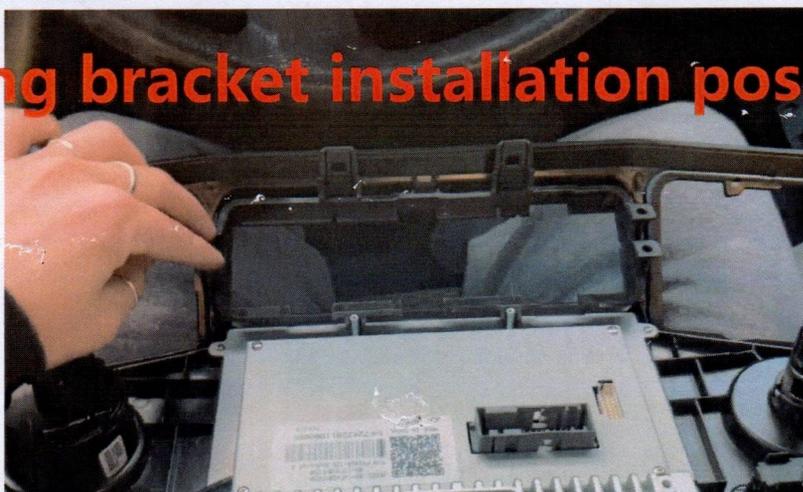

## OEM parts after installation



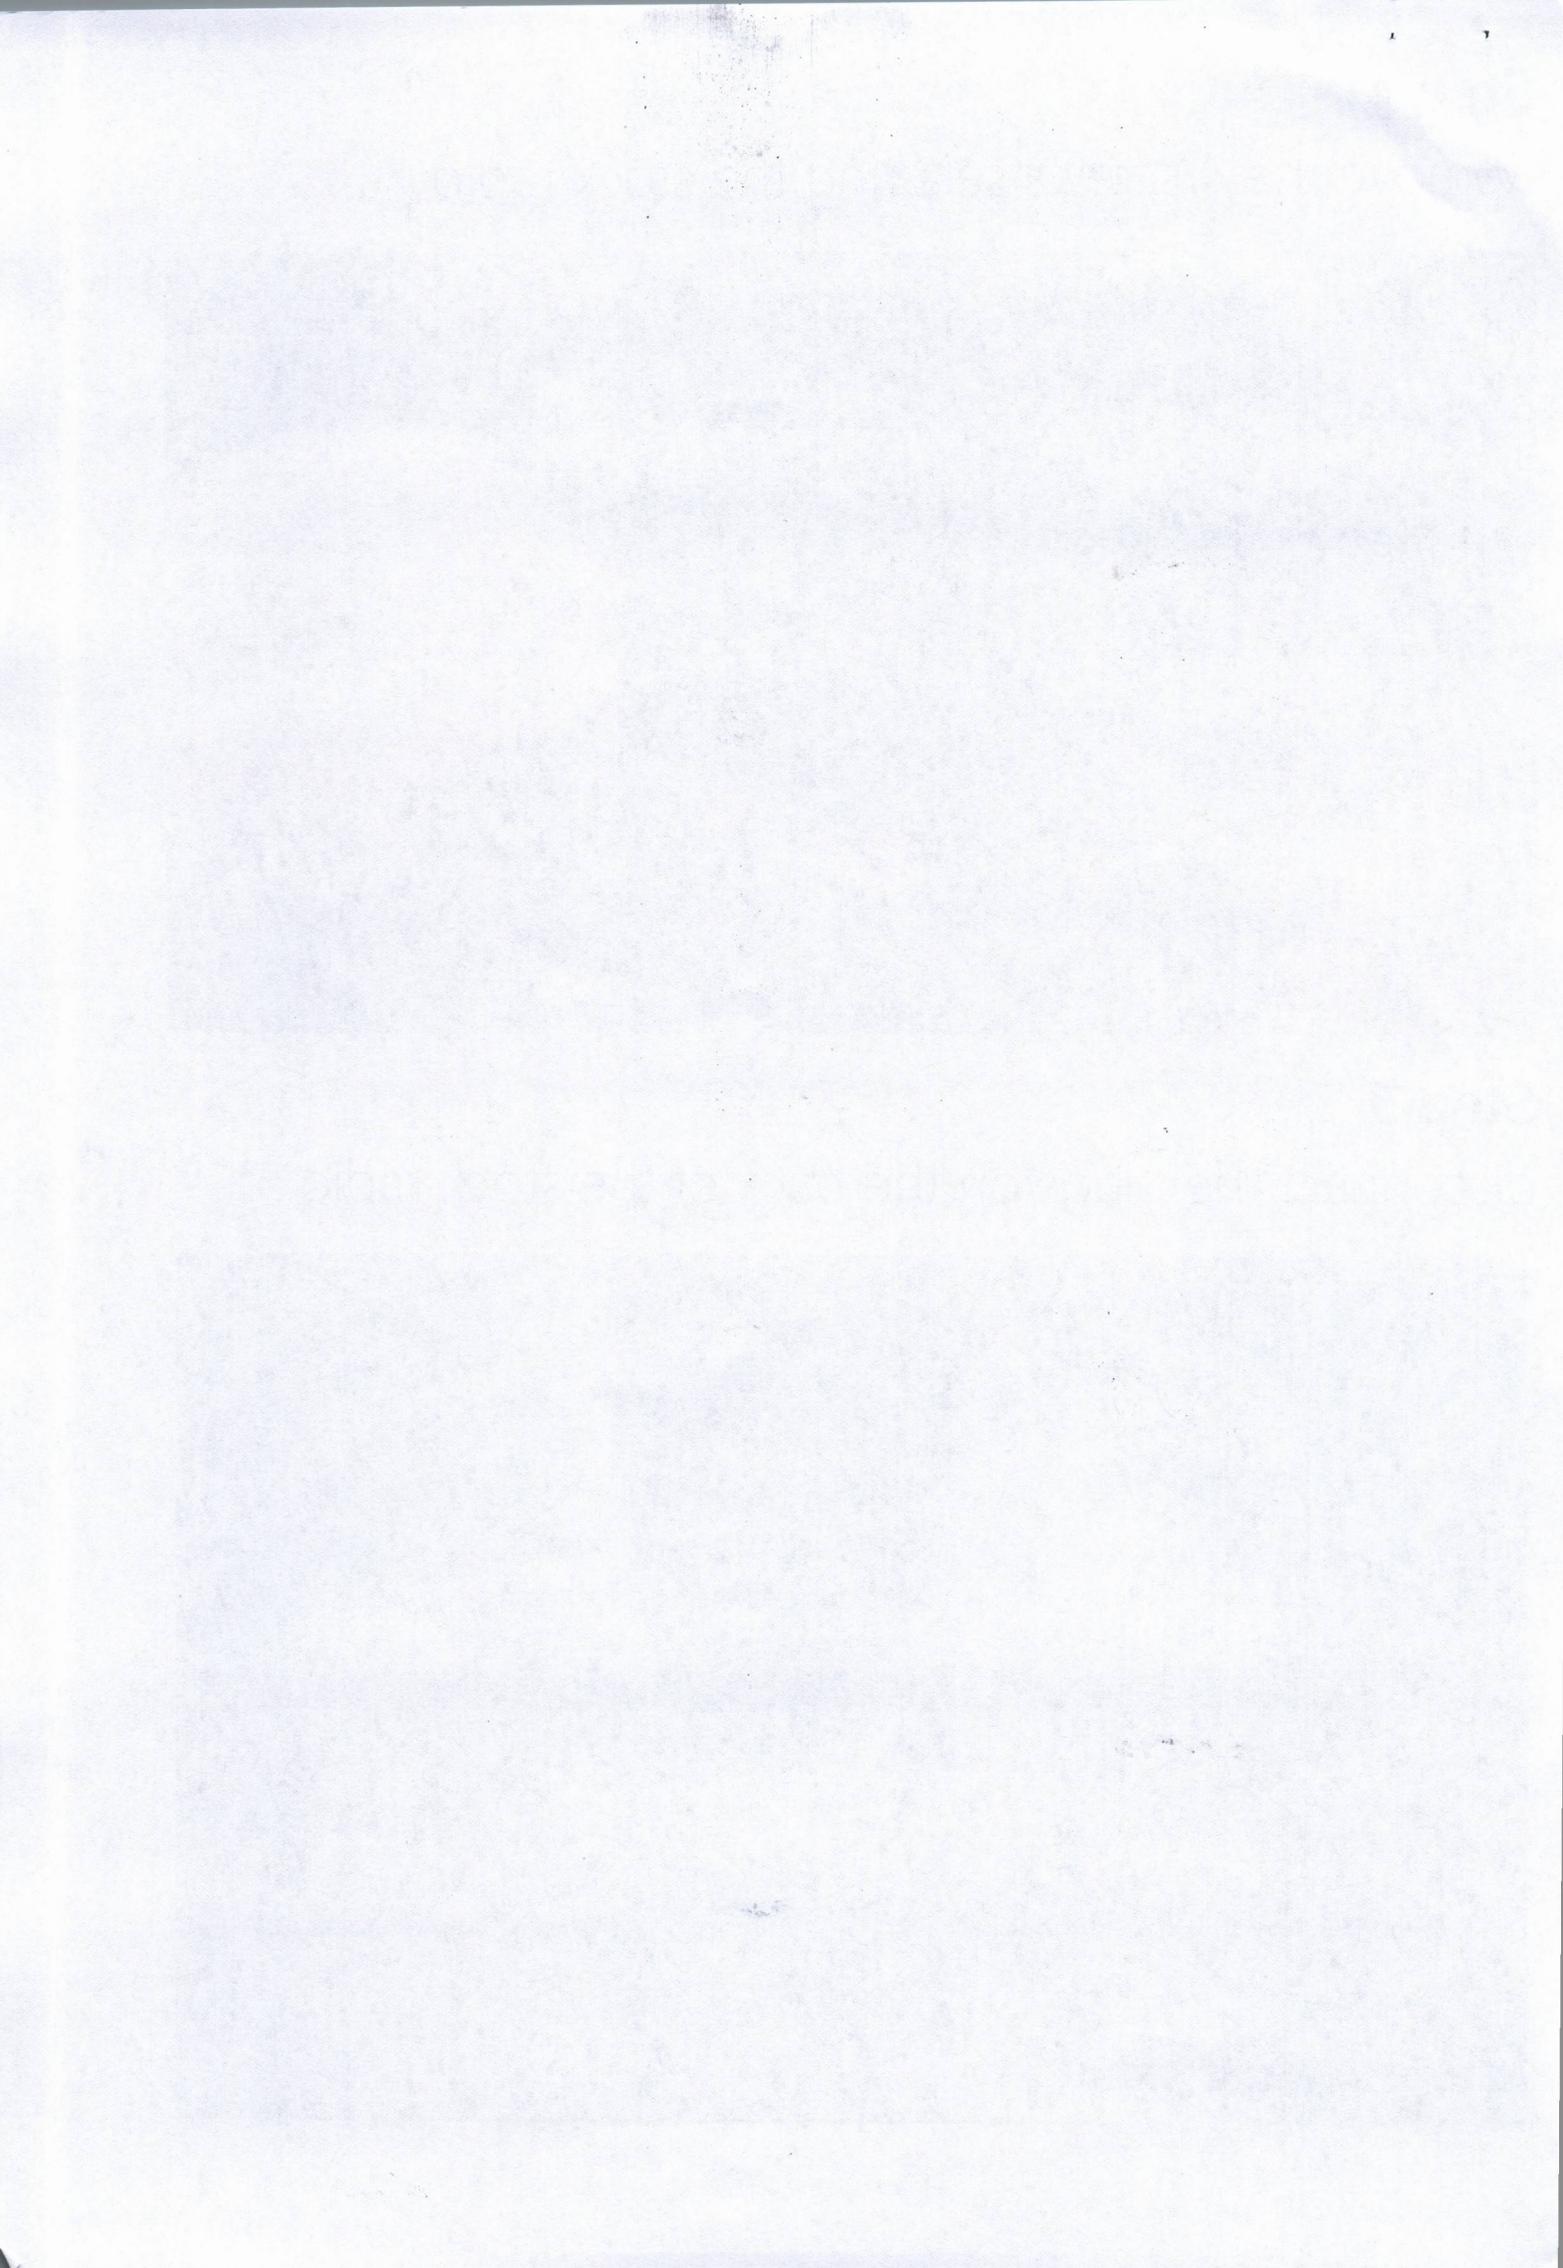

## Step 4


Remove the 4 screws securing the stock radio



## Step 5


disconnect the plugs on the back of the stock radio



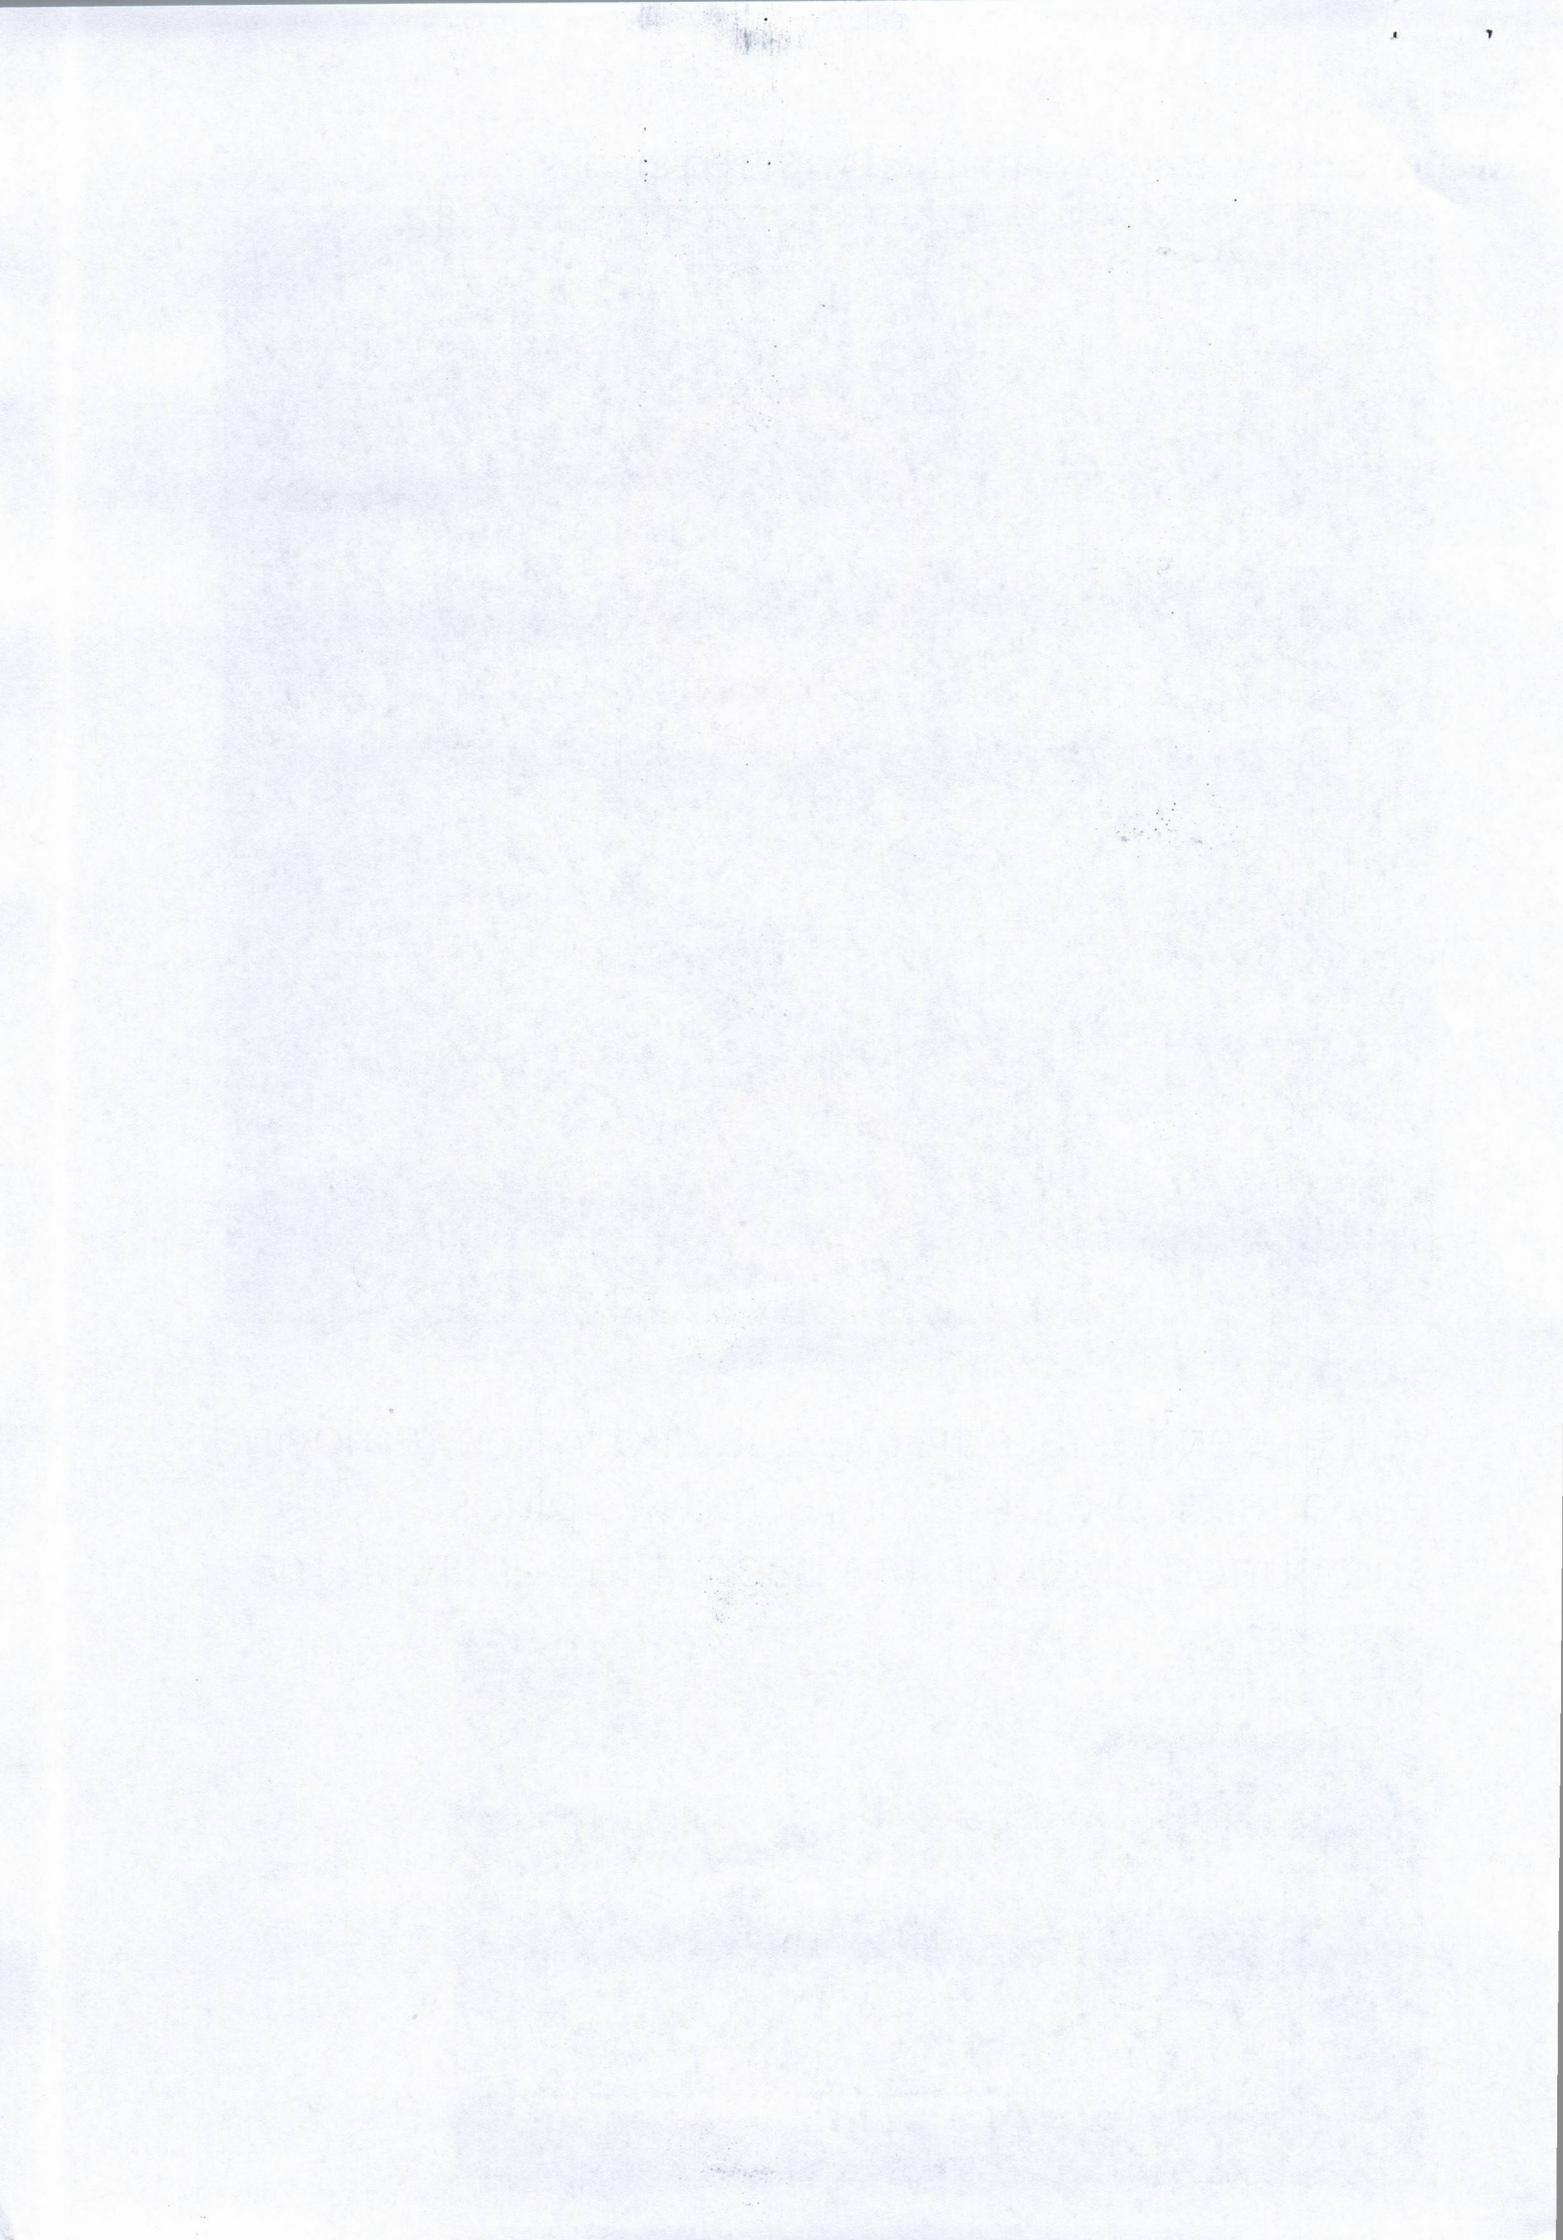

## Step 2

Remove the two screws marked with red circles

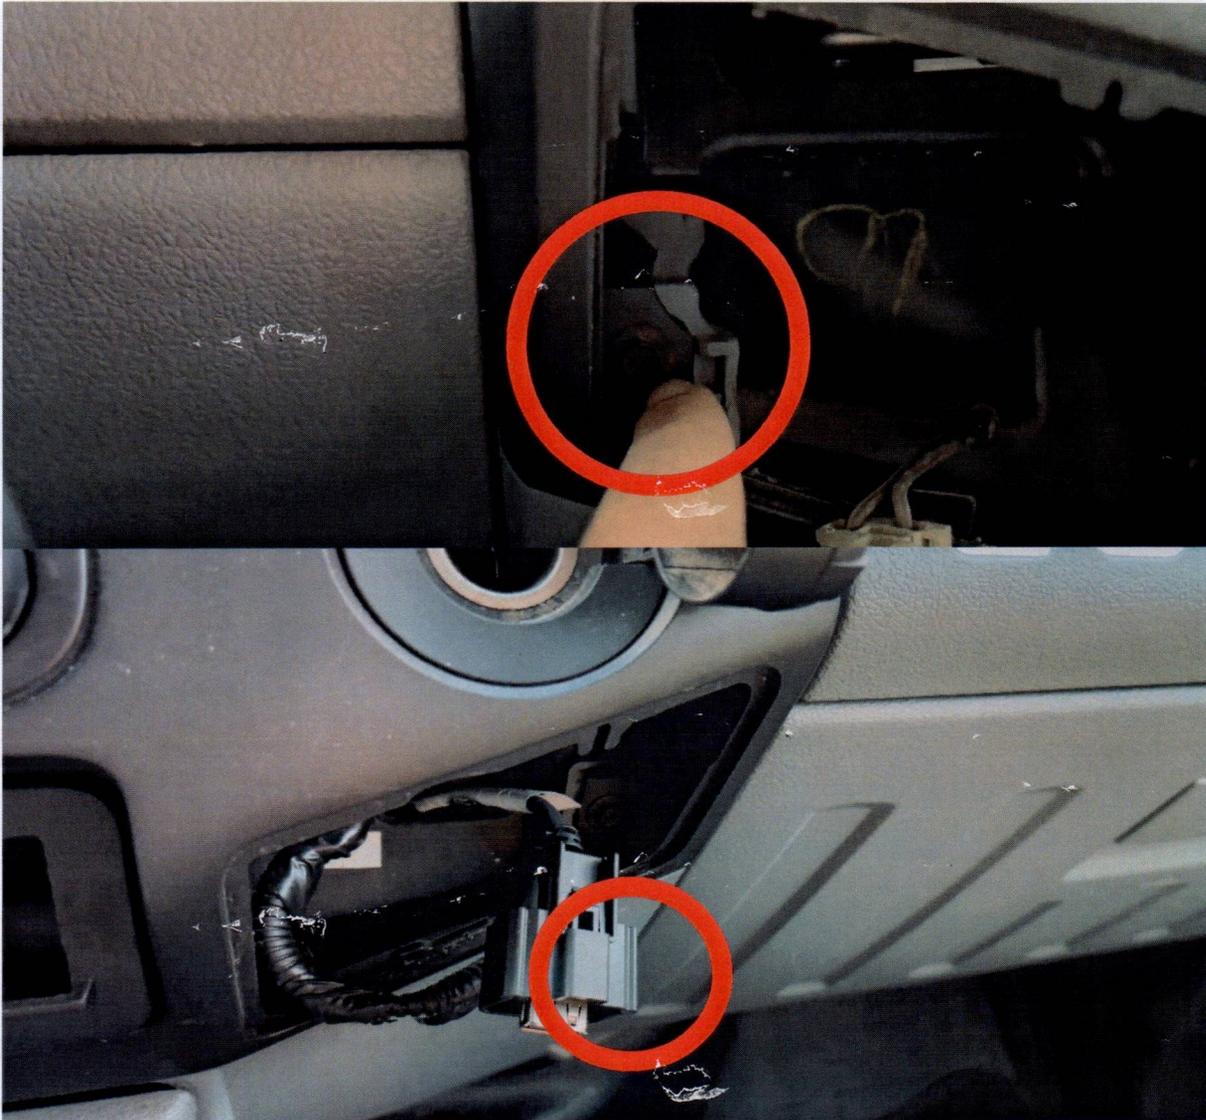

## Step 3

Pull the entire face frame outward. When removing, pay attention to the connected AC plugs and button plugs on the back of the entire frame





# F250 350 450 650 2010-2016 installation manual (Without SYNC system)

## How to remove the factory dashboard.

### Step 1

Remove cigarette lighter and AUX panel

