

FORD 2015-18 Front Seat Covers

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.

If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product. Check all fasteners for proper torque. Check to ensure for adequate clearance between all components. Periodically check all hardware for tightness.







INSTALLATION INSTRUCTONS


- 1. Seats were removed for photo purposes. This is not necessary but can be removed for installation.
- 2. If you are not removing the seats skip to step 6.
- 3. If you have chosen to remove the front seats remove the plastic trim covering the front and rear bolts in the seat frame using a small pry tool to release the cover. **See Photo 1 and 2**.



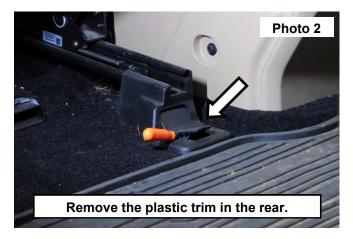


- 4. Remove the 4 bolts from the seat frame using a 13mm socket. See Photo 3.
- 5. Lean the seat rearward and disconnect the plugs under the seat. Then remove the seat. See Photo 4.





- 6. Installing the seat cover. Remove the headrest from the seat by pressing the button on the side of the adjustment tabs. Pull straight out of the top of the seat then set aside in a safe place for later use. **See Photo 5.**
- 7. Place the drivers side cover onto the seat from the top down, this one has a cutout for the airbag on the left side as shown. **See Photo 6.**







- 8. Insert the straps in between the back rest and the bottom of the seat. See Photo 7.
- 9. Pull the straps through the flap located at the back / rear bottom of the seat. See Photo 8.






Pull straps through the flap in the bottom of the seat.


- 10. Fold the bottom of the seat cover over the front edge of the bottom of the seat. See Photo 9.
- 11. Rout the 2 straps around the hardware of the bottom seat. Connect the buckles together for each strap front to back. Then pull the strap tightening the cover to the bottom of the seat. **See Photo 10.**






- 12. Tuck the seat covers behind the plastic trim of the seat, pulling the hooked straps tight and connecting them to the frame of the seat. **See Photo 11.**
- 13. Pull the back of the seat cover under the bottom of the seat and pull the hooked straps tight and connecting them to the frame of the seat. **See Photo 12 and 13.**



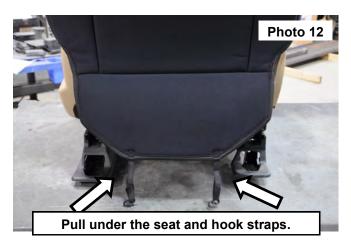



- 14. Install the headrest onto the top of the seat. Then install the cover using the Velcro to secure the cover on. **See Photo 14.**
- 15. Install the front seats if they were removed for the installation process at this time.

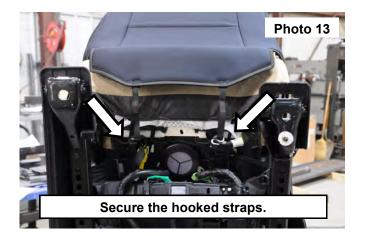



By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.



FORD 2015-20 F-150 Rear Seat Covers

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.

If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product. Check all fasteners for proper torque. Check to ensure for adequate clearance between all components. Periodically check all hardware for tightness.

KIT CONTENTS:






INSTALLATION INSTRUCTONS

- 1. Remove the 3 headrest on the rear seats. Press the release button and pull straight up. See Photo 1.
- 2. Fold the rear seat bottom up to gain assess to latch on rear seat. When the seat bottom is folded up the gap between the rear seat back and the cab allows easier access to the seat release.
- 3. Release driver side rear seat by pulling up on the release pin on the latch in-between back seat and cab of truck. **See Photo 2.** Lower seat bottom and fold seat back forward.






- 4. Install the rear backrest cover by sliding it over seat and tucking bottom in-between the seat. Adjust, pull tight and secure with Velcro. See Photo 3 and 4.
- 5. Raise the back of the seat up and connect the latch.





- 6. Install the bottom seat cover onto the seat. See Photo 5.
- 7. Secure using the straps front to rear of the bottom of the seat. Connect the buckles, adjust as needed and pull tight.
- 8. Connect the hooked strap to the far inner strap pulling the side and rear cover tight around the seat. See Photo 6.



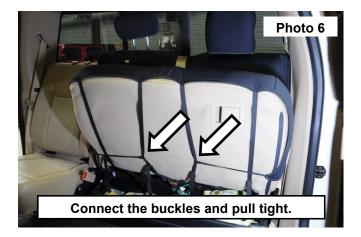



- 9. Install center foldout cover. See Photo 7.
- 10. Install the passengers side seat cover onto the seat as drivers side was installed. Adjust and secure with velco. **See Photo 8.**





- 11. Connect the buckles on the bottom of the seat. Adjust and pull tight. Connect the hooked straps together in the center of the seat. **See Photo 9.**
- 12. Install the headrest cover, secure the Velcro on the bottom of the cover. Then install into the seat. **See photos 10** and 11.





13. Check for fitment and for the straps to be tight and secured. Adjust as needed See Photo 12.







