




Installation Guide

Armor Grille
For 2002-2005 Dodge Ram 1500

SKU # AMDEBA00144 & AMDEBA00145

STEP 1

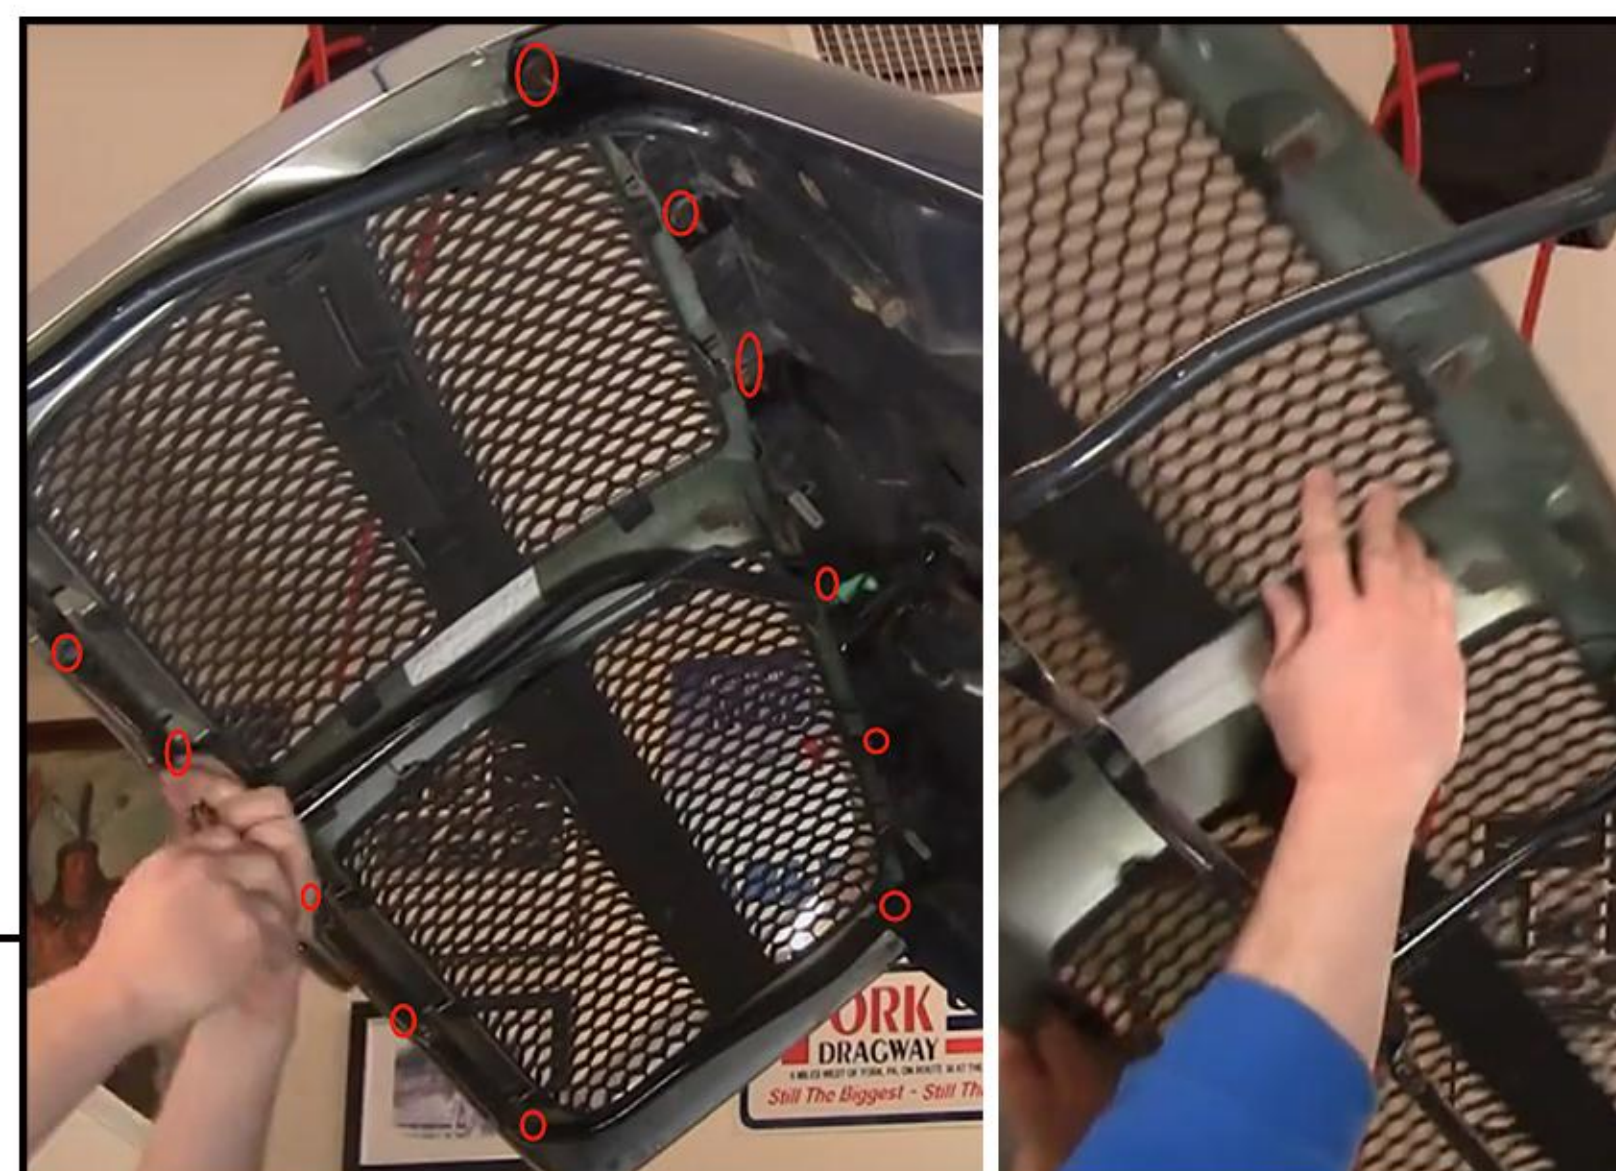


Open the hood,remove 12 bolts(6 on each side) with 8 mm socket ratchet to remove the old grille.

STEP 2




Remove all the metals from the plastic and metal nuts that are on the back with a pair of vice to save the nuts for the new grille.(You can clean the surface and put a coat of wax)

STEP 3

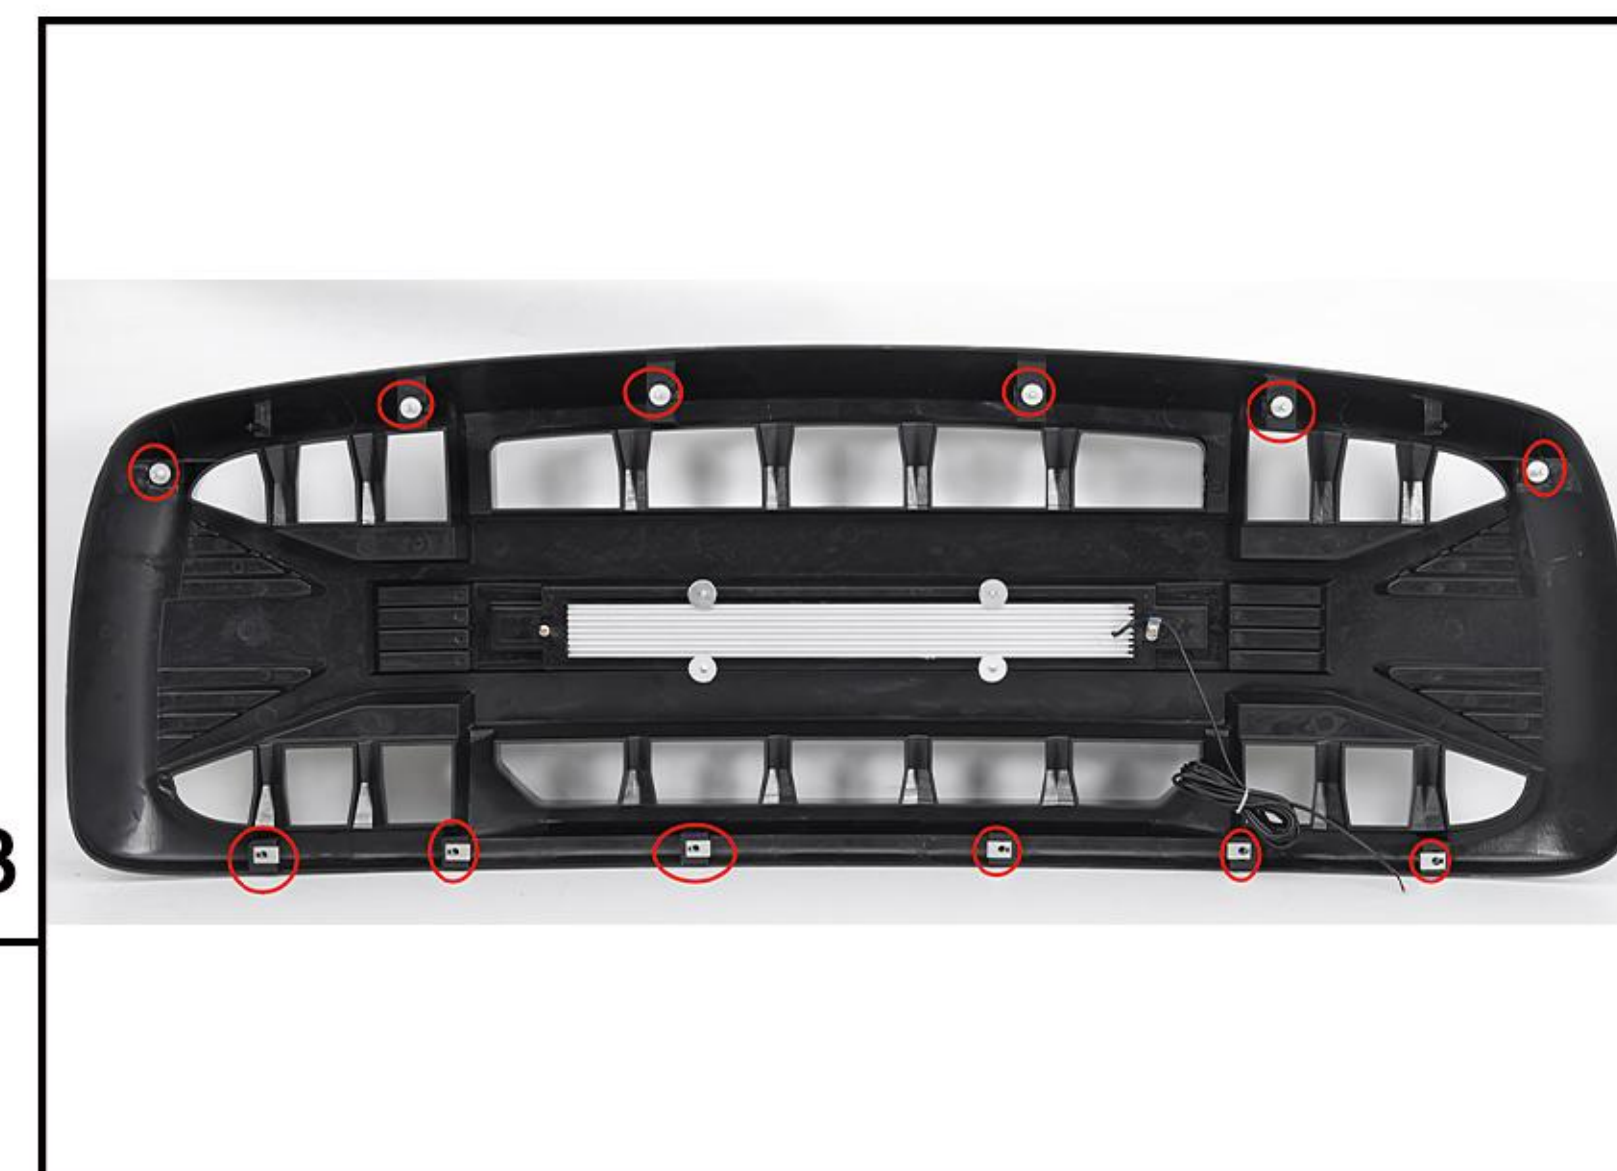

Align the top 6 screws on the back of the new grille and the bottom 6 metal clips (installed on the grille, not separately equipped with screws) with the holes on the body of the vehicle.

STEP 4

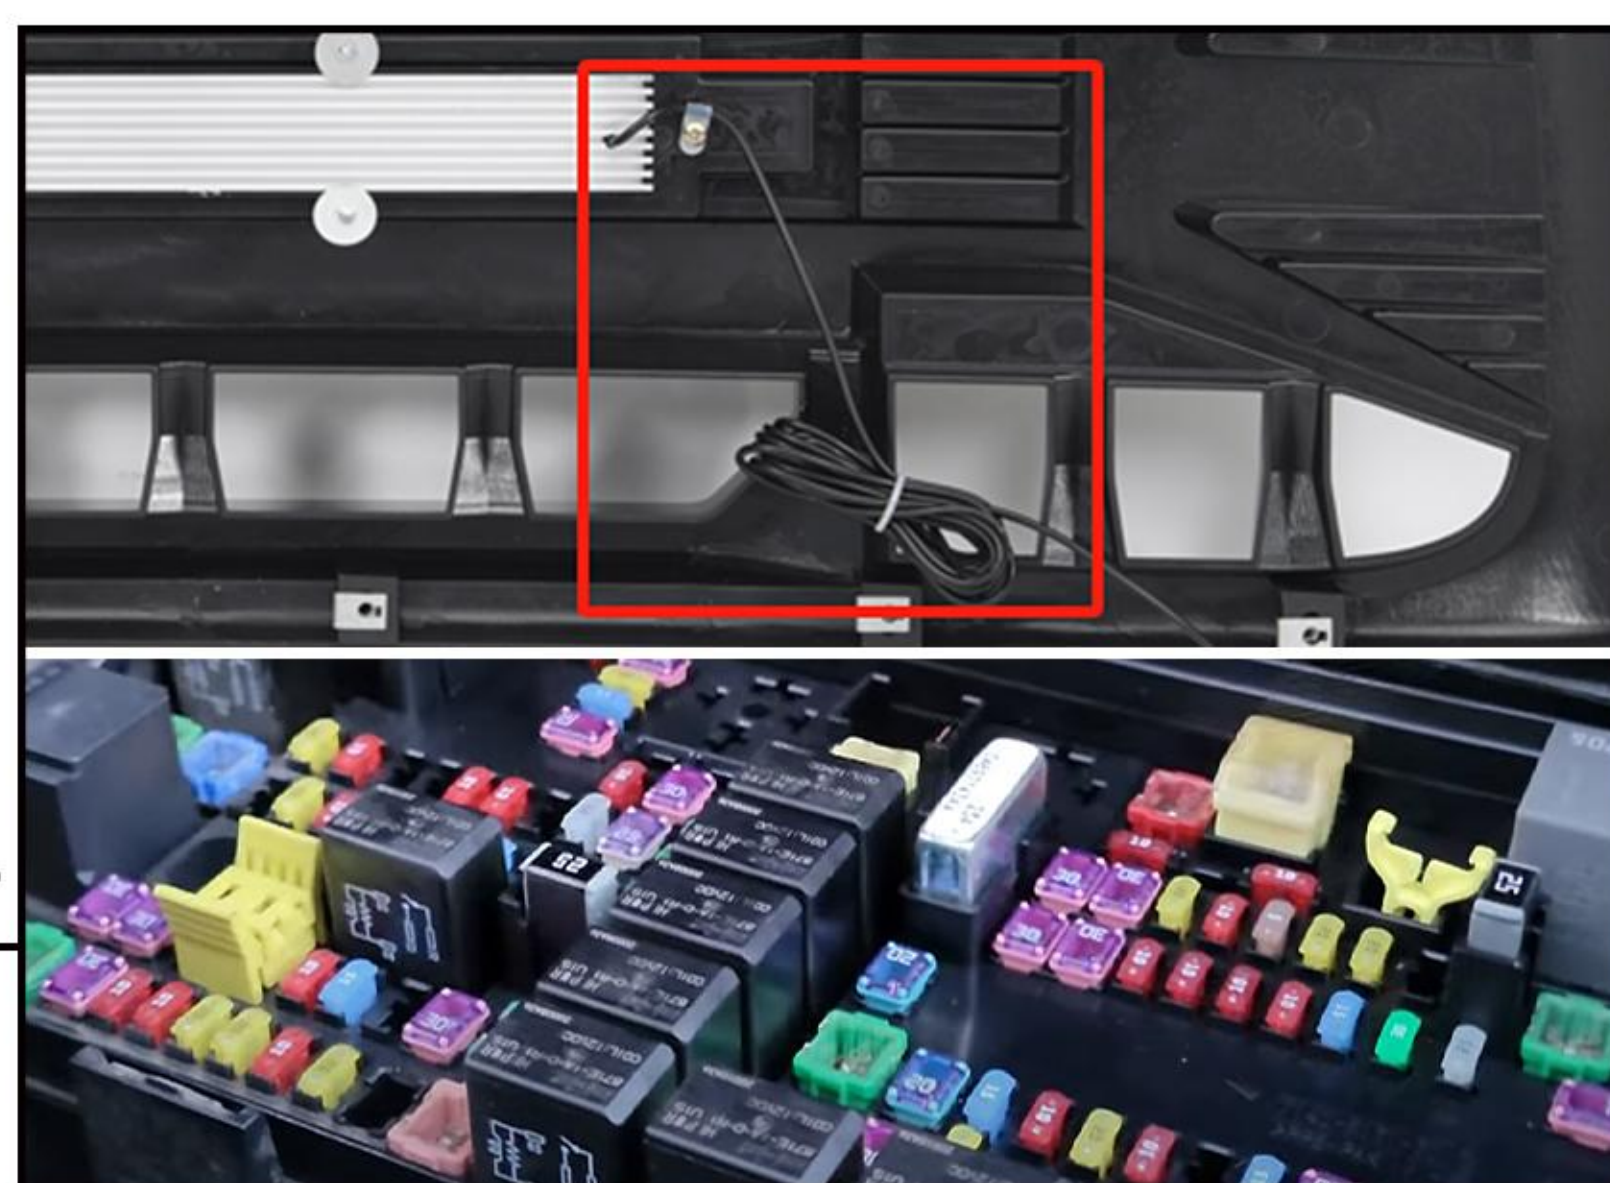

DRL Wiring:
Wire to fuse box,the red wire connects to the ACC, the black wire connects to the negative of battery.

STEP 5



Follow the step 1 in reverse order to complete the grille installation