




# Installation Guide

Armor Grille  
For 2002-2005 Dodge Ram 1500

SKU # AMDEBA00144 & AMDEBA00145

## STEP 1

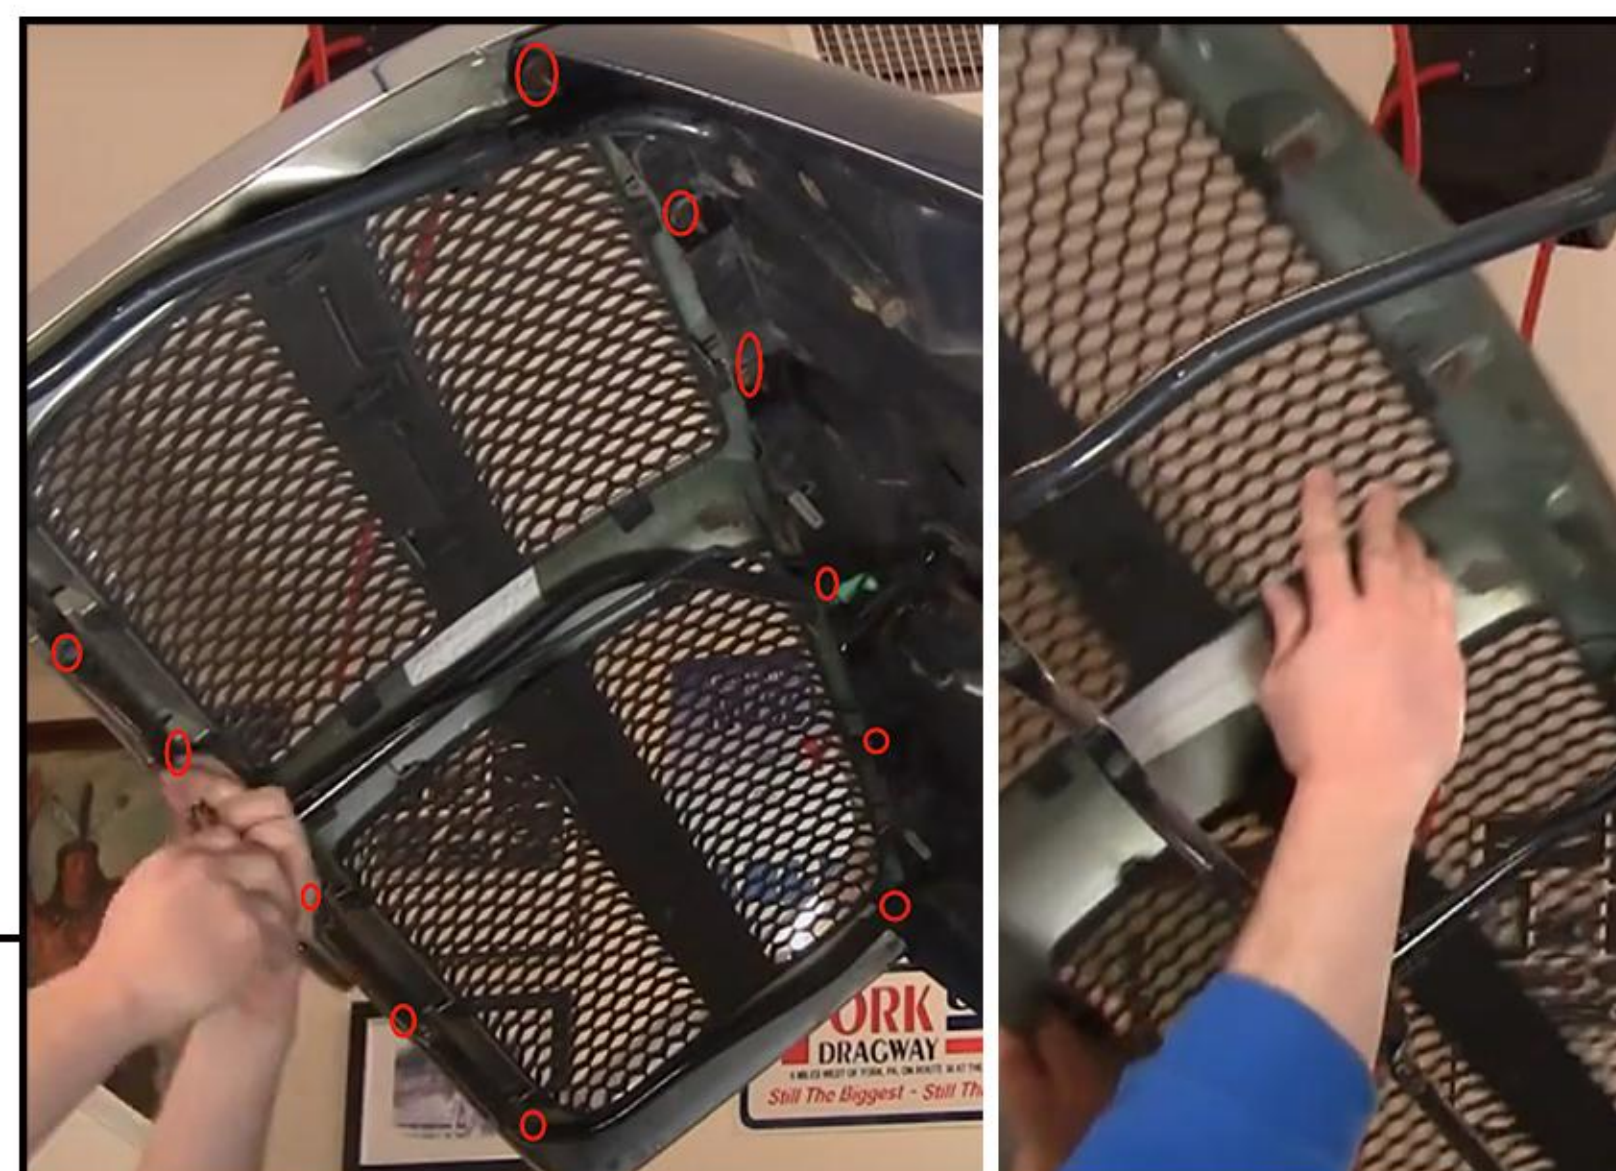


Open the hood,remove 12 bolts(6 on each side) with 8 mm socket ratchet to remove the old grille.

## STEP 2




Remove all the metals from the plastic and metal nuts that are on the back with a pair of vice to save the nuts for the new grille.(You can clean the surface and put a coat of wax)

## STEP 3

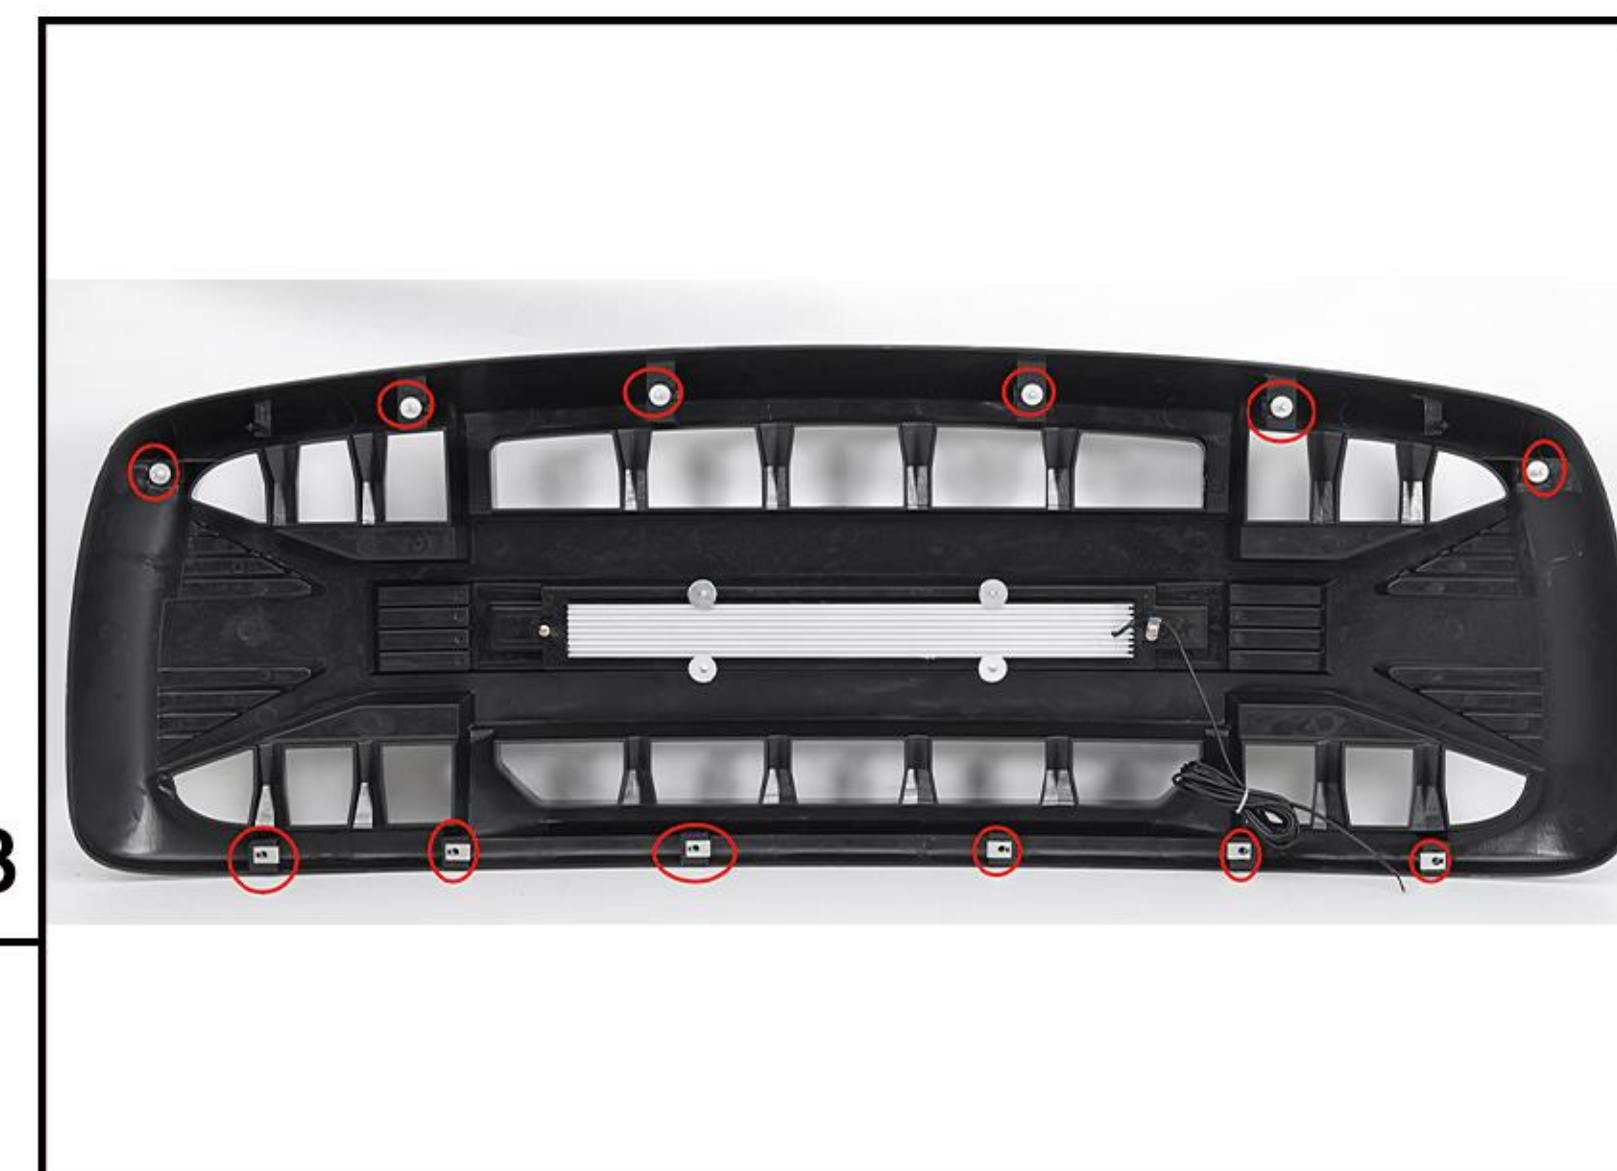

Align the top 6 screws on the back of the new grille and the bottom 6 metal clips (installed on the grille, not separately equipped with screws) with the holes on the body of the vehicle.

## STEP 4

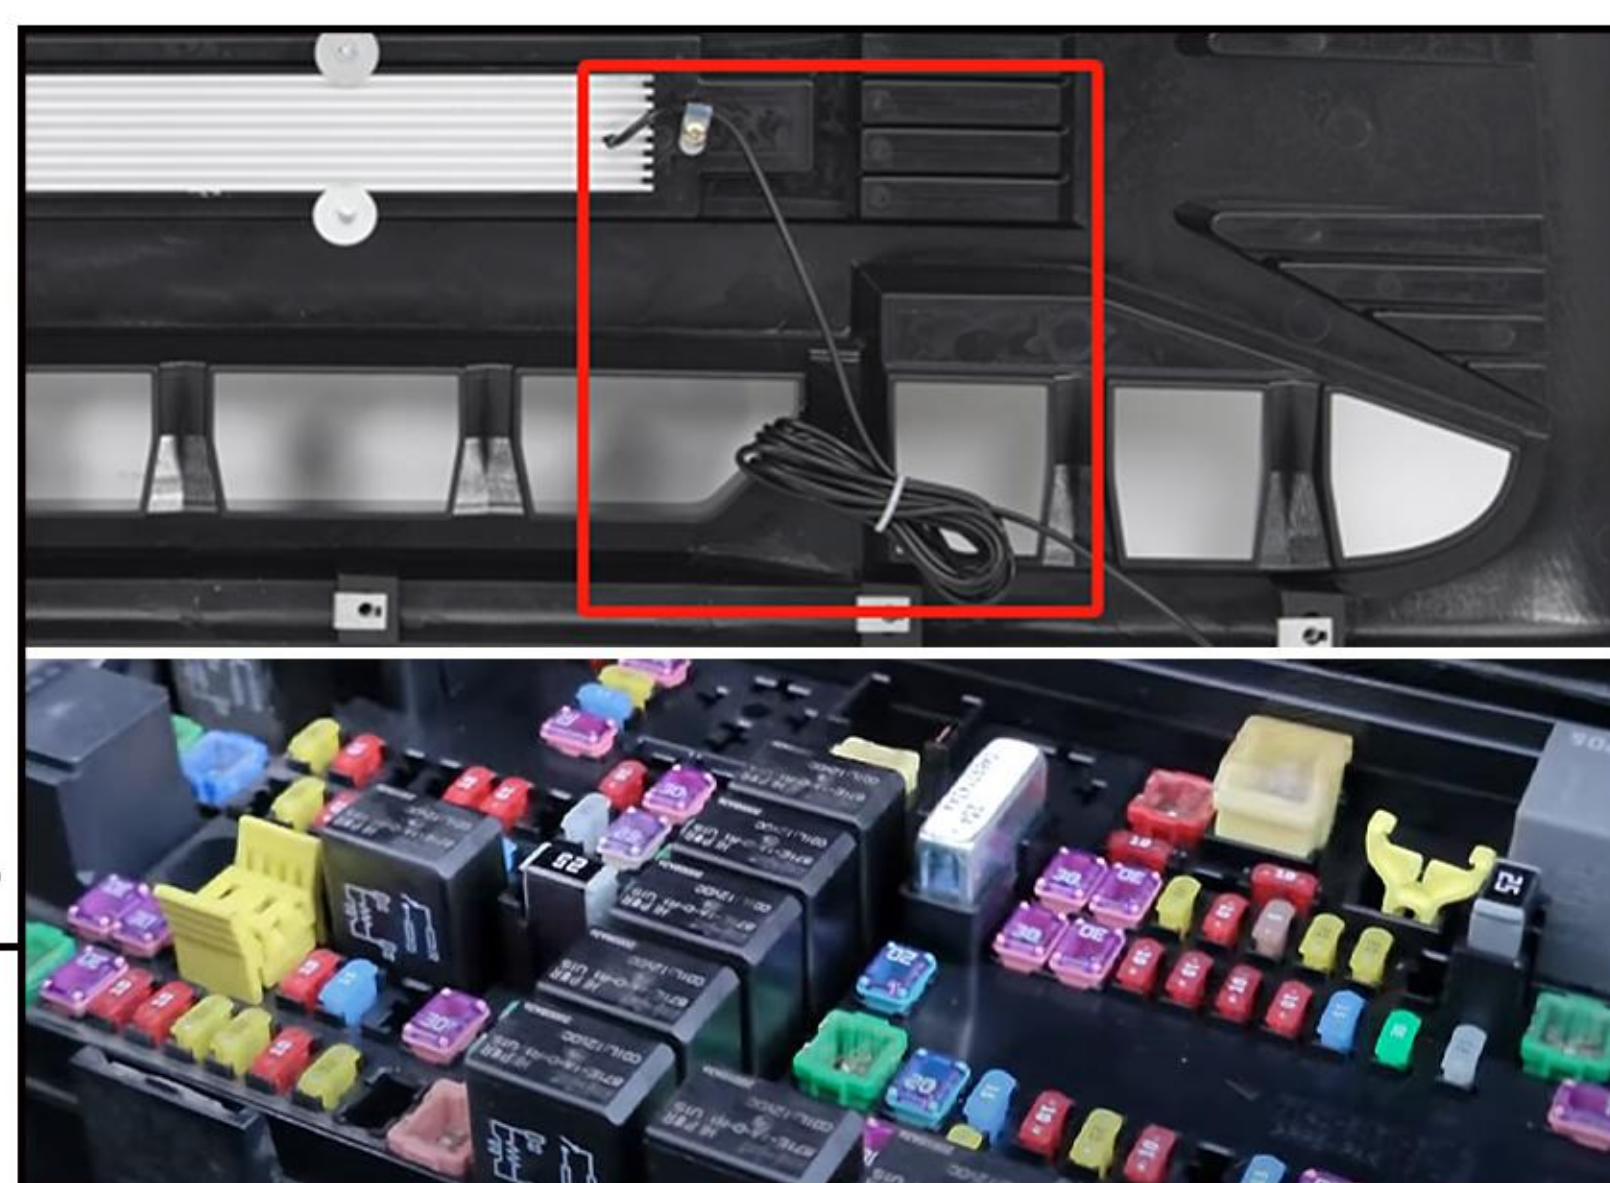

DRL Wiring:  
Wire to fuse box,the red wire connects to the ACC,  
the black wire connects to the negative of battery.

## STEP 5



Follow the step 1 in reverse order to complete the grille installation