




PPEpower.com

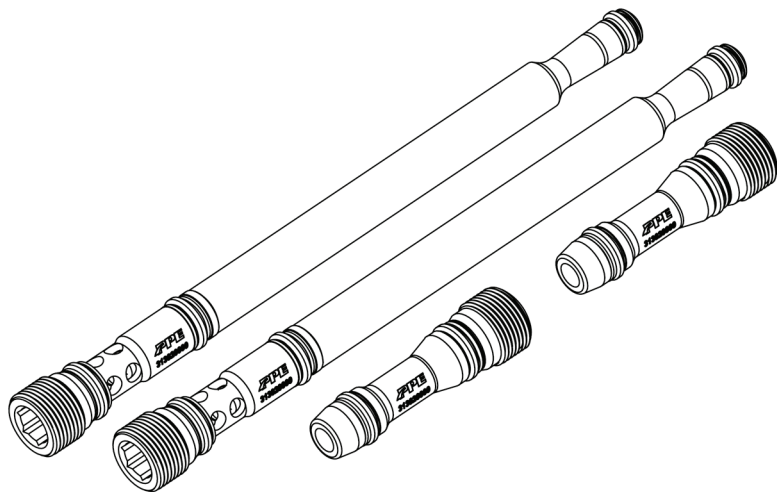

High Pressure Oil Standpipe and Rail Plug Kit


***2004.5-2007 Ford Power Stroke 6.0L Diesel
Super Duty***

2004.5-2010 Ford E-Series 6.0L Diesel Van

(313020000)

Installation Guide

High Pressure Oil Standpipe and Rail Plug Kit

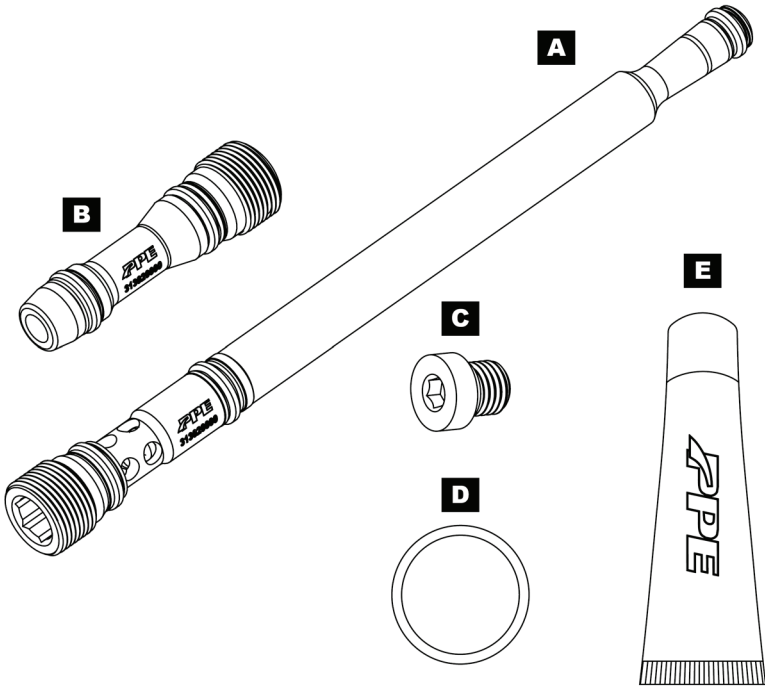

CONTENTS:

- A. (2) Standpipe
- B. (2) Dummy Plug
- C. (1) Fuel Injector Manifold Tube Plug
- D. (1) Crankcase vent valve seal
- E. (1) Lubricant

Prior to instillation, verify all o-rings and backup rings are present and in proper orientation as shown:



INSTALLATION:

Begin with the driver's side.

1. Remove the valve cover to gain access to the high-pressure oil rail. Remove the dummy plug followed by the standpipe.
2. Verify the seal is intact on the end of the pipe after removal, this will ensure no debris is left behind.
3. Remove the nine bolts securing the high-pressure oil rail and set it aside.
4. Separate the upper and lower portions of the new standpipe. Generously lubricate the seals and the upper internal walls of the tube with the supplied lubricant **(E)**. Insert the lower portion into the cylinder head tube, ensuring it contacts the branch tube port.

High Pressure Oil Standpipe and Rail Plug Kit

5. With the High-Pressure oil rail off, lubricate and install the supplied fuel injector manifold tube plug (C).
6. Reinstall the high-pressure oil rail, start all T-30 Torx bolts by hand, and torque each bolt to 10 lb-ft (120 in-lb) following the specified sequence. **(Fig. 1)**
7. Prepare the dummy plug for installation by generously lubricating its seals with the supplied lubricant (E), then torque to 60 lb-ft.
8. Generously apply lubricant (E) to the seals on the upper portion of the standpipe, then torque to 60 lb-ft. This will secure the upper and lower portions together and finalize the seal in the branch tube port.
9. Replace the crankcase vent valve seal with the one supplied in the kit. **(D)**
10. Repeat the same removal and installation steps for the passenger side, except the fuel injector manifold tube plug and crankcase vent valve seal.

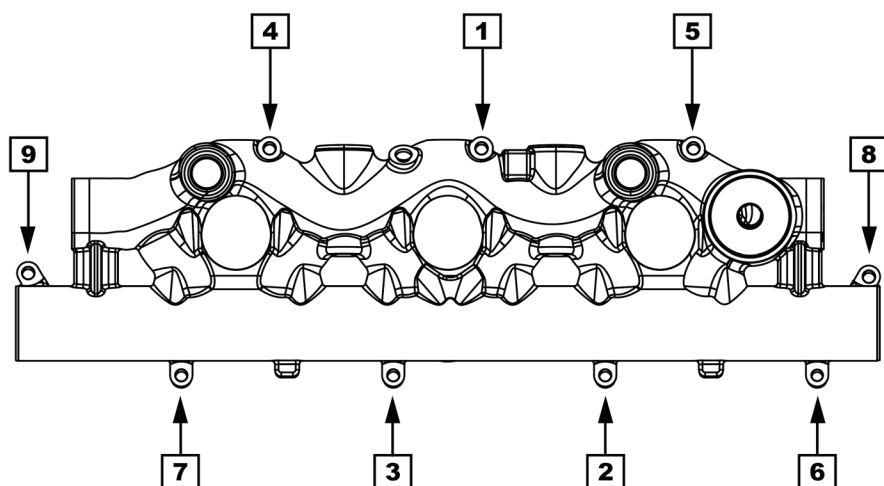


Fig. 1

Installation Complete

DISCLAIMER OF LIABILITY

Performance products can increase horsepower above and beyond factory specifications. Additional horsepower creates more stress on the drive-train components, which could result in drive-train failure.

Note regarding emissions-related, non-E.O.-legal products: THESE PRODUCTS ARE LEGAL IN CALIFORNIA ONLY FOR RACING VEHICLES THAT MAY NEVER BE USED, OR REGISTERED OR LICENSED FOR HIGHWAY OR OFF-ROAD USE.

This agreement sets forth the terms and conditions for the use of PPE products. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions. PPE (Pacific Performance Engineering) Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for the product's proper use and service. The buyer hereby waives all liability claims. The Buyer hereby acknowledges no reliance on the Seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence. The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment. The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer. The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer.

Limited lifetime warranty on all PPE cast aluminum products, and PPE Transmission Coolers. Three (3) year limited warranty on PPE Manifolds and Up-Pipes Kits, and OEM-Length Up-Pipes. One (1) year limited warranty on all other PPE products from the date of sale to original buyer and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller. Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or re-installation - of this product or any other contingent expenses. Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund. The installation of this product indicates that the buyer has read and understands this agreement and accepts its terms and conditions.



PPEpower.com