



PROJECTOR HEADLIGHTS

(2009-2014 F-150 - WITH HALOGEN HEADLIGHTS)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Headlight
(1) RH Headlight

TOOLS REQUIRED

10mm Socket
Ratchet
Needle Nose Pliers

STEP 1




Open the hood. Remove (3) 10mm bolts from the headlight assembly.

STEP 2



Firmly pull the headlight away from the vehicle to dislodge the alignment clips. Unplug (3) electrical connectors from the back-side of the headlight.

STEP 3

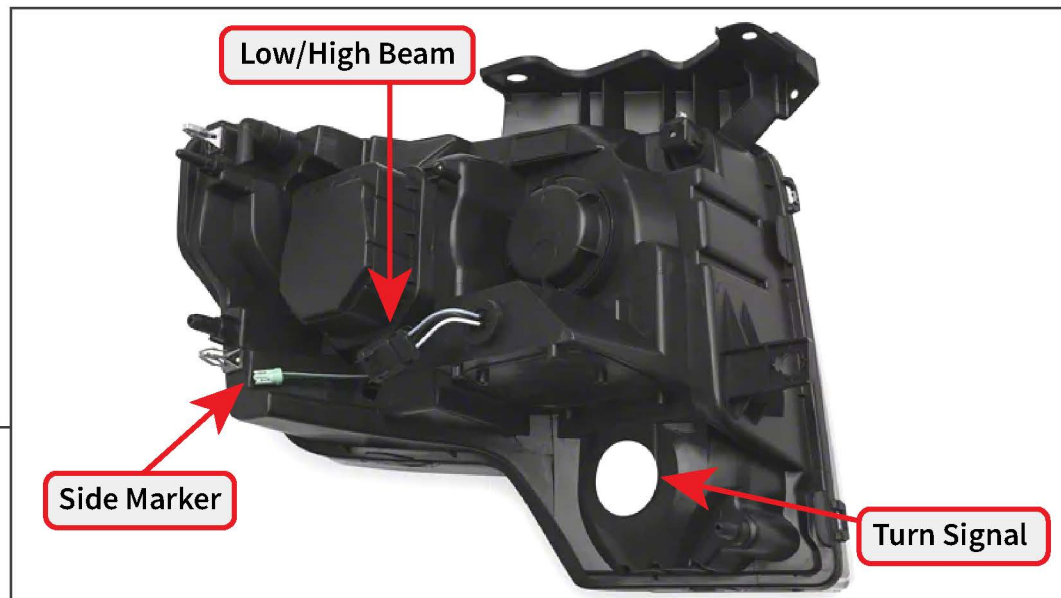

- Twist to remove the vehicle turn signal socket from the OEM light housing, and transfer to the new headlight assembly. Twist clockwise to lock into place.
- Twist to remove the vehicle side marker socket from the OEM light housing, and remove the bulb. Plug in the new headlight sidemarker harness into the vehicle bulb socket. **Note: Ensure the black wire on the headlight harness is in line to the black wire on the vehicle harness when plugged in.** Twist clockwise to lock into place.
- Plug in the vehicle low/high beam harness into the headlight housing directly.

STEP 4



Test lighting functionality. If the side marker lights do not work, unplug the side marker bulb socket from the vehicle socket, turn the harness 180 degrees, and re-install into the vehicle socket and test.

Install the headlight into the vehicle re-using the original hardware. Repeat Steps 1-4 to the opposite side of the vehicle.

Installation is now complete.