

LED TAIL LIGHTS

(2015-2020 F-150 EXCLUDING BLISS EQUIPPED VEHICLES)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Left Hand Tail Light
- (1) Right Hand Tail Light
- (2) Adapter Harnesses

TOOLS REQUIRED


Soft Pry Tool 8mm Socket and Ratchet





STEP 1

Begin by opening the tail gate to access the (2) fasteners that secure the tail light to the vehicle. Using a 8mm socket, remove the (2) fasteners. Then firmly pull the tail light rearward away from the vehicle.

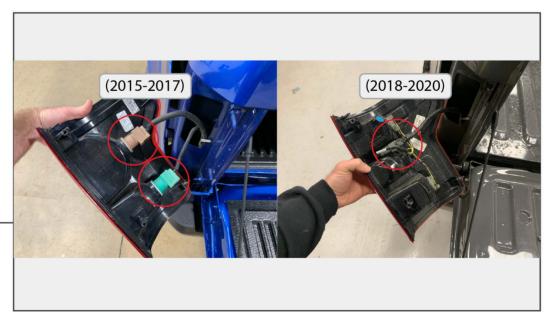

STEP 2

(2015-2017) - Remove the (2) connectors by depressing the clip and pulling the plug away from the light.


(2018-2020) - Remove the (1) connector by depressing the clip and pulling the plug away from the light.





STEP 3

Once the tail lights are removed, ensure the locating pin bushings are still connected to the vehicle. If they are not, remove them from the factory tail light and press them back into the vehicle.

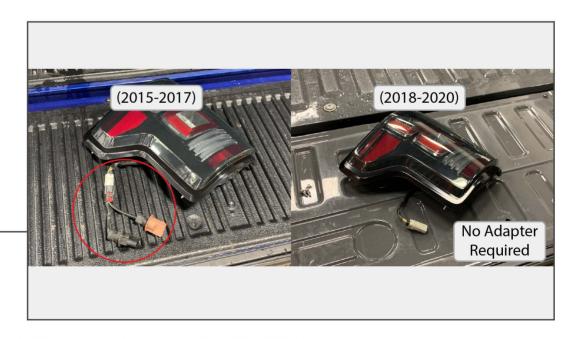


STEP 4

(2015-2017) - Install the adapter harness on the LED tail light.

(2018-2020) - Discard the adapter harness, it is not needed for the installation.



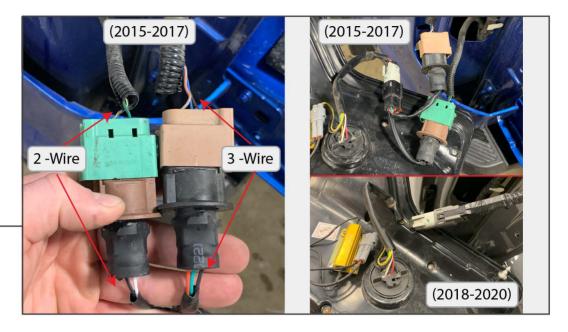

STEP 5

(2015-2017) - Connect the factory plugs to the adapter harness. The Brown connector with (2) wires connects to the factory Green Plug. The Black connector with (3) wires connects to the factory Brown plug. **Note: The light will not function correctly if installed backwards. Then connect the adapter harness to the vehicle.

(2018-2020) - Plug the factory connector into the LED light.



STEP 6

Test lights for functionality prior to re-installing the factory fasteners. Then re-install the (2) 8mm fasteners to complete the installation.