



SEQUENTIAL LED SIDE MIRROR MARKER LIGHTS

(2015-2018 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Left LED Light
(1) Right LED Light

TOOLS REQUIRED

T15 Torx Driver



STEP 1

Begin by firmly pulling the mirror glass up and away from the mirror. The mirror glass is held on by plastic clips and will come off with a firm pull.



STEP 2

If equipped with heated mirrors, disconnect the (2) wires attached to the back of the mirror. In some cases, these will be tight and by require a flat blade screw driver to get some leverage on the terminals.




STEP 3

Using a T15 Torx driver, remove the (4) screws holding the mirror shell together.




STEP 4

With the screws removed, pull the front portion of the mirror away from the vehicle.

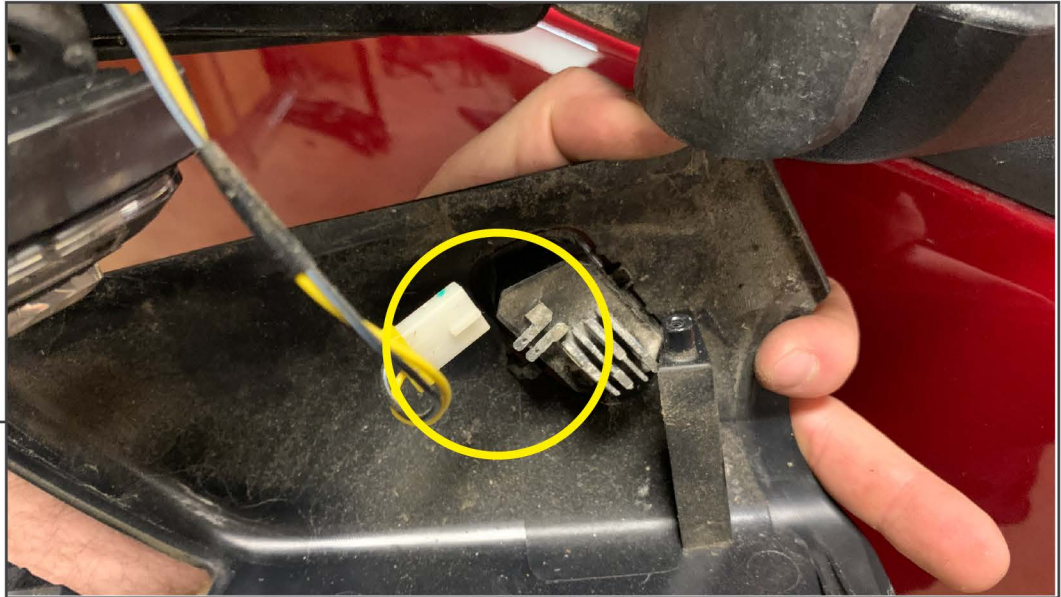

STEP 5

Unplug the puddle light from the front portion of the mirror.

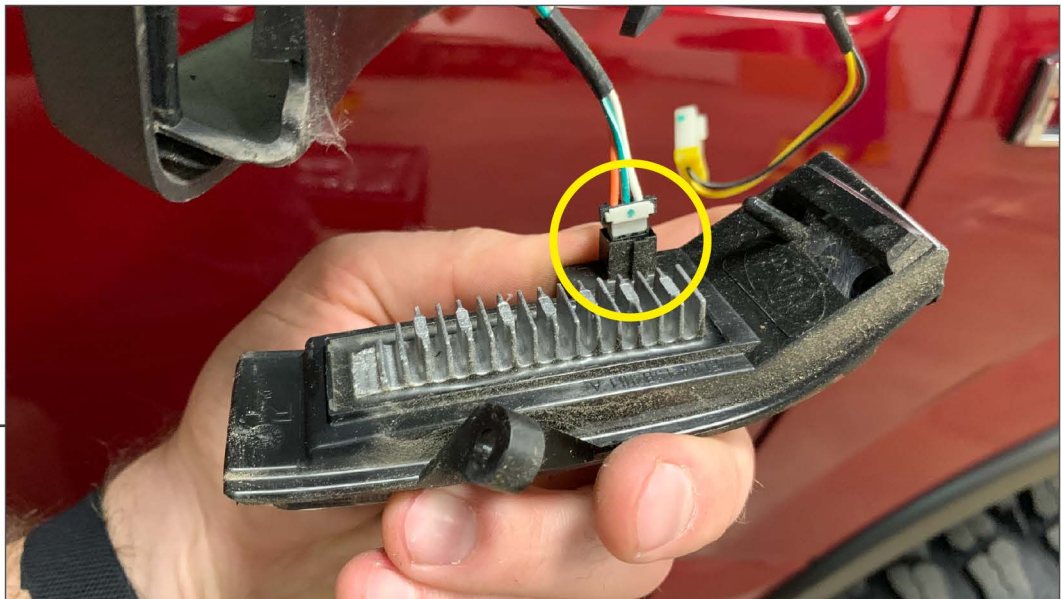

STEP 6

Unplug the factory turn signal.



STEP 7

Plug the factory wiring harness into the Sequential LED Turn Signal and line it up with the housing. Note the locating pin does fit in the factory location. The pin sits below the bracket on the LED light.



STEP 8

Reinstall the mirror by following Steps 1-5 in reverse order. Installation is now complete.