



PROJECTOR HEADLIGHTS

(2009-2014 F-150 - WITH HALOGEN HEADLIGHTS)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Headlight
(1) RH Headlight

TOOLS REQUIRED

10mm Socket
Ratchet
Needle Nose Pliers

STEP 1




Open the hood. Remove (3) 10mm bolts from the headlight assembly.

STEP 2



Firmly pull the headlight away from the vehicle to dislodge the alignment clips. Unplug (3) electrical connectors from the back-side of the headlight.

STEP 3

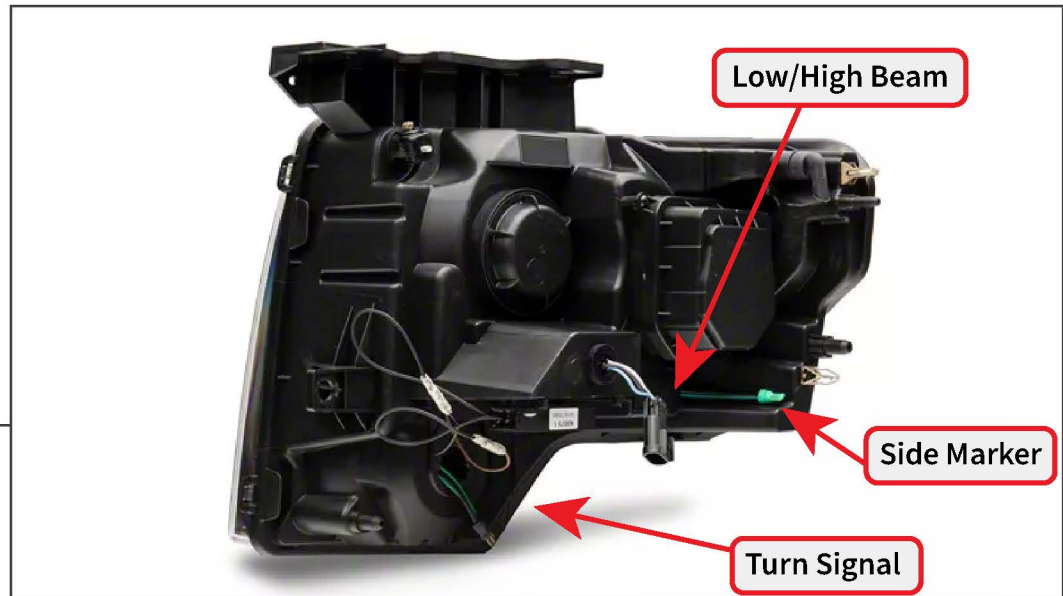

-Twist to remove the vehicle side marker socket and the turn signal socket from the OEM light housing, and remove the bulbs. Plug in the new headlight side marker and turn signal harness into the vehicle bulb socket. **Note: The lights are polarized, if the lights do not initially function, unplug the harness, turn the harness 180 degrees, and plug in the harness and test.**

-Plug in the vehicle low/high beam harness into the headlight housing directly.

STEP 4



Test lighting functionality. If the side marker / turn signal lights do not work, unplug the bulb socket from the vehicle socket, turn the harness 180 degrees, and re-install into the vehicle socket and test.

Install the headlight into the vehicle re-using the original hardware. Repeat Steps 1-4 to the opposite side of the vehicle.

Installation is now complete.