



---

# PREMIUM NEOPRENE SEAT COVERS

(2015+ F-150 WITH BUCKET SEATS) 

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) Set of Front Seat Covers
- (1) Set of Rear Seat Covers

### TOOLS REQUIRED


---

N/A



**STEP 1  
(FRONT)**

Remove the head rest from the seat by pressing in the two tabs where the head rest posts meet the seat while lifting up.

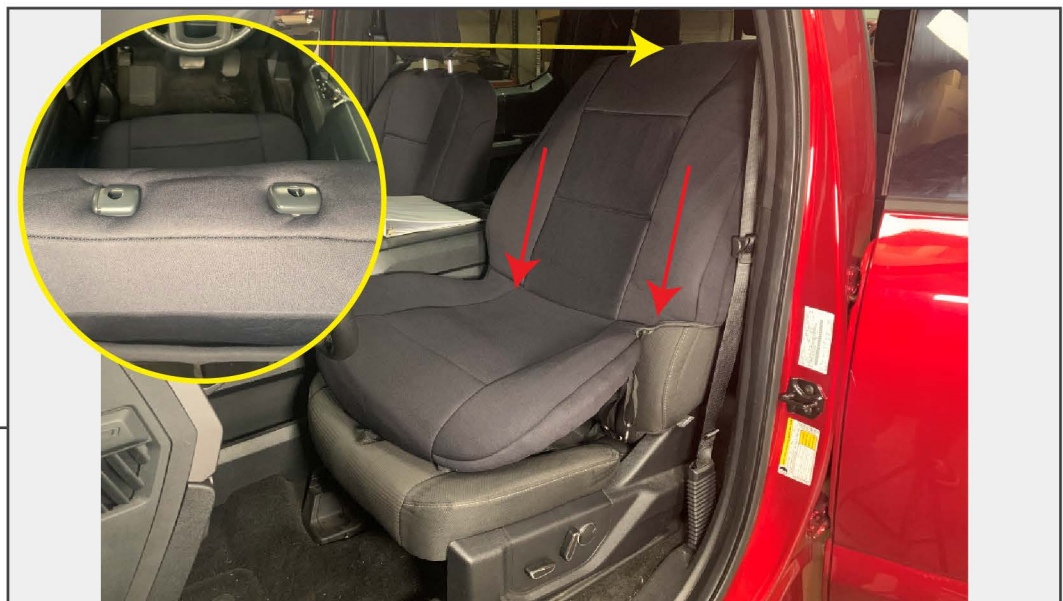

**STEP 2**


Pull the seat cover over the back rest of the seat. Tuck the head rest holes on the cover under the head rest tabs.

Note: Be sure the airbag cut out is facing towards the exterior of the vehicle.



**STEP 3**

Tuck the (3) straps along the inside of the seat cover between the seat cushion and back rest.

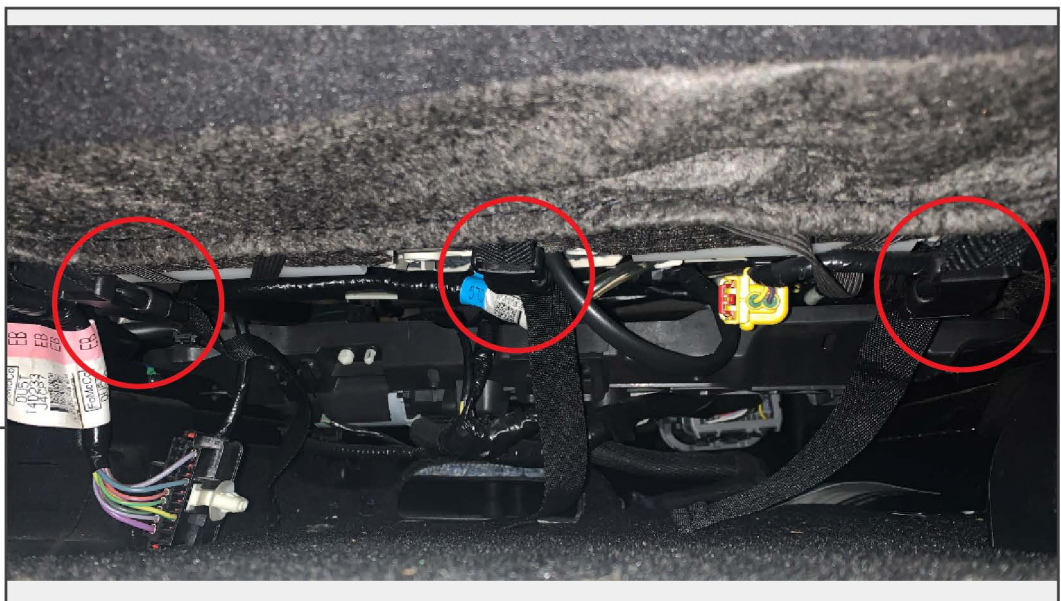

**STEP 4**

Align the lower seat cushion section of the cover onto the vehicle lower seat cushion. Using the (3) attached straps, connect the lower seat cushion straps to the previously tucked straps under the seat. Tighten until the seat cover is tight to the seat cushion.



**STEP 5**

Attach the elastic straps around the edges of the seat cover to a solid mounting point under the seat.



**STEP 6**

Slip the head rest cover over the head rest. Using the Velcro along the bottom to secure the cover to the head rest. Re-install the head rest onto the seat.



**STEP 7  
(REAR)**

Remove the head rest from the rear seat by pressing in the two tabs where the head rest posts meet the seat. Fold the back rest of the seat down.

Note: Passenger side uses a pull tab on the side of back rest. Driver side requires a 1/2" wrench to pull the post up from behind the back rest to dislodge the back rest latch.



**STEP 8**

Pull the seat cover over the back rest of the seat. Tuck the felt portion along the bottom of the seat cover in between the lower seat cushion and the back rest.

**STEP 9**



Using the previously tucked felt, pull tight evenly and secure to the back of the back rest using the attached Velcro on the back rest.

**STEP 10**



Place the lower seat cushion cover onto the rear seat. Using the provided straps, secure the lower seat cushion cover to the seat. Tighten until secure.



---

**STEP 11**

Slip the rear seat head rest cover over the head rest, then re-install the head rests onto the seat.

Installation is now complete.