



---

# LED HEADLIGHTS

(2018-2020 F-150 - WITH OEM HALOGEN HEADLIGHTS)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---


- (1) Pair of LED Headlights
- (2) Adapter Harnesses
- (1) DRL Wiring Harness

### TOOLS REQUIRED

---

- Panel Removal Tool
- 7mm, 8mm, 10mm Sockets
- T-25 Torx Socket
- Socket Wrench

**STEP 1**

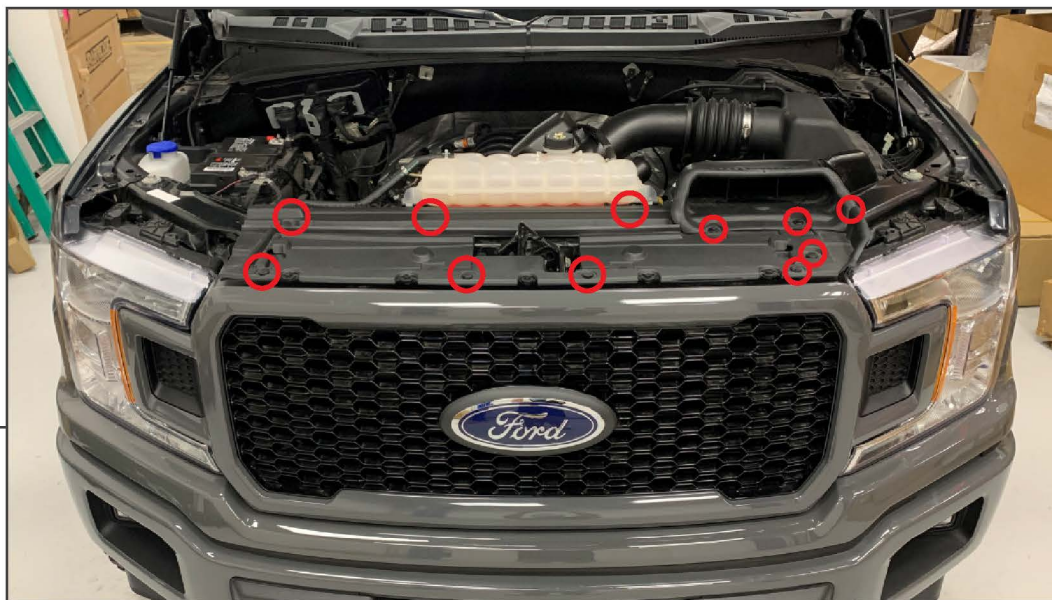


Remove (11) push clips from the upper splash shield. Remove upper splash shield from vehicle.

**STEP 2**



Remove (4) 10mm bolts from the top of the grille.

**STEP 3**

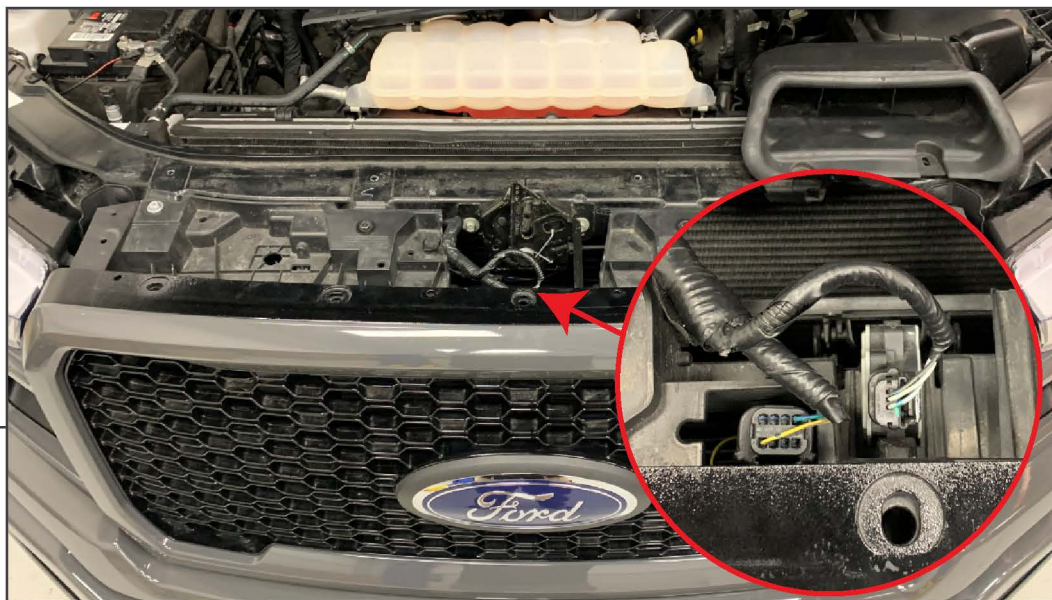

Unplug the (2) electrical connectors from the top of the grille by pushing in the plastic tab on each connector.

**STEP 4**



Remove (2) 7mm bolts from inside the fender well. Repeat this procedure to the opposite side.



---

**STEP 5**



Firmly pull the trim panel away from the vehicle to dislodge the clips. Repeat this procedure to the opposite side. Remove the trim panel from the vehicle.


---

**STEP 6**




Remove (2) 8mm bolts from the bottom of the grille assembly. Remove the grille assembly from the vehicle.

## STEP 7

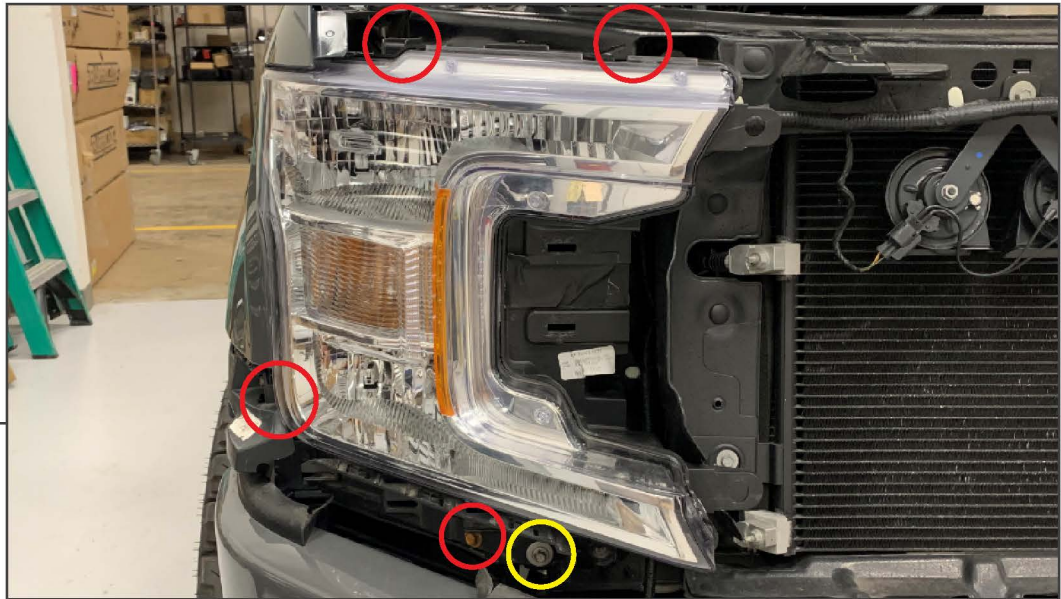


Remove (4) 10mm bolts, and (1) 8mm bolt from the headlight assembly. Remove and unplug the connectors from the headlight assembly. Repeat this procedure to the opposite side.

## STEP 8

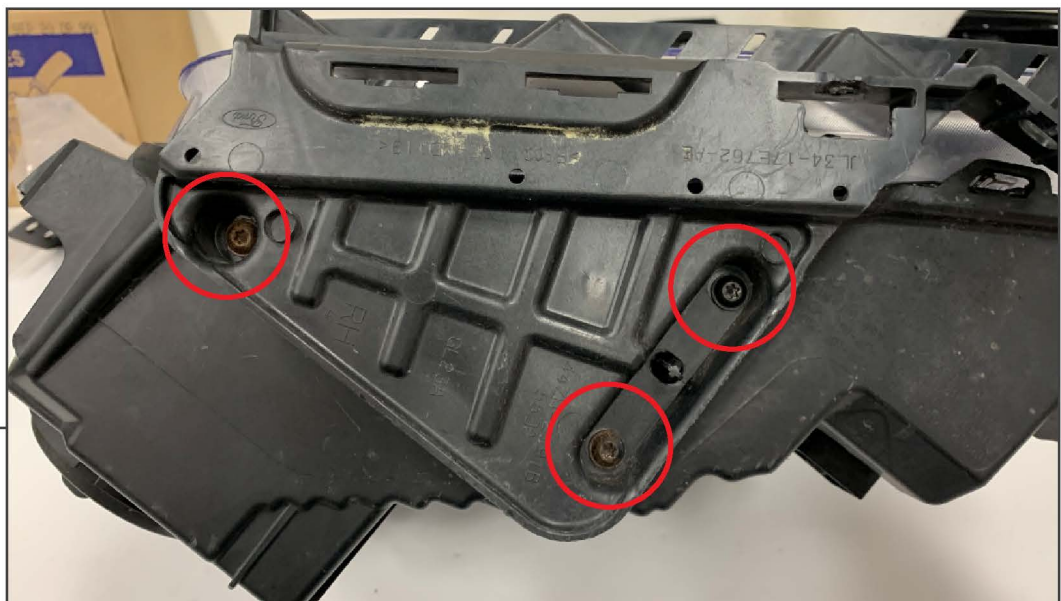


Remove the lower headlight mount from the headlight assembly by removing (3) T-25 Torx screws. Transfer the lower headlight mount to the new headlight assembly reusing the original T25 Torx screws.



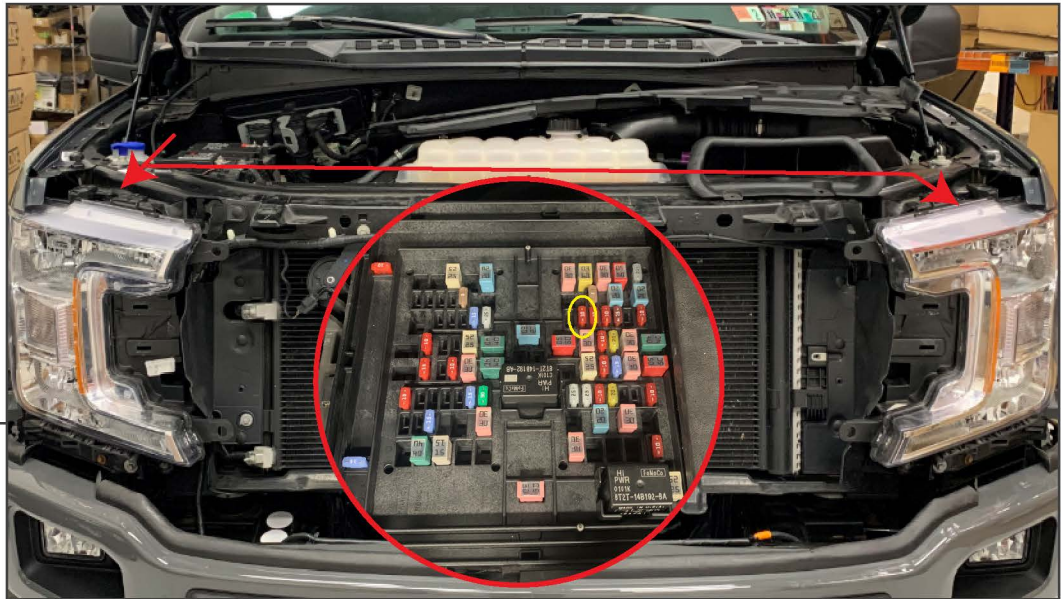

### STEP 9

Route the provided DRL wiring harness neatly from the fuse box, across the engine bay to both headlight assemblies. Replace the indicated fuse with the DRL harness.

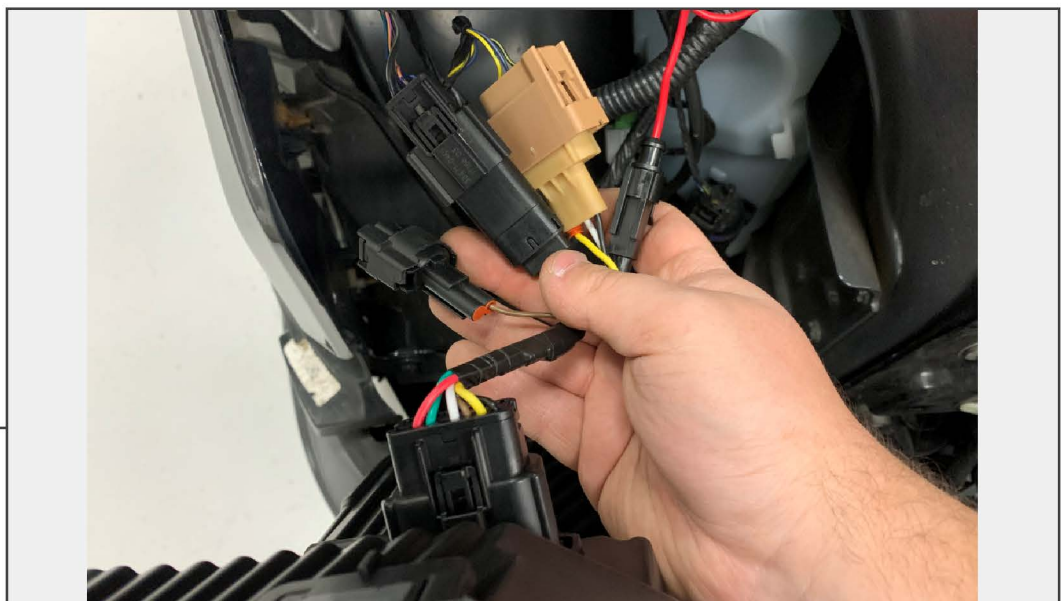

### STEP 10

Plug the provided headlight adapter harness into the headlight, and plug in the vehicle headlight harnesses into the adapter harness. Repeat this procedure to the opposite side.

**STEP 11**



Reassemble the vehicle following steps 1-7 in reverse order.

**STEP 12**



Installation is now complete.