



REPLACEMENT GRILLE WITH LED DRL

(2004-2008 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS


- (1) Grille
- (1) LH Mounting Bracket
- (1) RH Mounting Bracket
- (1) DRL Harness
- (1) Running Light Harness
- (8) Phillips Screws
- (8) Flat Washers
- (6) Flange Nuts
- (10) Zip Ties
- (6) Scotchlok Connectors

TOOLS REQUIRED

- 10mm Socket
- Phillips Screwdriver

SKU # T569085
Edited: 02/22/2022

STEP 1

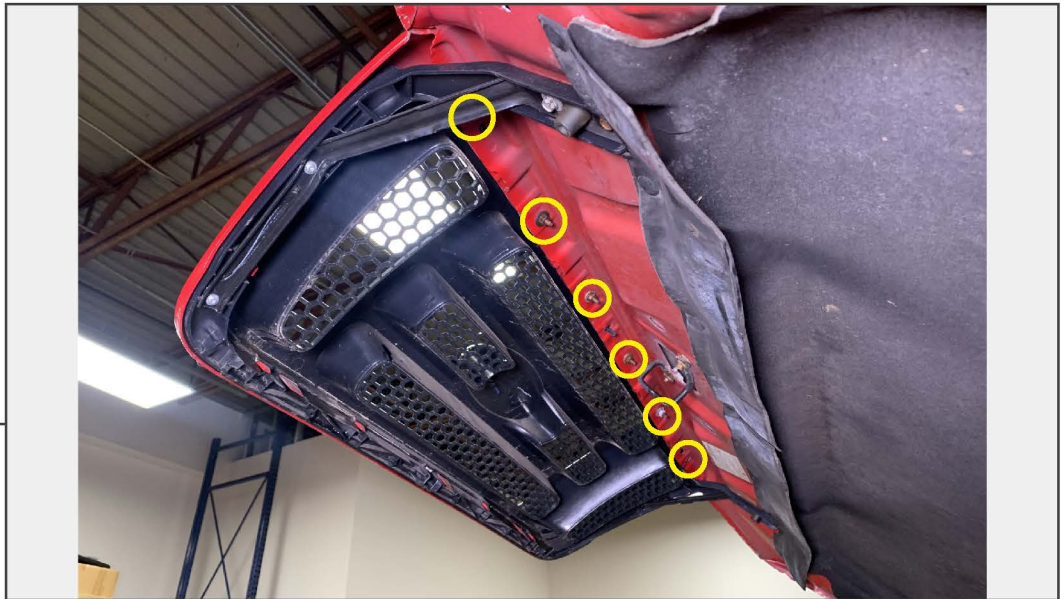

Open the vehicle hood. Remove (6) 10mm nuts securing the upper portion of the grille to the hood.

STEP 2



Remove (2) 10mm bolts securing the grille mounting brackets to the hood. Remove the grille from the vehicle.

**STEP 3**

Secure the provided mounting brackets to the grille using (4) Phillips screws.

**STEP 4**

Install the grille to the vehicle, and secure the mounting brackets to the hood using the original hardware. Secure the grille to the center of the hood using the provided (6) flange nuts. Tighten all hardware until secure.

Installation is now complete.

WIRING

Neatly route the wiring from the grille towards the back of the hood, and then down the fender to reach the headlights. Remove each headlight and wire the grille LED lights into the vehicle following the provided diagrams.

Wire the LED Running lights into the vehicle parking lamp using the following diagram.

<u>Vehicle Parking Light Harness</u>	-	<u>Grille Running Lights</u>
Brown	-	Red (+)
Black	-	Black (-)

Wire the DRL lights into the vehicle using the following diagram.

<u>Vehicle Parking Light Harness</u>	-	<u>Grille Running Lights</u>
Brown	-	Red (+)
Black	-	Black (-)
Light Green/White	-	Yellow (LH Turn Signal +)
White/Light Blue	-	Blue (RH Turn Signal +)