

LED TAIL LIGHTS

(2009-2014 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (4) Resistor Brackets
- (8) Vampire Clips
- (8) M4 Bolts
- (8) M4 Nuts

TOOLS REQUIRED

- 8mm Socket
- Ratchet
- Phillips Screwdriver
- Adjustable Wrench
- Pliers

STEP 1



Lower the vehicle tailgate. Remove (2) 8mm bolts from the side of the tail light assembly.

STEP 2




Firmly pull the tail light towards the rear of the vehicle to dislodge the (2) retaining pins.

Unplug (2) electrical connectors from the tail light by depressing the plastic tab. Twist the reverse light socket counter-clockwise to remove the socket from the tail light. Remove the tail light assembly from the vehicle.



STEP 3

Mount the resistors to the resistor brackets using the supplied hardware. Hold the M4 nut with an adjustable wrench/pliers while tightening the bolts using a Phillips head screwdriver.

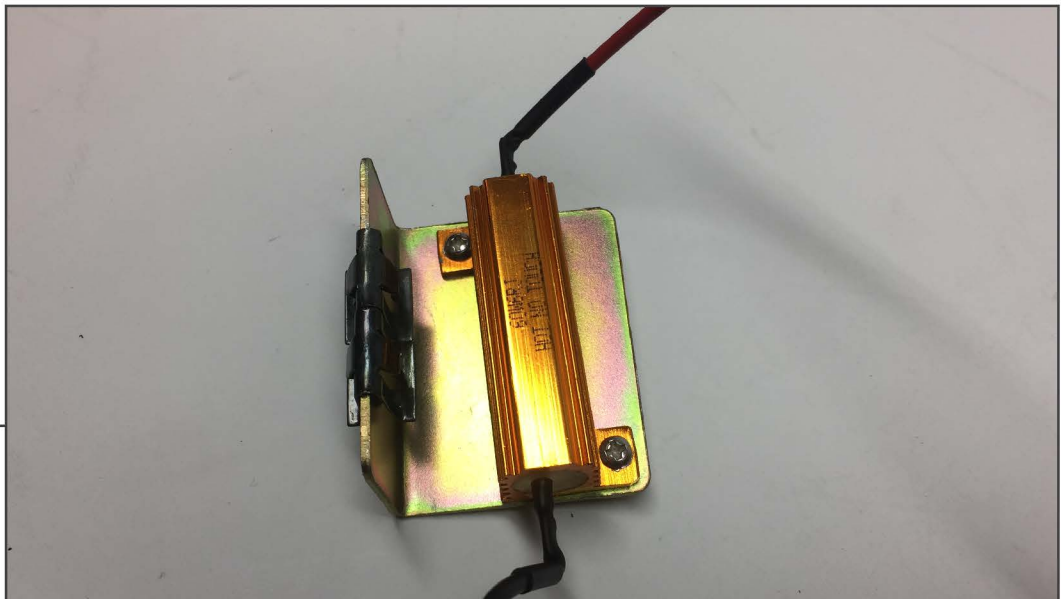

STEP 4

Using (2) vampire clips per bracket, clip each resistor bracket to the vehicle.



STEP 5

Plug in the (2) vehicle tail light electrical connectors to the new tail light. Fit the reverse light socket into the hole in the tail light, and twist clockwise to secure the socket into place.

Secure the tail light to the vehicle by aligning the (2) alignment pins, then install the (2) original 8mm bolts into the side of the new tail light.



STEP 6

Repeat steps 1-5 to the opposite side of the vehicle.

Installation is now complete.