

LED TAIL LIGHTS

(2009-2014 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Tail Light
(1) RH Tail Light

TOOLS REQUIRED

8mm Socket
Ratchet



STEP 1

Fold the vehicle tailgate downwards. Remove (2) 8mm bolts from the side of the tail light assembly.



STEP 2

Pull the tail light towards the rear of the vehicle to dislodge the (2) retaining studs.



STEP 3

Turn each light socket counter-clockwise to remove the socket from the tail light assembly. Then, remove each light bulb from the light socket.




STEP 4

Insert each tail light connector into the corresponding vehicle tail light sockets. Ensure all connections are fully inserted, and fit the sockets into the new tail light, and turn clock-wise to secure into place.

Note: Unplugging the light socket from the vehicle harness may be necessary to ensure proper initial socket fitment. Some vehicles have polarized connections, if the tail light does not work, unplug each connector and turn the connector 180* until the tail light functions properly.

STEP 5

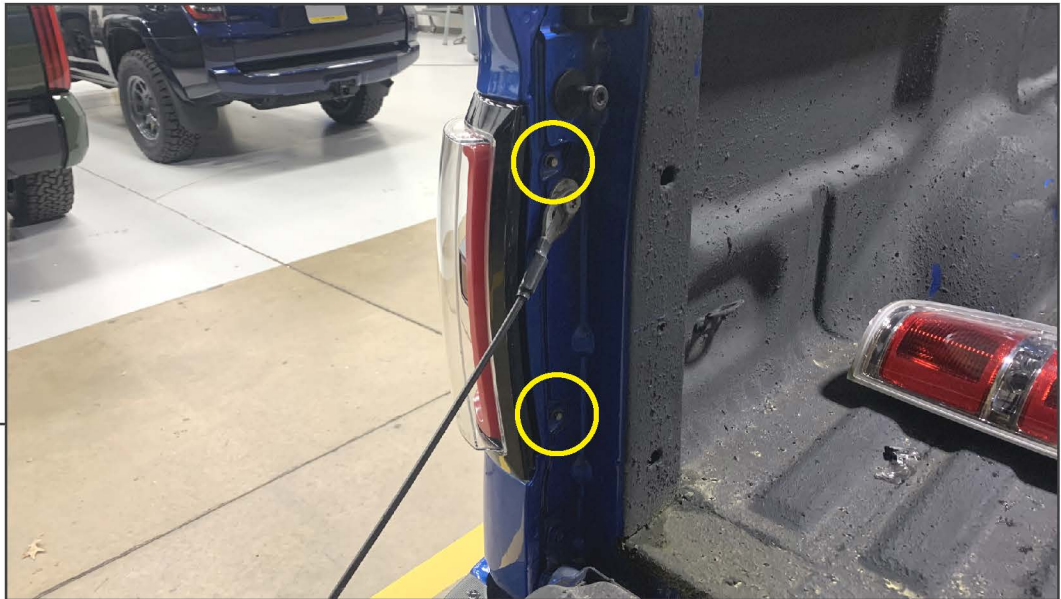

Secure the tail light to the vehicle using the original (2) 8mm bolts, the bolts will add threads to the tail light housing. Do not over-tighten.

STEP 6



Repeat steps 1-5 for the remaining tail light assembly.

Installation is now complete.