

LED HALO SURROUND HEADLIGHTS

(2018-2020 F-150)


INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Headlight
- (1) RH Headlight
- (2) Adapter Harnesses

TOOLS REQUIRED

- 8mm, 10mm, 13mm Sockets
- Ratchet
- T-25 Torx Screwdriver/Bit
- Panel Removal Tool

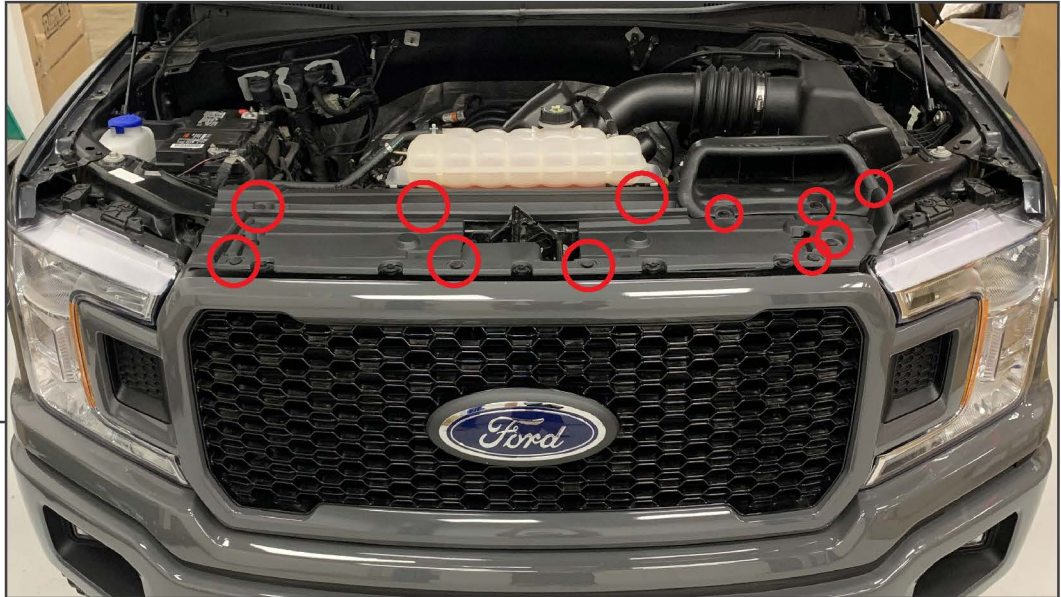

STEP 1

Remove (11) push clips from the upper splash shield. Remove the upper splash shield from the vehicle and set aside.



STEP 2

Remove (4) 10mm bolts from the top of the grille.



STEP 3

Unplug the (2) electrical connectors from the top of the grille by pushing in the plastic tab on each connector.



STEP 4

Remove (2) 7mm bolts from inside the fender well painted trim.

Repeat this procedure to the opposite side.

STEP 5




Firmly pull the trim panel away from the vehicle to dislodge the clips. Repeat this procedure to the opposite side. Remove the trim panel from the vehicle and set aside.

STEP 6



Remove (2) 8mm bolts from the bottom of the grille assembly. Remove the grille assembly from the vehicle and set aside.

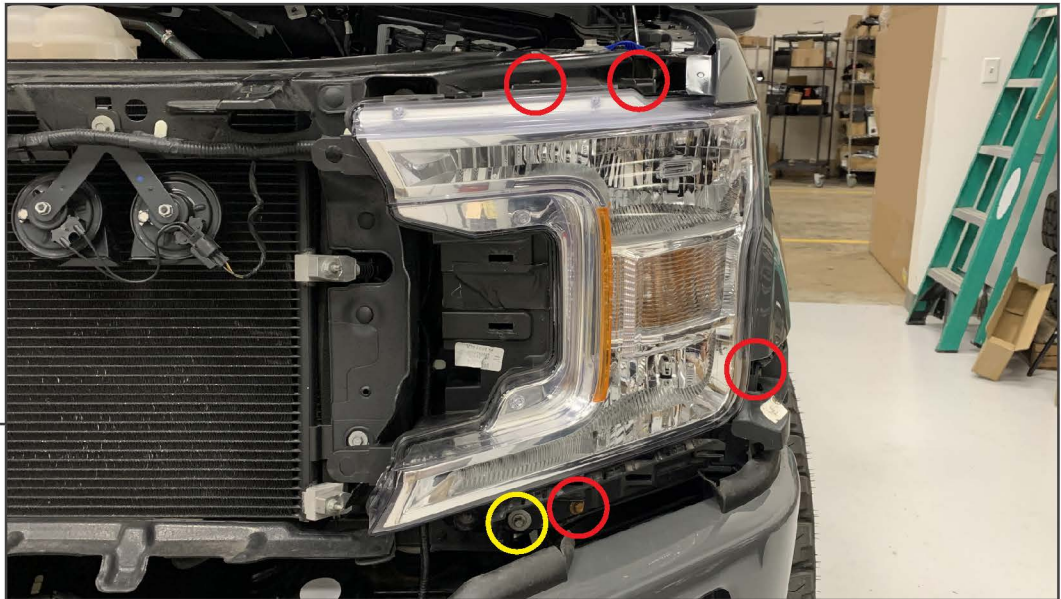

STEP 7

Remove (4) 10mm bolts, and (1) 8mm bolt from the headlight assembly. Remove and unplug the connectors from the headlight assembly. Repeat this procedure to the opposite side.



STEP 8

Remove the lower headlight mount from the headlight assembly by removing (3) T-25 Torx screws. Transfer the lower headlight mount to the new headlight assembly reusing the original T-25 Torx screws.



STEP 9

Plug the provided headlight adapter harness into the headlight, and plug in the adapter harness connectors into the vehicle wiring harness. Ensure all connections audibly click into place.

Reassemble the vehicle following steps 1-7 in reverse order.



STEP 10

Installation is now complete.