



LED HEADLIGHTS

(2009-2014 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Headlight
- (1) RH Headlight
- (1) DRL Harness
- (2) OEM HID Adapter Harness
- (1) Dielectric Grease Packet

TOOLS REQUIRED

- 10mm Socket
- Ratchet
- Needle Nose Pliers

STEP 1




Open the hood. Remove (3) 10mm bolts from the headlight assembly.

STEP 2



Firmly pull the headlight away from the vehicle to dislodge the alignment clips. Unplug (3) electrical connectors from the back-side of the headlight.


STEP 3

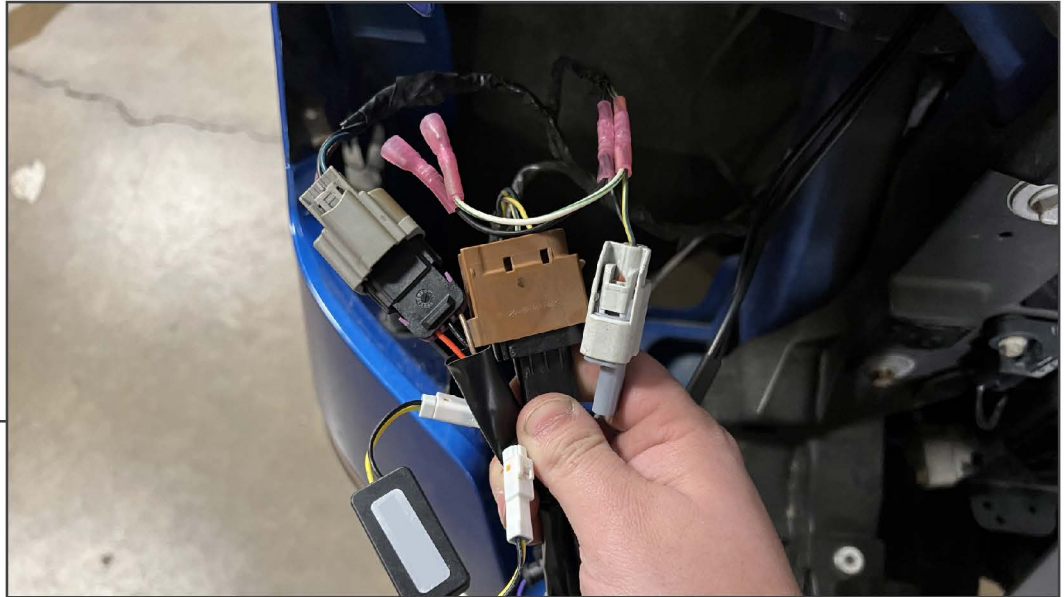

Plug in the electrical connectors into the new headlight assembly.

Note: If the vehicle has OEM HID headlights, use the included adapter harness in between the headlight and the vehicle harness.

STEP 4

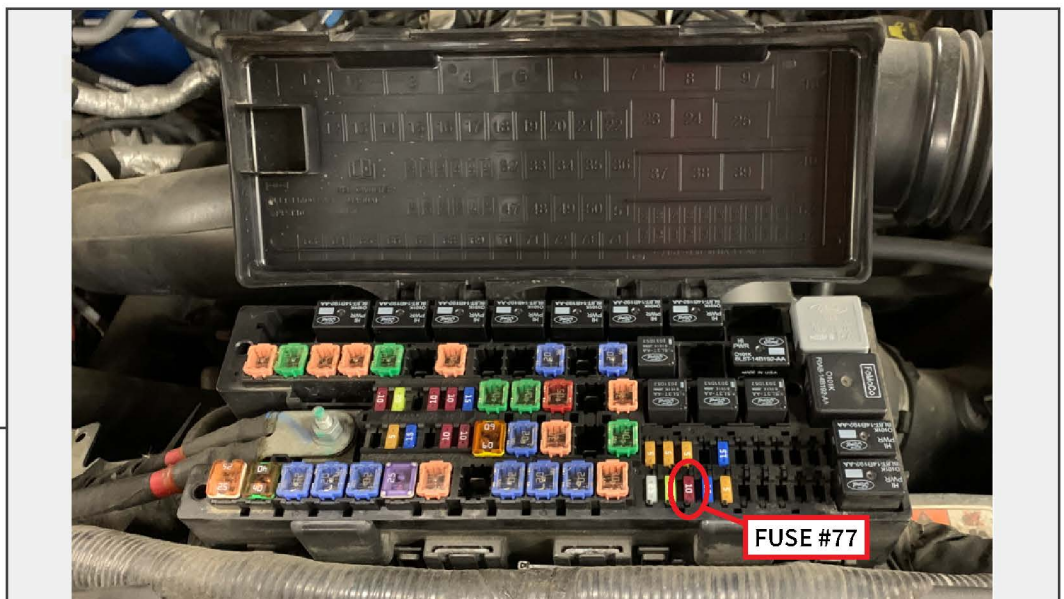

Neatly route the LED DRL harness across the vehicle to access both headlights, ensuring the fuse tap portion of the harness is towards the fuse box in the center of the radiator support. Plug in the LED DRL harness into **fuse #77 (10A)**. Plug each end of the harness into each vehicle headlight.

Note: Route the LED DRL harness away from any hot/moving components.



STEP 5

Install the headlight into the vehicle re-using the original hardware. Repeat steps 1-5 to the opposite side of the vehicle.

Installation is now complete.