

CXR SERIES LED TAIL LIGHTS

(2015-2017 F-150 w/Factory Halogen Non-Bliss Tail Lights)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) RH Tail Light
(1) LH Tail Light

TOOLS REQUIRED

8mm Socket & Ratchet
Microfiber Towel
Rubbing Alcohol

STEP 1



Before beginning the installation, remove the negative battery terminal. Next, remove the (2) 8mm bolts securing the tail light.

STEP 2




Remove the tail light by pulling the light firmly towards the rear of the vehicle.

STEP 3




Disconnect the factory tail light harness from the back of the bulb housing.

STEP 4

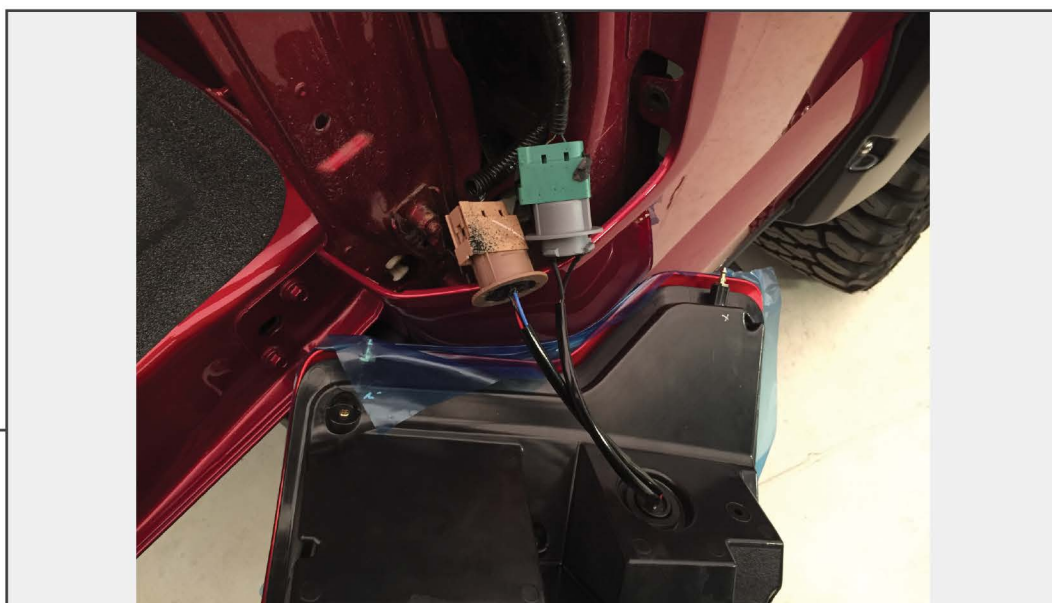

Connect the Raxiom tail light plugs to the factory harness, as shown.

STEP 5

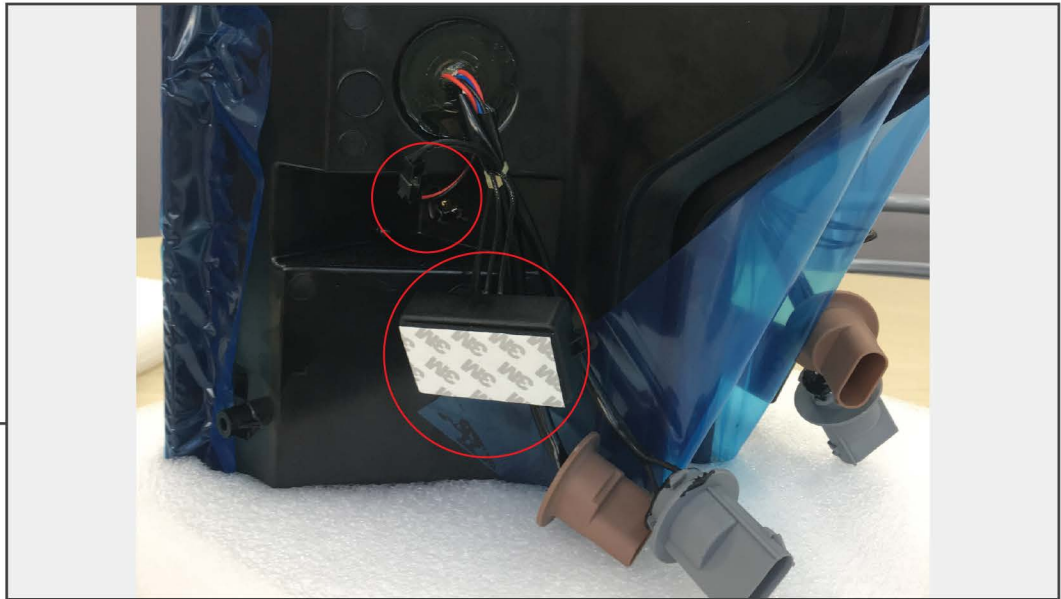

The resistor, circled in red, will need to be mounted on any flat surface inside the tail light opening. Before mounting the resistor, thoroughly clean the area with alcohol and let dry. Mount the resistor using firm pressure to fully seat the adhesive.

STEP 6



Repeat these steps for the opposite side and reinstall the Raxiom tail lights in reverse order.