

# **CXR SERIES LED HEADLIGHTS WITH LED DRL**

(2021-2023 F-150 WITH OEM HALOGEN HEADLIGHTS)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS


---

(1) LH Headlight  
(1) RH Headlight  
(1) DRL Harness

### TOOLS REQUIRED


---

7mm, 8mm, 10mm Sockets  
Ratchet  
Panel Removal Tool  
Flathead Screwdriver

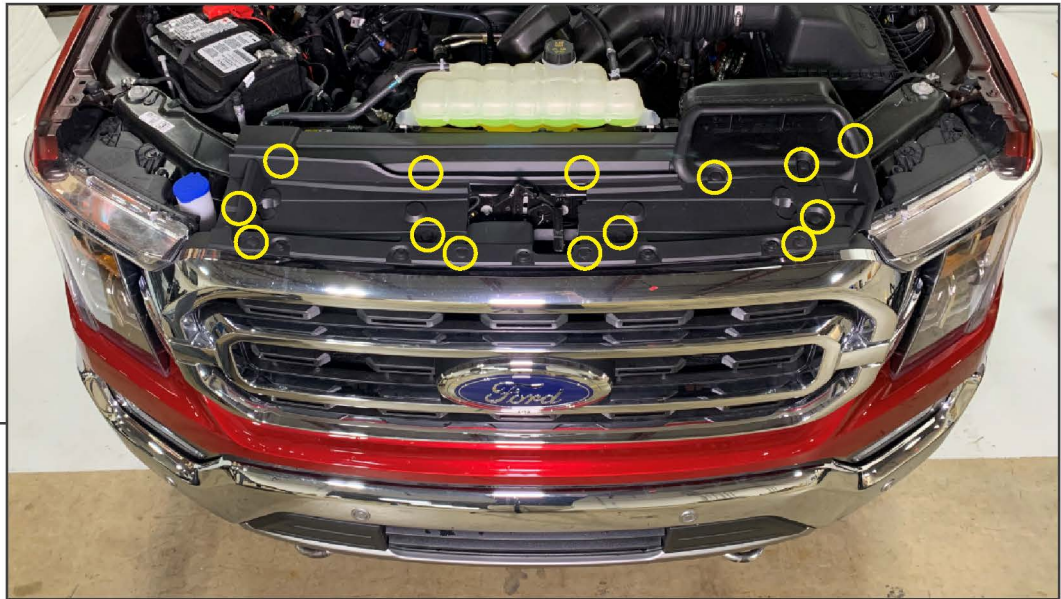


**STEP 1**

Remove (14) plastic push clips from the radiator cover. Remove radiator cover and set aside.

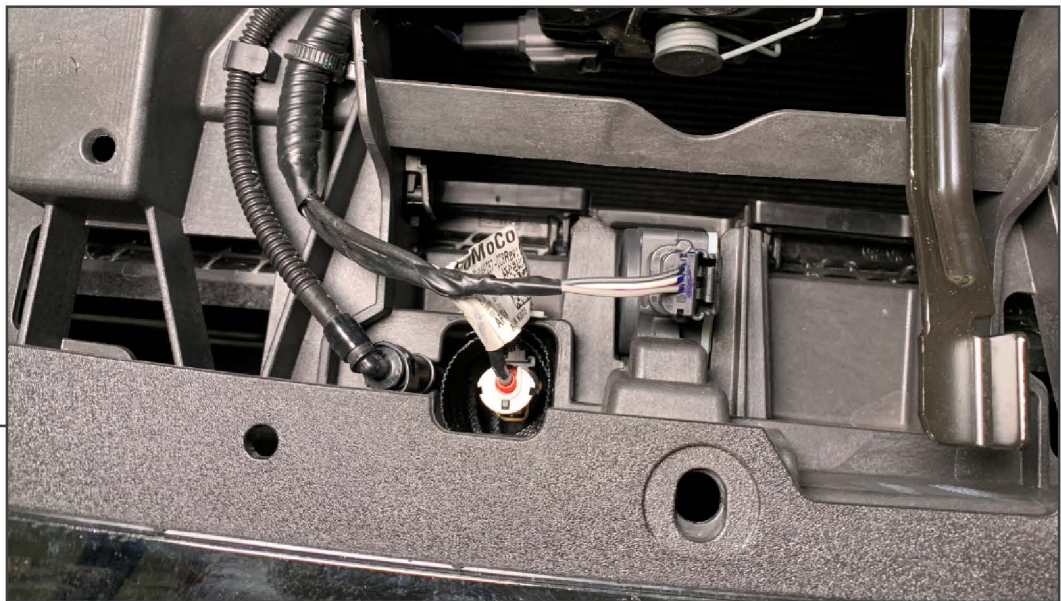

**STEP 2**

Unplug the electrical connectors under the hood release, if applicable.

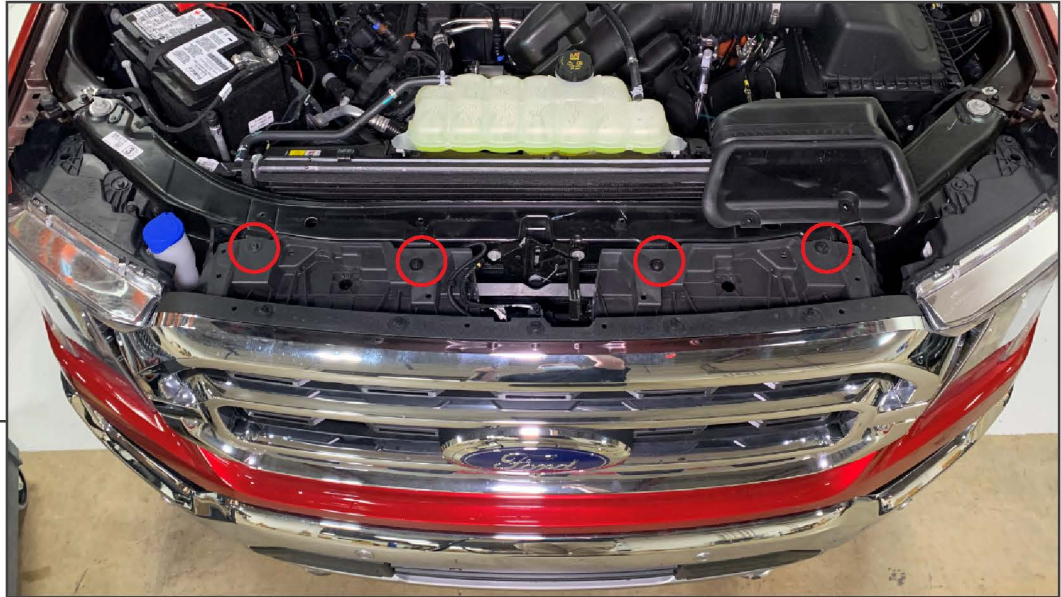

**STEP 3**


Remove (4) 10mm bolts from the radiator support to release the upper portion of the grille.



**STEP 4**


Remove (2) 7mm bolts from inside the fender well. Repeat this procedure to the opposite side.



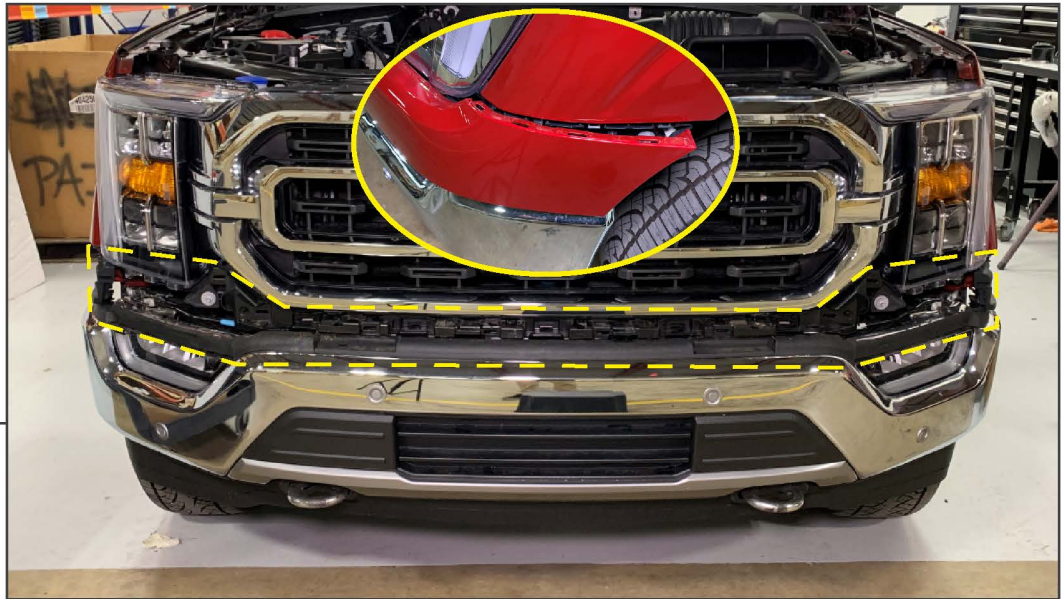

**STEP 5**


Pull the bumper trim away from the fender by firmly pulling the trim away. Repeat to the opposite side. Firmly pull the bumper trim from the vehicle and set aside.

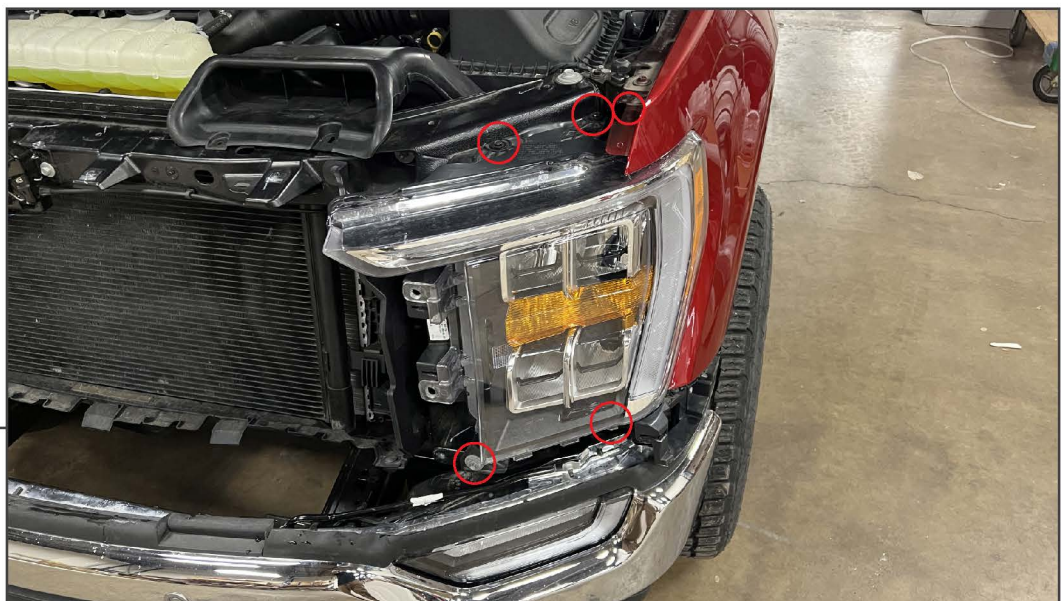

**STEP 6**

Remove (2) 10mm upper bolts, (1) plastic clip, (1) lower 8mm bolt, and (1) 10mm nut under the headlight. Then, pull the headlight assembly away from the vehicle to reveal the wiring harnesses.

**STEP 7**

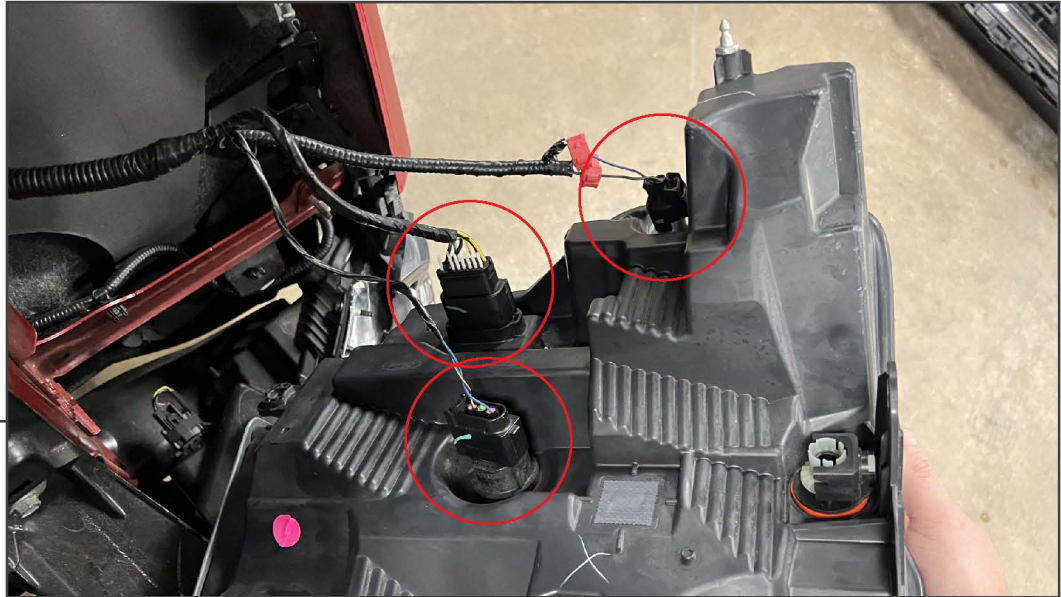

Unplug the wiring harnesses from the vehicle headlight assembly.

**STEP 8**



With the headlights removed, route the DRL harness across the vehicle from the fuse box towards each vehicle headlight mounting area. Plug the DRL harness into **fuse # 22**, and fit the cover onto the fuse box.

Ensure to route the harness away from any hot or moving components.

Note: Notching the fuse box lid may be necessary for proper DRL harness routing.



**STEP 9**



Plug each headlight harness into the appropriate vehicle wiring harness. Plug the DRL harness into each headlight DRL harness.

**STEP 10**



Re-assemble the vehicle following steps 1-6 in reverse order.

Installation is now complete.