



Installation Guide

Raptor Style Mesh Grille
For 2004-2008 Ford F150
SKU # AMFMAA00142



STEP 1



STEP 2




STEP 3

Remove the two 10mm bolts on either side and this series of 10mm nut along the top as well as the old bracket to remove the old grille.

Take out the new grille, loosen 5 screws to remove the horizontal bar. Remove the "Ford" label from the original car and install it on the horizontal bar. Finally, tighten 5 screws again to install the horizontal bar.

Put the new bracket that comes in the package onto the new grille. Then tighten all screws and bolts to reinstall the new grille onto the car.

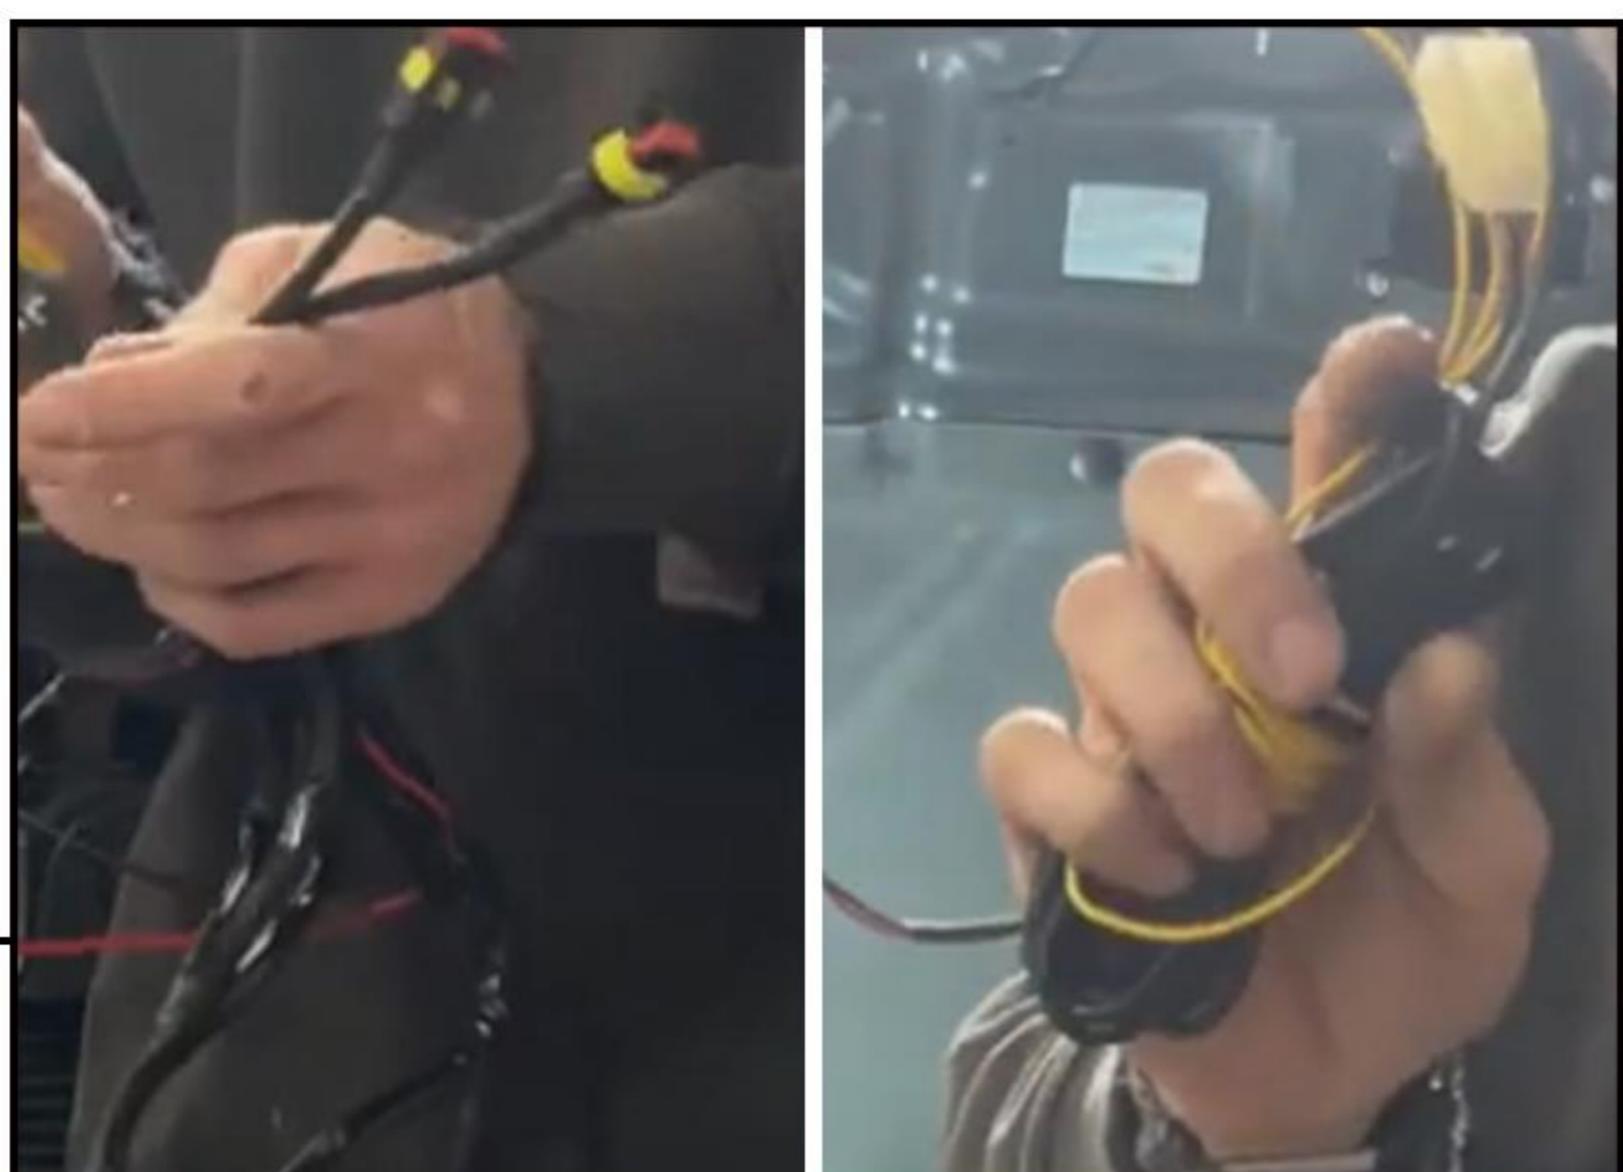

STEP 4

Amber Lights Wiring: Connect each amber light to the wiring harness that has three black connectors. Then connect the red wire to the ACC and the black wire to the negative of battery.

DRL Wiring: Connect daytime running lights with wiring harness that has two white connectors. Then connect the red wire to the ACC, the black wire to the negative of battery, the yellow wire connects to the turn signal.



STEP 5

After the wiring is completed, zip tie loose wires and hide. Close the hood to complete the installation.