

FRONT BUMPER MOUNTED 30-INCH LED LIGHT BAR AND BRACKET

(2009-2014 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LED Light Bar
- (1) LH Mounting Bracket
- (1) RH Mounting Bracket
- (1) Wiring Harness
- (2) M8x1.25 x 20mm Cap Allen Bolts
- (2) M8 Lock Washers
- (2) M8 Flat Washers
- (1) 6mm Allen Key

TOOLS REQUIRED


- T-30 Torx Socket/Key
- 6mm Allen Key

STEP 1



Open the vehicle hood. Locate the grille bumper, and remove (1) T-30 Torx screw.

STEP 2

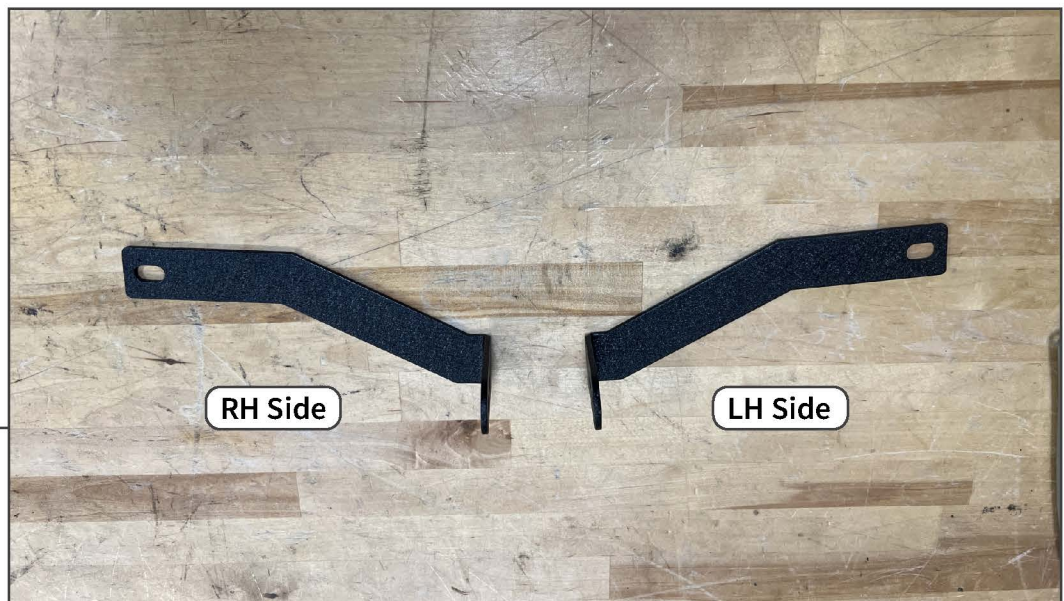


Identify the light bar mounting bracket mounting locations.

STEP 3



Loosely mount the appropriate mounting bracket to the grille bumper using the original T-30 Torx screw on each side of the vehicle.

STEP 4

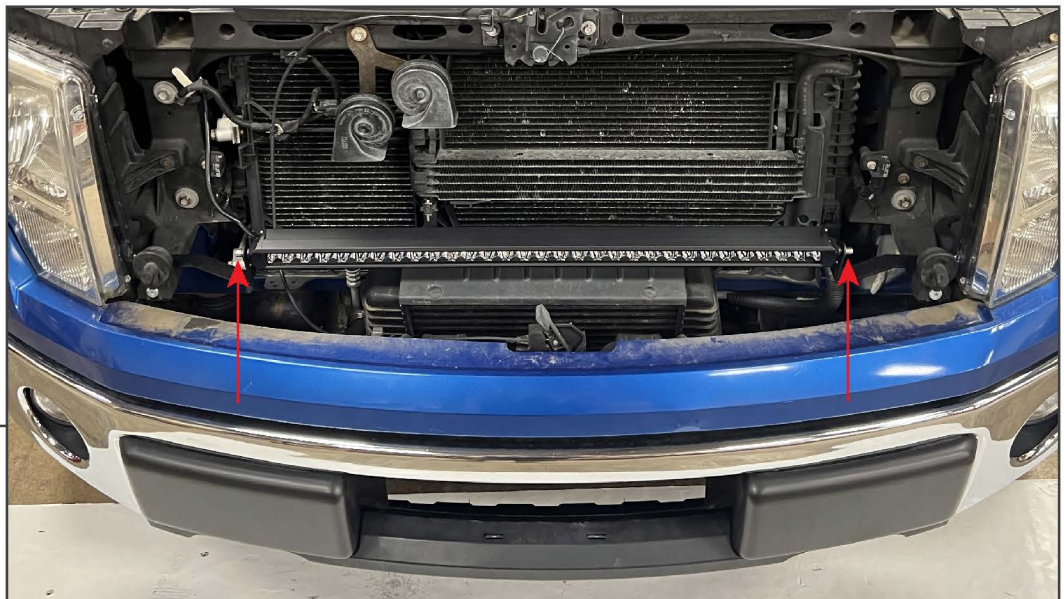

Fit the LED light bar in-between the mounting brackets, and loosely secure into place using (1) M8 x 20mm Allen bolt, (1) M8 lock washer, and (1) M8 flat washer per side.

Tighten the (2) T-30 Torx screws, then adjust the light bar into place and tighten the (2) M8 Allen bolts until the light bar is secure.

Installation is now complete.