

LDS SERIES LED TAIL LIGHTS

(2009-2014 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS


- (1) LH Tail Light
- (1) RH Tail Light
- (4) Resistor Brackets
- (8) Phillips Bolts
- (8) Lock Nuts
- (8) Vampire Clips

TOOLS REQUIRED

- 8mm Socket
- Ratchet
- Pliers
- Phillips Screwdriver

SKU # T625921

STEP 1

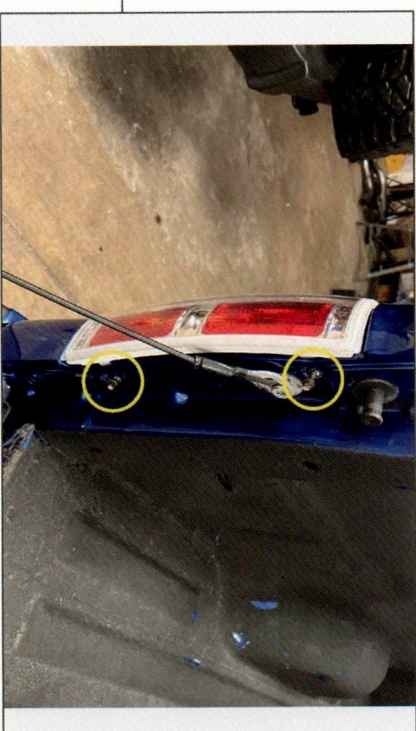


Lower the vehicle tailgate. Locate and remove (2) 8mm screws from the tail light.

STEP 2



Firmly pull the tail light away from the bed to dislodge the (2) alignment posts.

If the rubber alignment pin holders come out of the bed with the alignment post, remove the holders and re-install into the bed.

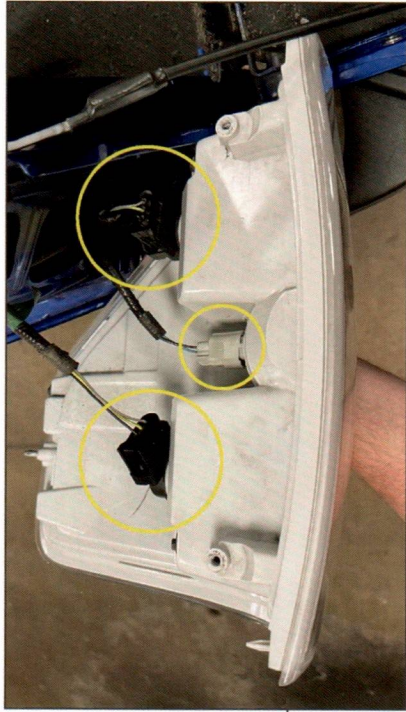


STEP 3

Unplug the (3) tail light connectors by pressing the black or gray tabs while pulling each harness from the light socket.




STEP 5

Use the included vampire clips to secure the resistor and bracket to the vehicle, use (2) clips per resistor.

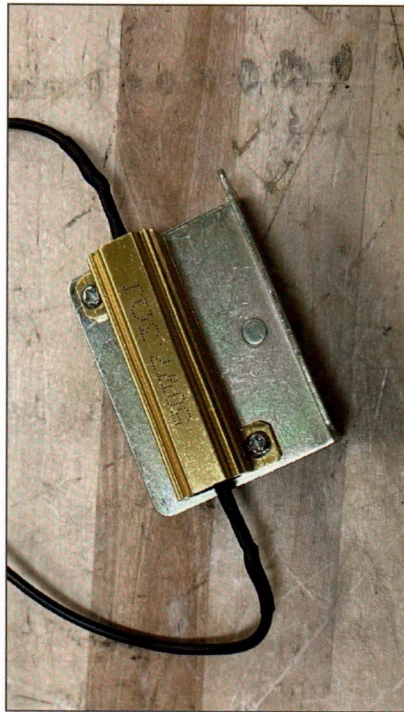

STEP 4

Fit the included resistor brackets to each tail light resistor, and secure into place using (2) Phillips bolts and (2) lock nuts per bracket.

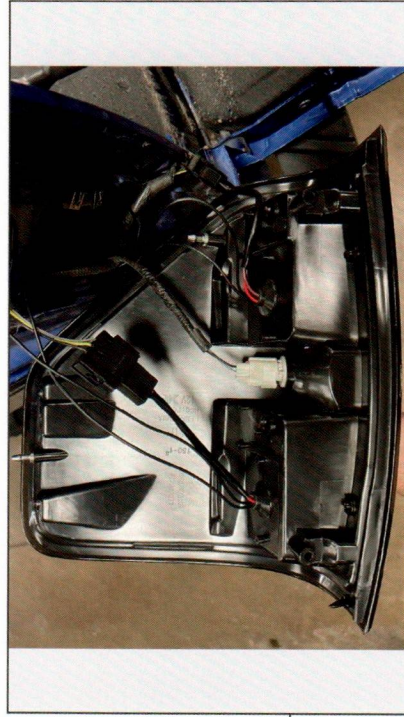


STEP 6

Plug in the (3) tail light connectors into the new tail light harnesses.



STEP 7

Fit the new tail light into the vehicle bed, and secure into place using the original (2) 8mm screws. The screws will create threads in the new tail light housing when tightening.

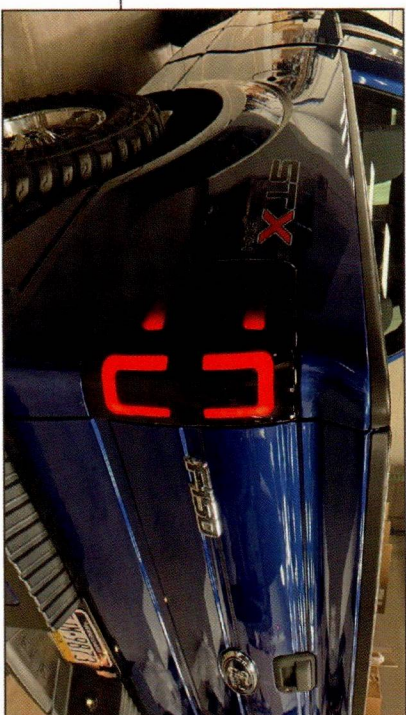

STEP 8

Repeat Steps 1-7 to install the remaining LED tail light.
Installation is now complete.