



# Installation Guide

## LED DRL & Turn Signal Lights For 2024+ Ford F150 TREMOR


SKU # AMFMAA00185 & AMFMAA00189

**STEP 1**



Open the hood and use a tool to remove all the push pins on the plastic cover above the grille.

**STEP 2**

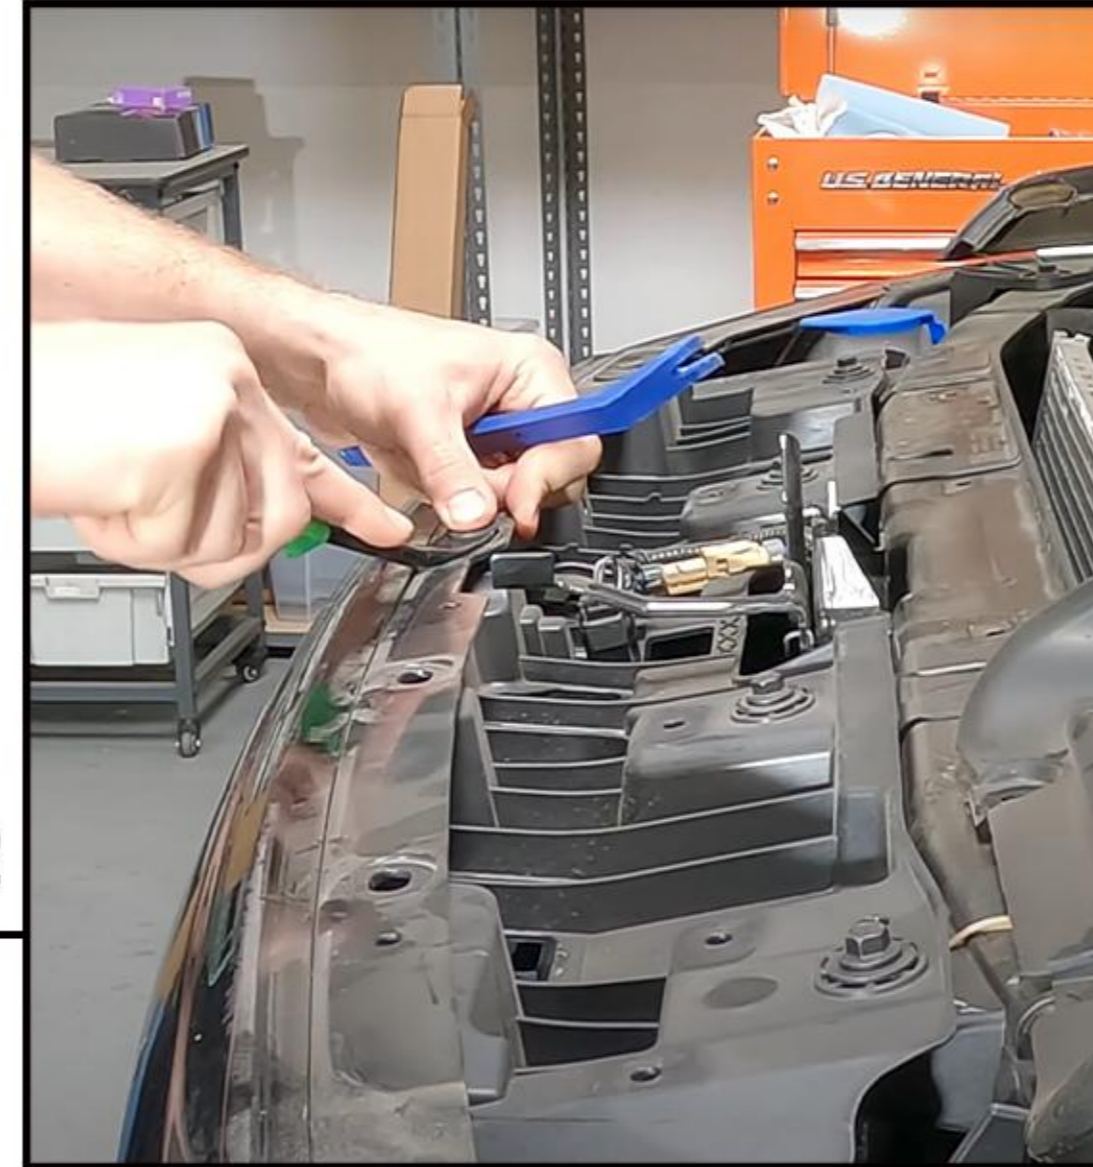


After removing the plastic cover, you will see push pins still on the top and sides of the grille. Continue to use the tool to remove it.

**STEP 3**



Remove the two 7mm bolts on the left and right sides of the front wheel. After completion, carefully remove the slim front decorative panel at the bottom of the grille.

**STEP 4**

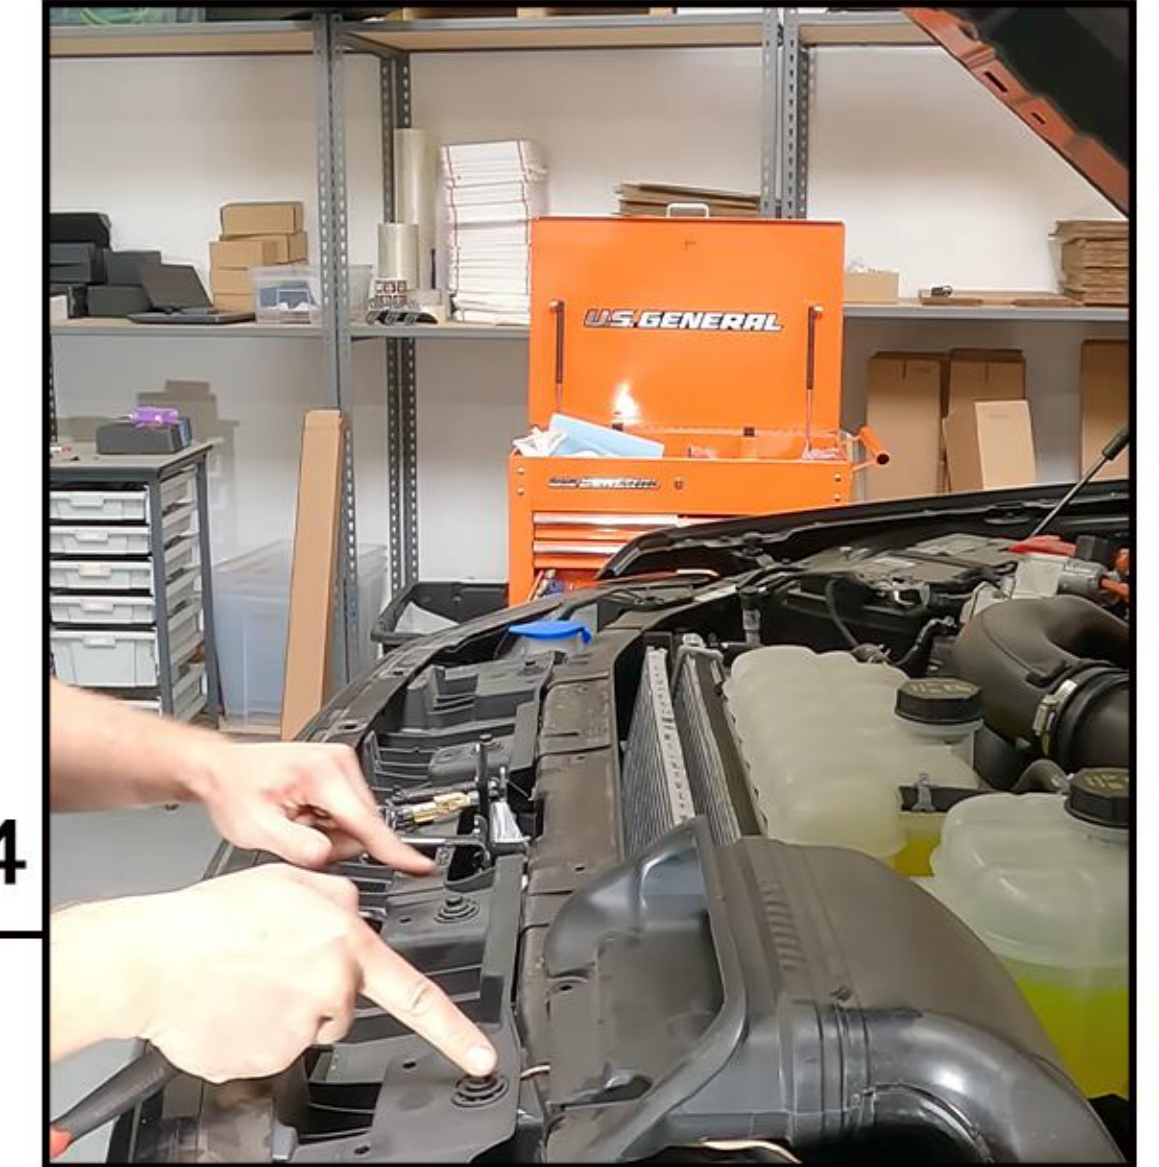

Use the tool to remove the 4 10mm bolts on the top and 2 10mm bolts on the bottom of the grille. Detach the wiring harness clips and disconnect the electrical connectors. Then carefully remove the grille.

**STEP 5**



Remove the bolt in the middle of the back of the air shutter, then push the three metal clips at the bottom to remove it.

**STEP 6**



After removing the grille, use 3M tape to fix and install the light bar on the back of the grille. L is installed on the driver side and R is installed on the passenger side.

**STEP 7**



After connecting the plug on the back of the grille, install the air shutter and then place the grille in front of the vehicle in preparation for wiring. Use fuse tap to connect the red wire to fuse 18 in underhood fuse box. Connect the yellow wire to the Headlights Harness (Blue/Green on driver side; Yellow/Tan on passenger side). Then connect the black wire to the negative.

**STEP 8**



After connecting, test whether the light works. If there is no problem, install the parts back according to the previous steps to complete the final installation.