

BAJA UPPER REPLACEMENT GRILLE WITH LEDS

(2011-2016 F-250 / F-350)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille w/ LED Lights
- (5) Lower Clips

TOOLS REQUIRED


10mm Socket Ratchet Flathead Screwdriver/Pry Tool Panel Removal Tool





STEP 1

Open the vehicle hood. Using a panel removal tool, remove the air dam plastic push pin. Remove (4) 10mm bolts along the top of the grille.

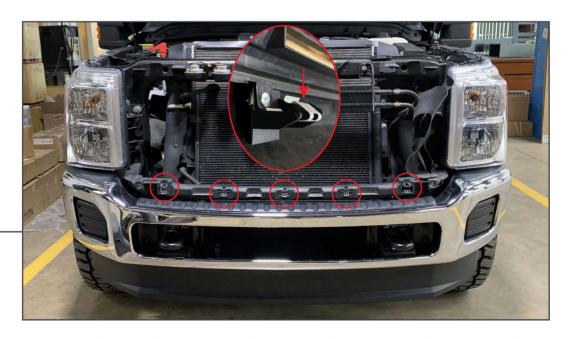

STEP 2

Slightly pull the top of the grille away from the vehicle to locate the lower metal mounting clips. Using a flathead screwdriver, disconnect the (5) metal clips securing the bottom of the grille to the radiator support. Remove the grille from the vehicle, and place on a soft surface for disassembly.





STEP 3

Remove (1) 10mm bolt from the upper grille panel. Remove (5) plastic push clips from the upper grille panel. Remove the upper grille panel, and transfer the panel to the new grille using the original hardware.



STEP 4

Install the provided (5) metal clips to the bottom of the new grille. Ensure the clips are fully placed into the mounting area.





STEP 5

LED Wiring: Remove (4) 10mm bolts from the headlight assembly. Remove the headlight and locate the parking light harness. Splice into the parking light harness using the following diagram.

<u>Grille LED Harness</u> - <u>Vehicle Parking Light Harness</u>

Black/White - Yellow/Blue

Black - Black



STEP 6

Align the grille to the vehicle and firmly press the bottom clips into the vehicle. Once clipped in, secure the grille to the upper radiator support using the (4) original 10mm bolts. Adjust as necessary for proper fitment.

Installation is now complete.