



# RUST BUSTER

## RB7723L & RB7723R Front Bed Mount 2002-2008 Dodge Ram 1500



RB7723R – Passenger's Side



RB7723L – Driver's Side

### REQUIRED TOOLS

Jack Stands or Lift  
Mig Welder  
Paint/Primer  
Hand Grinder  
Cutting Wheel or Torch  
Welding Gloves  
Welding Hood/Shield  
Ear & Eye Protection  
Sockets & Wrench  
Fire Extinguisher

### KIT CONTAINS

Front Bed Mount  
Frame Plate

### QTY

1  
1



# RUST BUSTER

## RB7723L & RB7723R Front Bed Mount 2002-2008 Dodge Ram 1500

### 1) PREPARING YOUR VEHICLE

Begin by disconnecting your battery prior to starting your installation.

Inspect your vehicle for leaking fuel lines, fuel tank and engine components. If you have fuel leaks repair all leaks prior to starting your installation. If your fuel tank is near your welding area **remove your tank prior to welding.**

Remove all combustible items above the work area such as seats, carpets, padding, etc.

**Keep all flammable materials away from the vehicle work area.**

### 2) PREPARING YOUR WORKSTATION

Keep a fire extinguisher close by in the case of fire and make sure you always have a designated "Fire Watch" to assist during the cutting or welding phases.

Abide by all apprenticed welding safety standards and practices.

Always use appropriate welding eye protection, ear protection, and work and fire safety gloves during the installation and within the work area.



### WARNING!

If you are unsure on how to perform the installation or how to operate any of the required tools listed above, it is **HIGHLY** advised that you enlist the work of a certified welder/installer.

Failure to follow proper safety precautions and instructions may result in serious injury. **The user assumes all liability when installing the product.**



# RUST BUSTER


## RB7723L & RB7723R Front Bed Mount 2002-2008 Dodge Ram 1500

### 3) **PREPARING FOR YOUR INSTALL**

Remove your beds bolts. Lift or remove your bed out of the way.

### 4) **CUT**

Cut off the factory front bed mount and any obstructions in the work area.

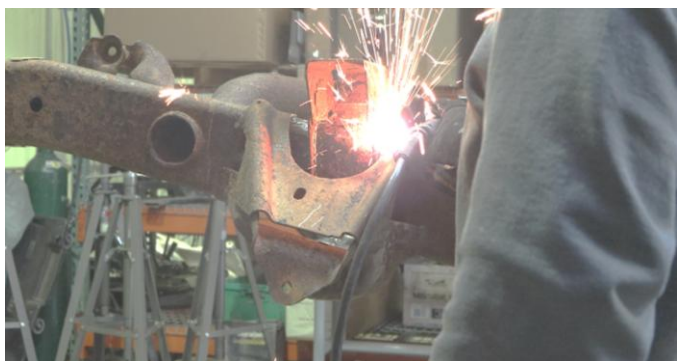

Grind the frame free of rust and debris, revealing bare metal.



Spray the work area with a weld through primer to help prevent the risk of rust development.



### 5) **WELD**

Take your replacement front bed mount and slide it onto the top of your frame rail using the factory parts silhouette to help with the alignment.

Following proper welding procedures, tack weld your front bed mount onto the frame before welding it on fully. Weld 100% around all edges.



### 6) **PAINT**



# RUST BUSTER

## **RB7723L & RB7723R** **Front Bed Mount** **2002-2008 Dodge Ram 1500**

Paint the part with primer or other rust inhibitor to help prevent or reduce the risk of rust formation.

We recommend our Rust Buster Rust Converter & Primer Spray Paint (RB9917).



### **7) REINSTALL**

Reinstall your bed and bed bolts.