



BAJA UPPER GRILLE

(2015-2017 F-150)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille
- (2) Scotch-Locks

TOOLS REQUIRED

Panel Removal Tool Socket Wrench 8mm Socket





Using a panel removal tool, remove (12) push clips to remove the plastic radiator cover from the grille.



STEP 2

Remove (4) 8mm bolts from the top of the grille.






Disconnect the (2) electrical connectors next to the hood latch.




STEP 4

Carefully pulling back on the headlight trim, remove the (2) 8mm bolts at the bottom of the grille. Remove grille from vehicle.



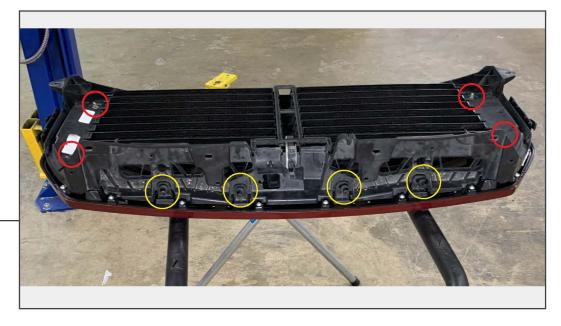


Remove the (4) push clips at the top of the grille, then the (4) 8mm nuts at the bottom. Remove inner assembly from the grille and transfer it to the new grille.

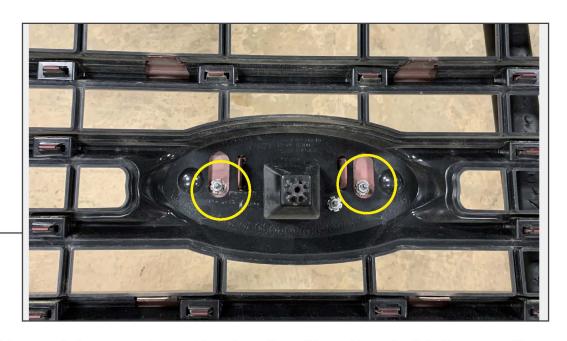

STEP 6

Remove the (2) 8mm nuts to remove the emblem from the grille and transfer it to the new grille.



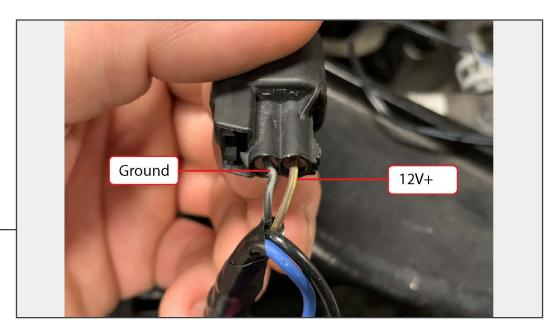

Lighting if equipped: Route the grille light wiring to the passenger side headlight. Tap into the parking light connector using (2) provided Scotch-Locks following the diagram below. Confirm lighting works before re-assembly.

Vehicle Harness - Grille Lighting Harness

Brown/Yellow (Parking Light 12V+) - Black/White

Black/Gray (Ground) - Black



STEP 8

Re-install the grille in reverse order to complete the installation.