



PART# 704140

2021+ FORD F-150 2WD

4" FRONT LIFT SPINDLES



3 HOUR INSTALL TIME



WARNING

Components	Hardware
(1)DRIVE SIDE SPINDLE	(2) M8-1.25 X 40 HEX CAP BOLT
(1)PASS SIDE SPINDLE	(2) M8 FLAT WASHER
(2) 8364SP ALUMINUM SPACER	

Max Trac Suspension recommends using a 17" x 9" wheel w/ 6.25" back spacing. Any wheel that is wider or has less back spacing "i.e. Deep Dish Wheels" can cause component failure and will void the warranty. Max Trac Suspension also recommends using a 33" x 11.5" tire with the spindle only or a 35" x 12.5" tire when combining a strut spacer with our spindle.

Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged

PRIOR TO INSTALLATION:

- 1. Factory service manual is recommended to have on hand.**
- 2. Secure and properly block vehicle prior to beginning installation.**
- 3. Always wear safety glasses when using power tools or working under the vehicle**
- 4 Modification to any part will void the warranty associated with that product**

AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION




Step 1 Jack up the front of your vehicle and support under the frame with jack stands.





Step 2 Unbolt the tie rod at the spindle and break it loose by hitting the side of the spindle, right at the joint, with a hammer and separate.



Step 3 Unbolt the sway bar end link from the neck of the spindle and separate.

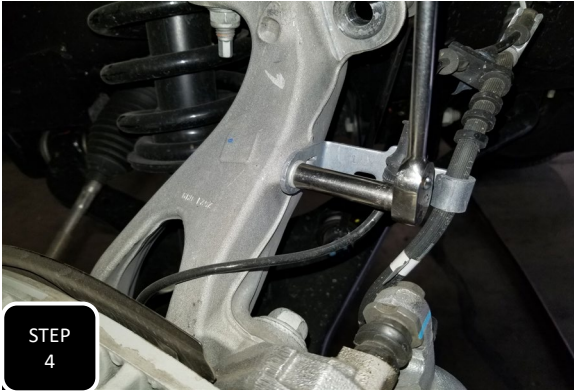



Step 4 Unbolt the brake line guide bracket from the neck of the spindle and separate.

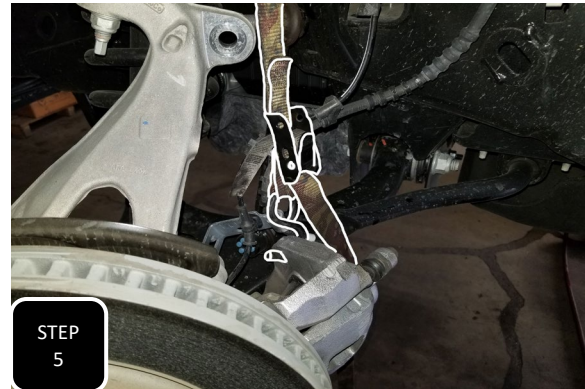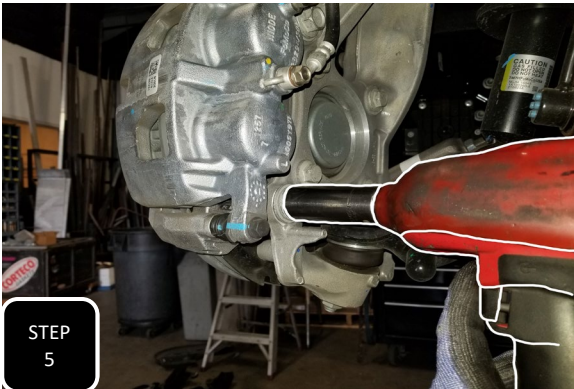

Step 5 Unbolt both brake caliper bolts and support the brake caliper up out of the way. **NOTE: NEVER ALLOW THE BRAKE CALIPER TO HANG FROM THE BRAKE LINE.**




Step 6 Remove the free floating brake rotor and then remove the upper mounting bolt on the dust shield behind it. **NOTE: IF THE BRAKE ROTOR DOES NOT JUST COME OFF, IT WILL HELP TO SPRAY WD-40 AROUND THE MIDDLE HOLE AND THEN HIT THE WHEEL MOUNTING SURFACE WITH A HAMMER TO JAR IT LOOSE.**

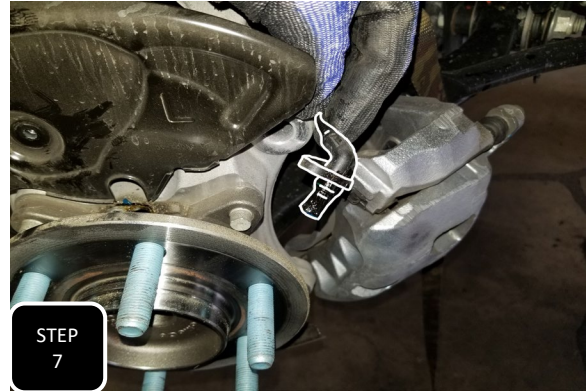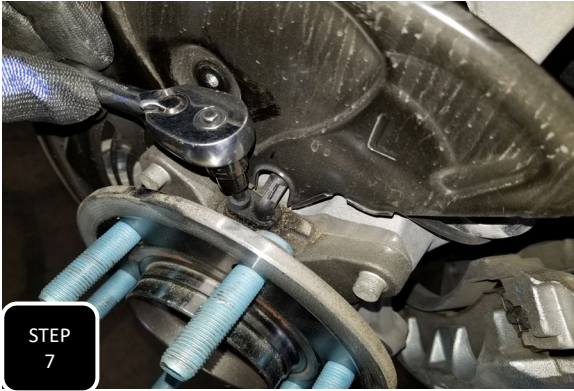



Step 7 Unbolt the ABS sensor from the top of the hub, remove it, and then hang it up out of the way so that it does not get damaged during the install.



Step 8 Loosen the nut at the upper ball joint, but do not fully remove it. Next, break the ball joint loose by hitting the side of the spindle, right at the ball joint, with a hammer. The nut will catch the spindle. **NOTE: NEVER HIT THE BALL JOINT ON THE THREADS.**

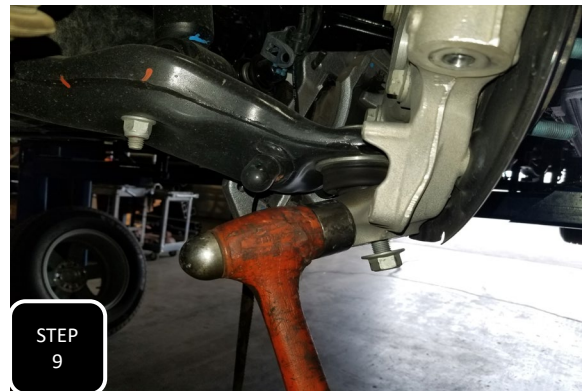

Step 9 Loosen the nut at the lower ball joint, but do not fully remove it. Next, break the ball joint loose by hitting the side of the spindle, right at the ball joint, with a hammer. The nut will catch the spindle then you can fully remove the spindle. **NOTE: NEVER HIT THE BALL JOINT ON THE THREADS.**

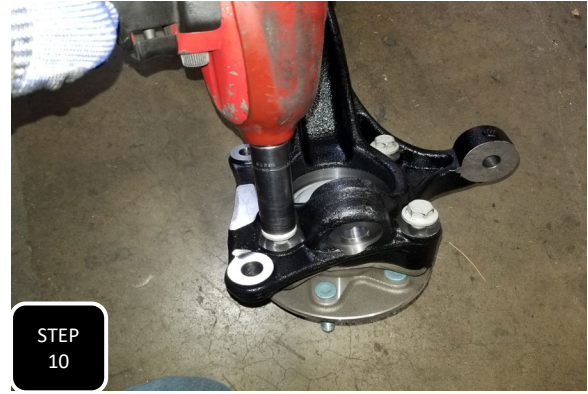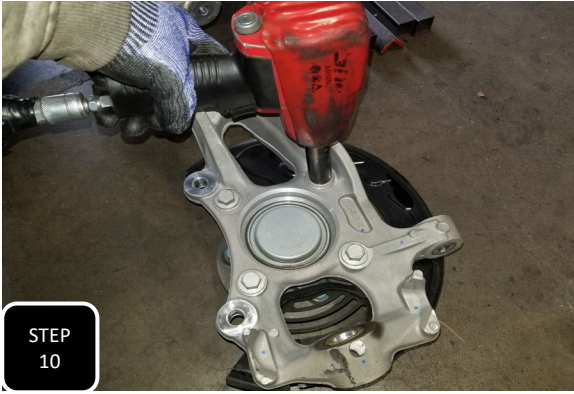


Step 10 Remove the 4 wheel bearing bolts and then separate the wheel bearing from the factory spindle. Next, attach the wheel bearing to the new spindle using the factory bolts and tighten. **NOTE: THE FACTORY DUST SHIELD WILL NOT GET RE-USED.**




Step 11 Install the new spindle using the factory ball joint nuts and tighten to factory specs.



Step 12 Attach the ABS sensor to the hub assembly using the factory socket head allen screw.

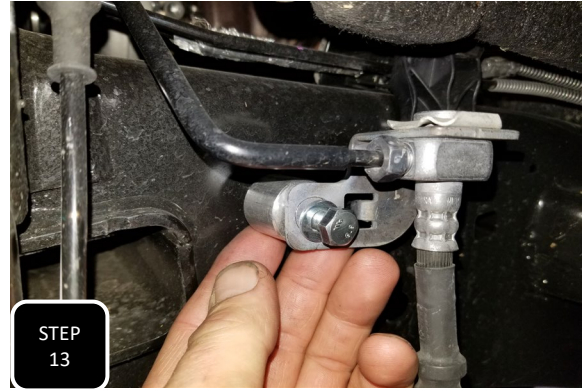

Step 13 Unbolt the the bracket where the soft brake line meets the hard brake line at the frame and install the provided aluminum spacer with the provided M8-1.25 x 40 bolt then tighten.

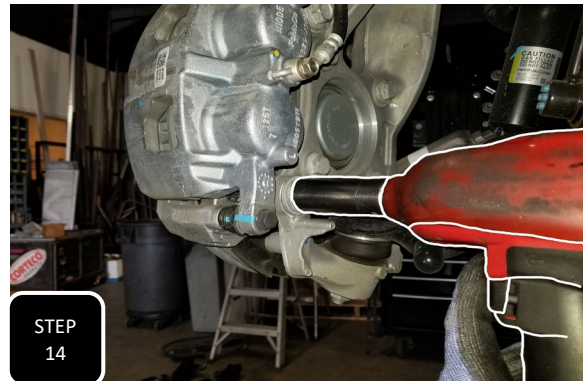

Step 14 Re-install the brake rotor and then the brake caliper using the factory caliper bolts and tighten to factory specs.



Step 15 Re-attach the sway bar end link to the neck of the spindle using the factory nut and tighten. **NOTE: THIS SHOULD ONLY BE DONE AFTER BOTH SPINDLES HAVE BEEN INSTALLED.**



Step 16 Attach the factory brake line bracket to the neck of the spindle, just above the brake caliper, using the factory bolt and tighten.



Step 17 Re-attach the tie rod to the steering arm of the spindle using the factory nut and tighten. Next, repeat steps 1-17 on the other side.

-Make sure to check the vehicle's toe before driving.

-The headlights should be adjusted after modifying the stance of the vehicle.

-The vehicle's alignment will need to be adjusted.

-All suspension components should be re-torqued after 500 miles.



MaxTrac
s u s p e n s i o n

RIDE HEIGHT SHEET

*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR _____ MAKE _____ MODEL _____

4WD / 2WD / AWD

MEASUREMENTS

*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

LIMITED LIFETIME WARRANTY

Max Trac Suspension makes no warranty, expressed or implied, as to the merchantability, fitness for purpose, description, quality, productiveness, accuracy or any other matter with respect to every product, all such warranties being hereby specifically and expressly disclaimed by Max Trac. Max Trac may offer technical advice or assistance with regard to the products based on laboratory and/or field experience and customer understands and agrees that such advice represents only good faith opinions and does not constitute a warranty or guarantee. The sole and express warranty provided by Max Trac is to warrant that the products sold as listed comply with Max Trac's specification at the date and time of manufacture. Max Trac makes no warranty that such products shall meet such specification at any time after installation of products. Use of such product is specifically not warranted, and Max Trac specifically excludes from this express warranty parts subject to normal wear and tear after one year, finish after one year, damage resulting from failure to follow recommendations in installation manuals, competition or off-road use, and damages caused by aftermarket products. Max Trac's liability and customer's exclusive remedy for any breach of this limited express warranty is limited to repair, replacement, or refund at Max Trac's option and in Max Trac's sole discretion. There are no warranties which extend beyond the description on the face hereof.

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

WARRANTY RETURN

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

NON-WARRANTY RETURN CREDIT POLICY

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

Return Exceptions

Merchandise that has been installed, used, or altered may be subject to no credit.

Restocking Fee

All items are subject to a restocking fee based on the condition of the packaging and product.

Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt.

All returns will be credited to your Maxtrac account.



INSTALLATION WARNINGS

READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.

MA TRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

MA TRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

Final Checks Adjustments

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and ABS lines for adequate slack at full extension, and adjust as necessary.



ADDITIONAL WARNINGS

WARNING

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A Factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

FAILURE TO PERFORM POST INSTALLATION INSPECTION AND OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND OR PERSONAL INJURY OR DEATH.

RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THERAFTER.

Vehicle Handling Warning

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

Wheel Alignment Headlamp Adjustment

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

Braking Warning

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



SAFETY WARNINGS

SAFETY WARNING

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any MaxTrac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any MaxTrac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

DAMAGE, INJURY AND OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.



MAXTRAC SUSPENSION
4522 E EISENHOWER CIR
ANAHEIM, CA 92807
714-630-0363
WWW.MAXTRACSUSPENSION.COM
SALES@MAXTRACSUSPENSION.COM

PRODUCT: 833130 STRUT EXTENSION LEVELING KIT, 3.0"
2004 - 2013 FORD F150 2WD

PARTS LIST	QTY
STRUT SPACER	2
10mm X 1.25 FLANGE NUT	6

Please double check the parts list before beginning the installation, to ensure all parts are present. If parts are missing, please contact Maxtrac Suspension immediately, 714-630-0363. Read the instructions thoroughly before installation.

PRIOR TO INSTALLATION:

1. Factory service manual is recommended to have on hand.
2. Make sure that all parts in the parts list are present, and do not start the installation without a full set of parts.
3. Secure and properly block vehicle prior to beginning installation
4. Always wear safety glasses when using power tools or working under the vehicle
5. Modifications to any part will void the warranty associated with that product.

After removing parts from vehicle, save hardware for reinstallation

IT IS RECOMMENDED THAT YOU HAVE YOUR VEHICLE'S ALIGNMENT CHECKED WHENEVER INSTALLING NEW SUSPENSION. IT IS ALSO RECOMMENDED THAT YOU ADJUST YOUR HEADLIGHTS WHENEVER THE VEHICLE'S RIDE HEIGHT IS ALTERED.

INSTALLATION STEPS

1. First, remove the driver side front wheel. Unbolt the two 10mm brake line bracket retaining bolts. Unhook the ABS wire from the brake line support, brake line bracket, and coil tower.
2. Remove the 21mm tie rod nut. Separate the tie rod from the steering knuckle. Unbolt the upper sway bar end link.
3. Loosen, but do not remove the upper ball joint nut. Break the upper ball joint loose from the steering knuckle. Do not remove the upper ball joint nut.
4. Remove the lower strut mounting nut and bolt.
5. Remove the two lower control arm mounting bolts. Use a jack to support the lower control arm and take pressure off the bolts during removal. Remove the three upper strut mounting nuts. Push the lower control arm down a little and remove the strut. Place the bottom of the strut in a vice. Install the MaxTrac strut extension using the factory hardware.
6. Install the lower strut mounting bolt, do not tighten. Use a jack to raise the lower control arm back into the frame pocket.
7. Make sure the upper sway bar end link gets reinstalled at this time. Torque to factory specs.
8. Install the two lower control arm bolts but do not tighten.
9. Tighten the upper ball joint. Torque to factory specs. Tighten the three upper strut mounting nuts, reinstall the tie rod end, and tighten the lower strut mounting nut. Install the two 10mm brakeline support bolts. Install ABS wire back into the brake line support. Repeat steps 1-9 on opposite side.
10. With the vehicle on the ground tighten the lower control arm bolts. Double check all hardware and torque to factory specs.
11. After 50 miles of driving, re-torque all hardware.
12. Perform Alignment.