




Installation Guide

Raptor Style Mesh Grille
For 2015-2017 Ford F150


SKU # AMFMAA00144

STEP 1

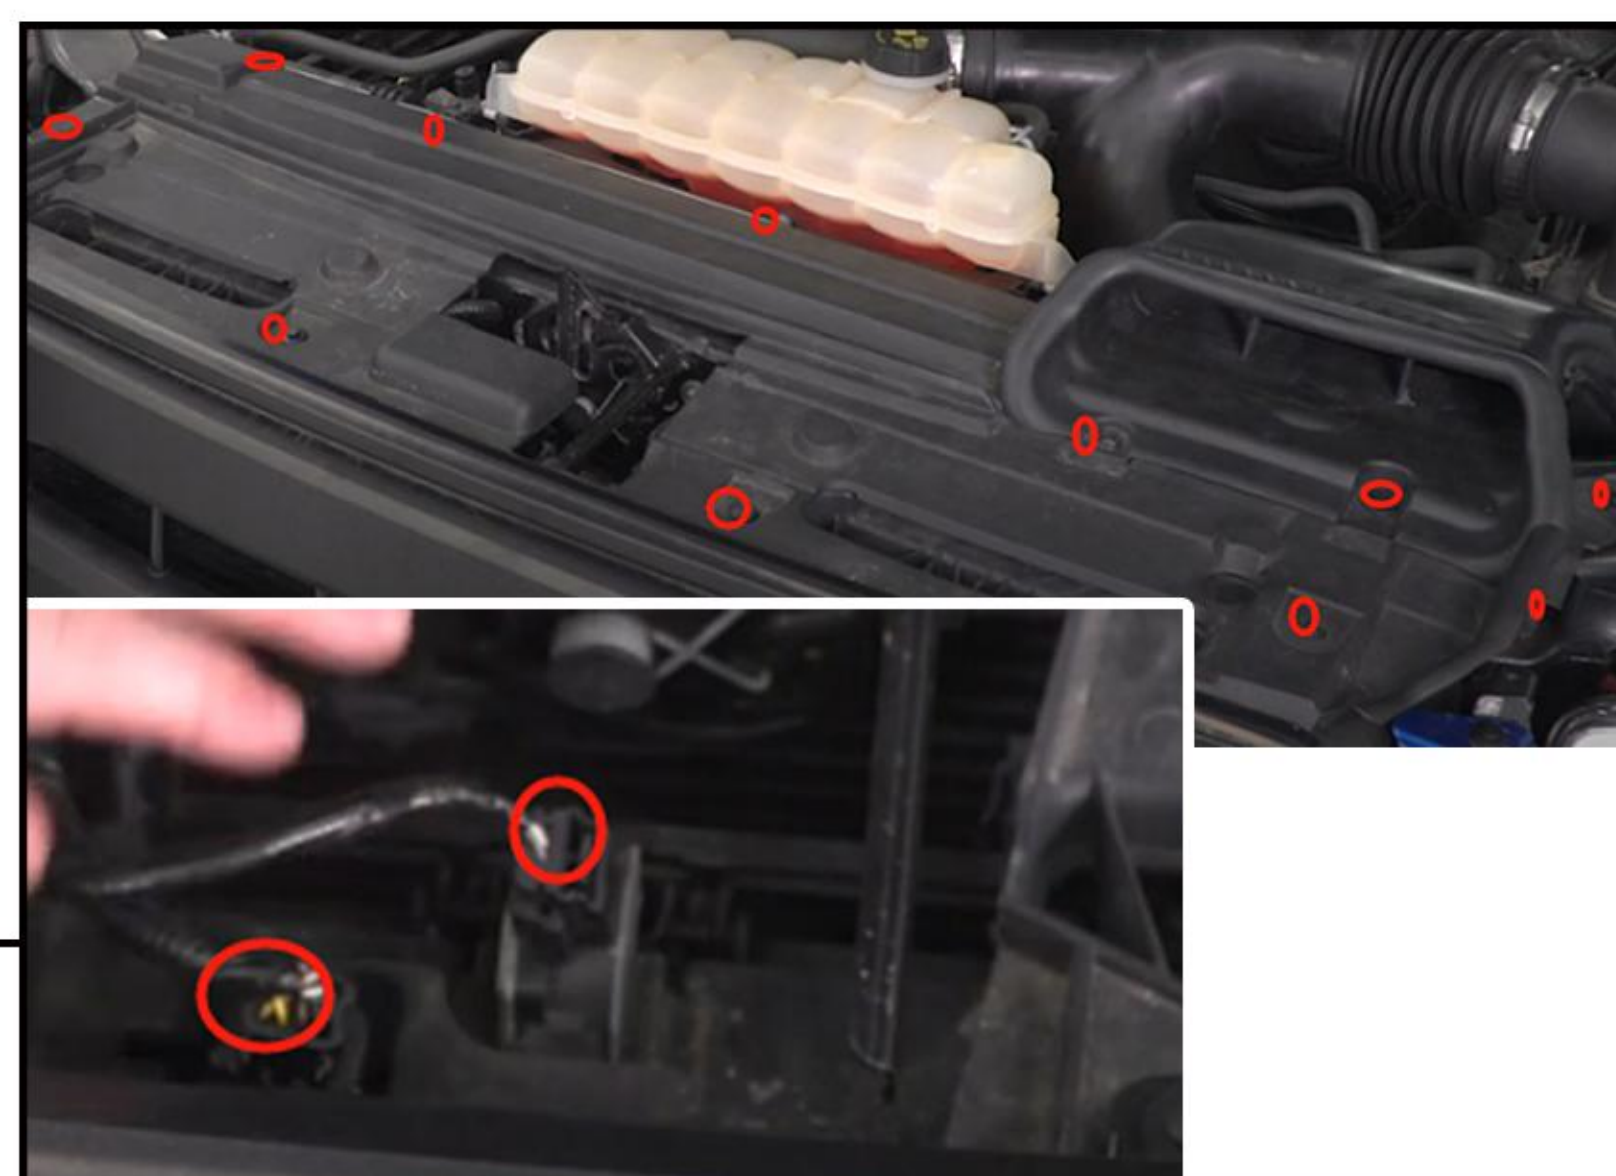


Open the hood, remove 12 push pins located at the top of the radiator guard to remove the upper radiator guard. Then remove the two electrical connectors located in front of the hood latch.

STEP 2

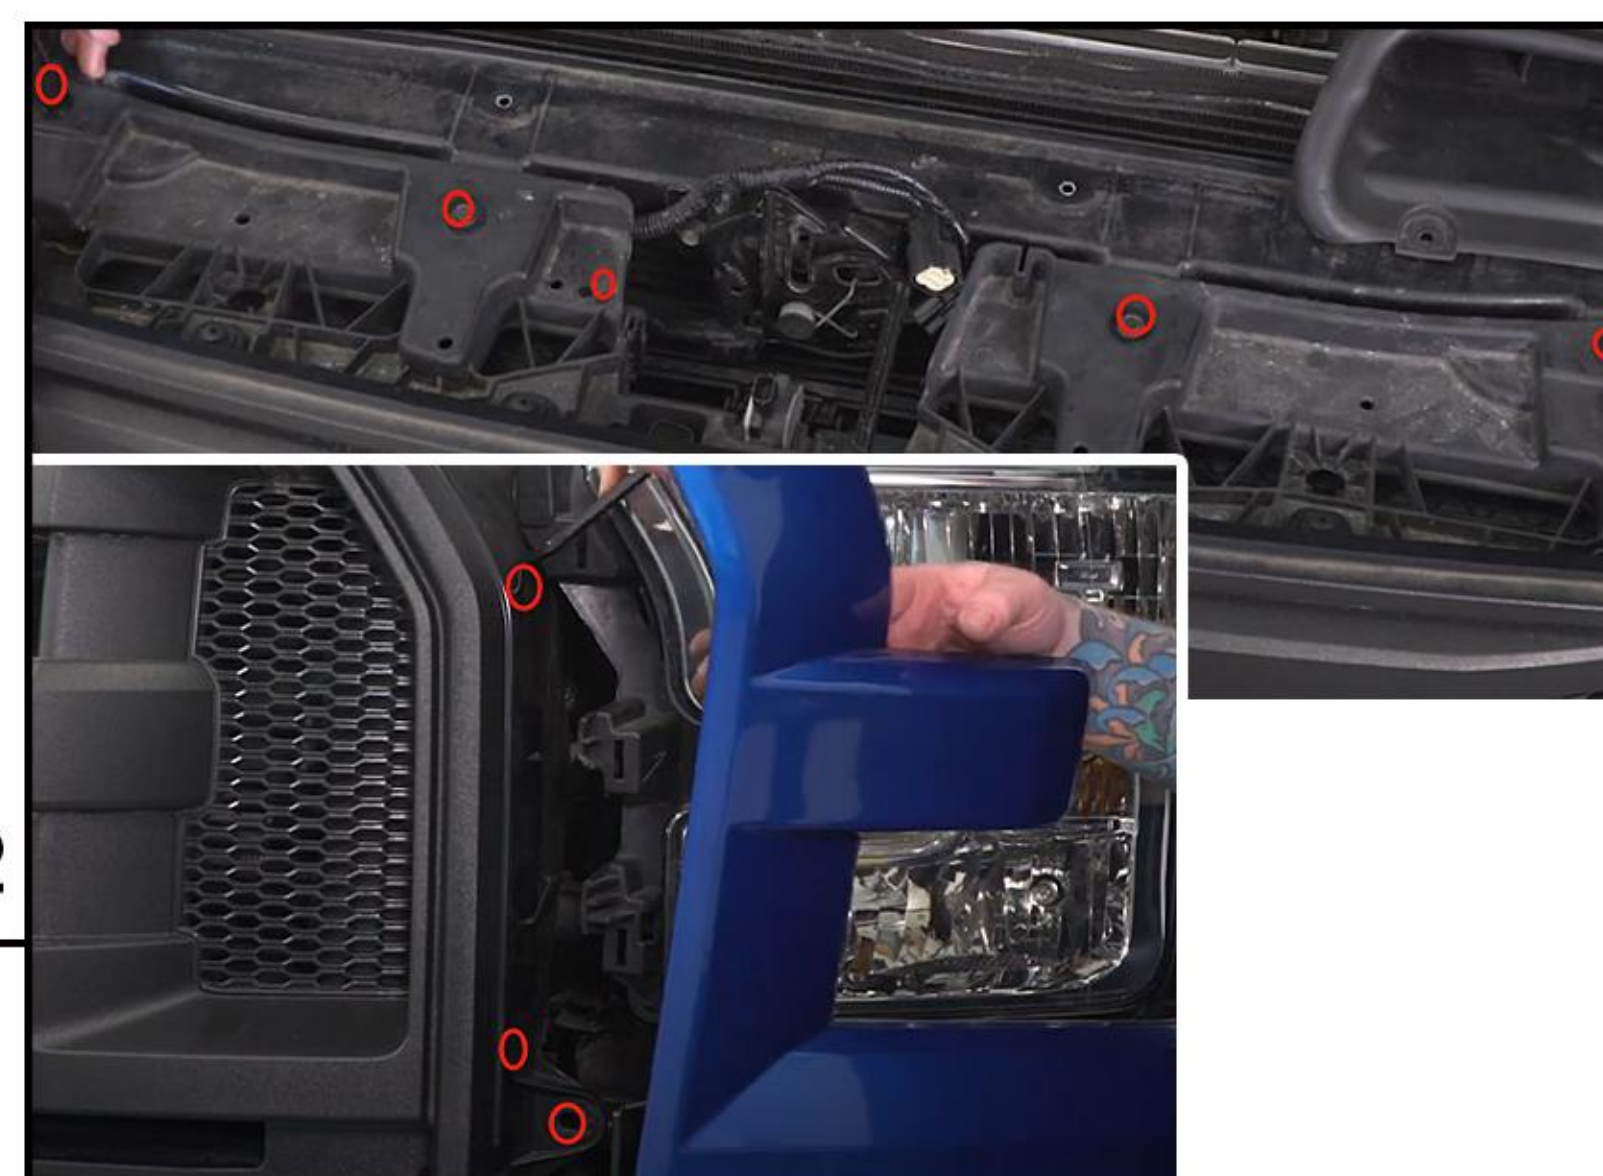

Remove the clip holding your harness in place for your electrical connectors. Then remove the 4 top bolts. Gently pull back on our headlight trim panel to get the bottom mounting bolt removed. Then remove the 2 push pins to separate our soft shroud from the side of the grille. Finally remove the grille.

STEP 3

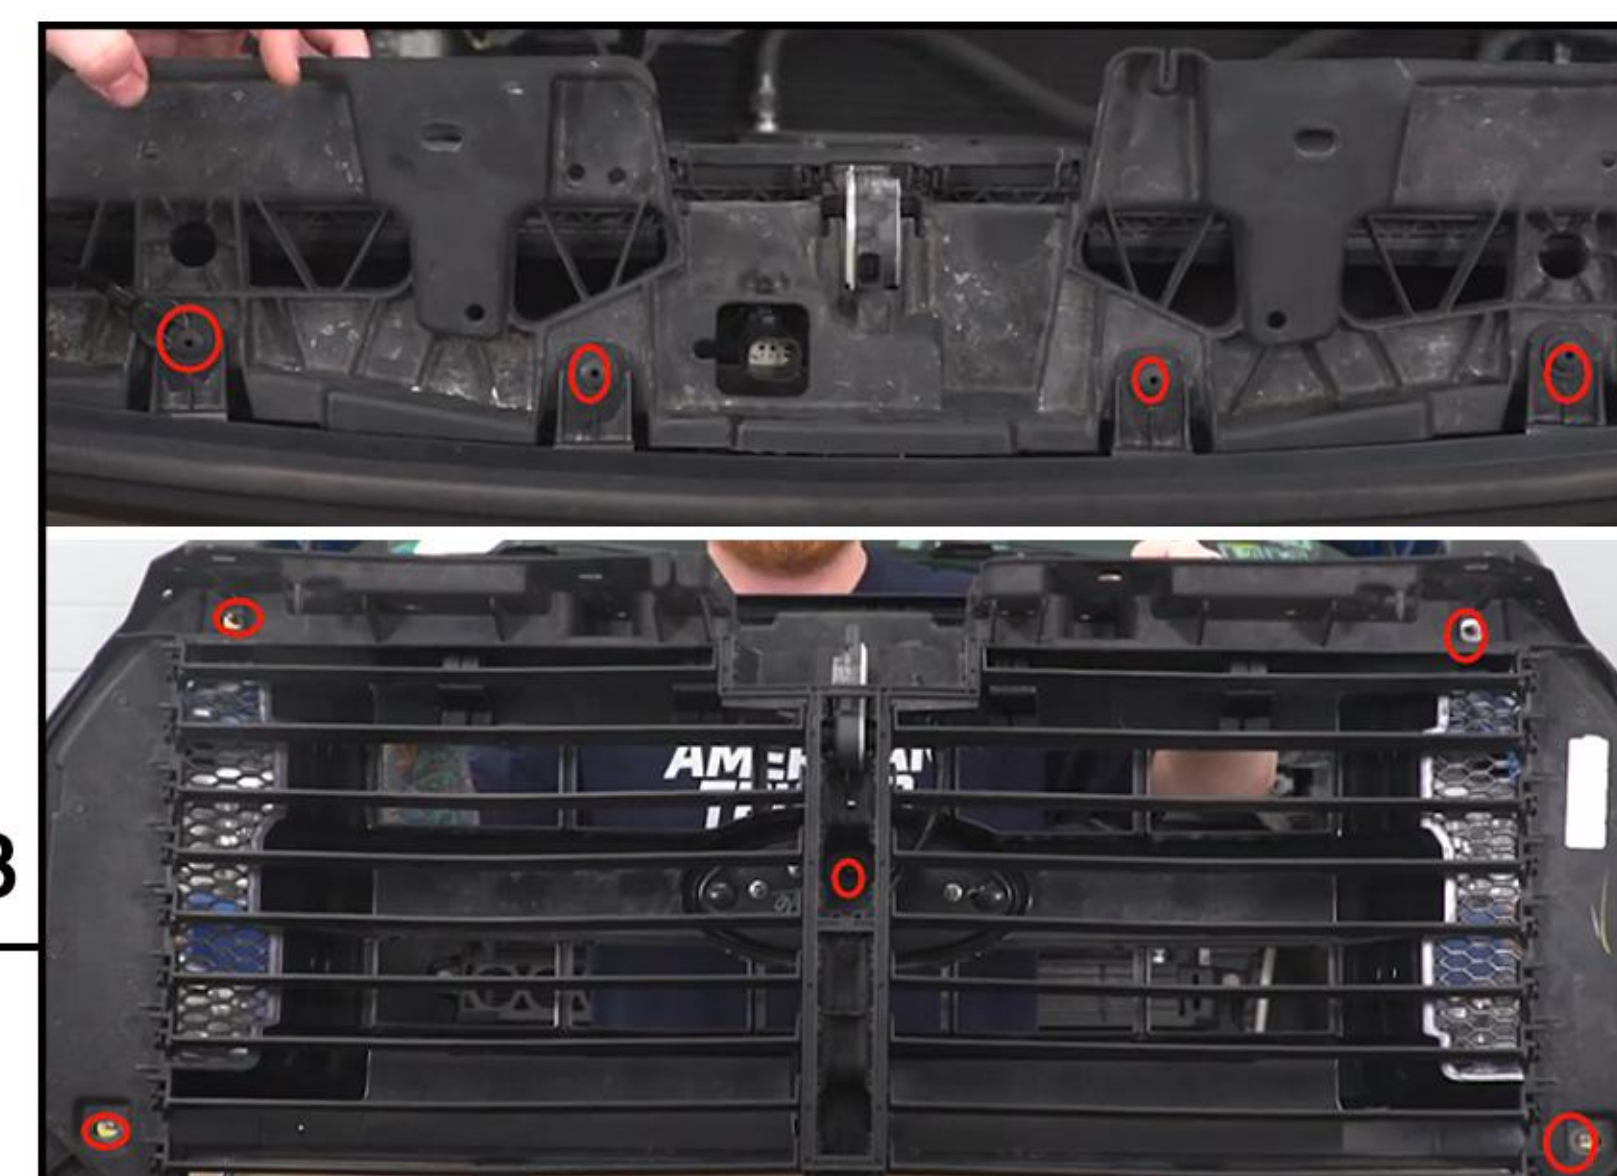

Remove 4 push pins up top, 4 bolts around the side and a Torx bolt in the middle to separate inner grille from outer grille.

STEP 4



Remove the 3 nuts to remove your emblem, then loosen 5 screws of the new grille to remove the horizontal bar. Install the emblem and reinstall the bar. Follow the step 3 in reverse order to assemble inner grille with the new grille.

STEP 5



Connect each amber light to the wiring harness that has three black connectors. Crimp the male spade connectors onto the positive and negative. Remove bolts to disconnect the headlight, place T-taps on the positive and negative wires of the headlights separately, then plug the red wire of the grille into the positive wire of the headlight and black to the negative wire. Reinstall the headlight.

STEP 6



Connect daytime running lights with wiring harness that has two white connectors. Then connect the red wire to the ACC, the black wire to the negative of battery, the yellow wire connects to the turn signal. Follow the step 1 & 2 in reverse order to install the new grille to complete the installation.